

POWER™


GXS4301i 4300 Watt Inverter Generator

- **Powered By:** 149cc OHV high performance 4 cycle engine
- **High Output:** 4,300 starting watts - 3,450 running watts on gasoline
- **Pure Power:** <3% THD of clean power output, sensitive electronics safe
- **Low Idle Technology:** Adjusts RPM based on demand, saving fuel
- **Quiet Operation:** Ultra Quiet - ideal for home, camping, tailgating & RV
- **Compact Design:** Lightweight and easy to transport with integrated handle
- **Digital Data Center:** Provides voltage, frequency, hours, power & fuel levels, output/overload/oil level status along with fuel saving low idle and reset functions
- **ULTRA Lightweight:** Completely new design for superior weight reduction
- **CO Sensor With Auto Shutdown:** Monitors and reacts to carbon monoxide (CO) levels



 **DIGITAL INVERTER TECHNOLOGY**

 **ULTRA - LIGHTWEIGHT INVERTER GENERATOR**



GXS4301i


1.6-Gal Tank with
Up To 7.5 Hour Runtime (Gas)



Integrated Top
Handle



Low
Idle



Quiet Tone
Muffler



Integrated
Outlet Covers



Total Harmonic
Distortion < 3% THD



149cc, OHV,
4 Cycle Engine




ULTRA - LIGHTWEIGHT INVERTER GENERATOR


GXS4301i

Data Center Displays;
Voltage, Frequency, Hours,
Power, Fuel Bar, Output
Ready/Overload/Low Oil Indicators
Low Idle and Reset Buttons

CO Sensor:
Auto Shutdown




Parallel
Capability*



AC Outlet: 5-20R
Duplex 20A, 120V



Recoil
Start

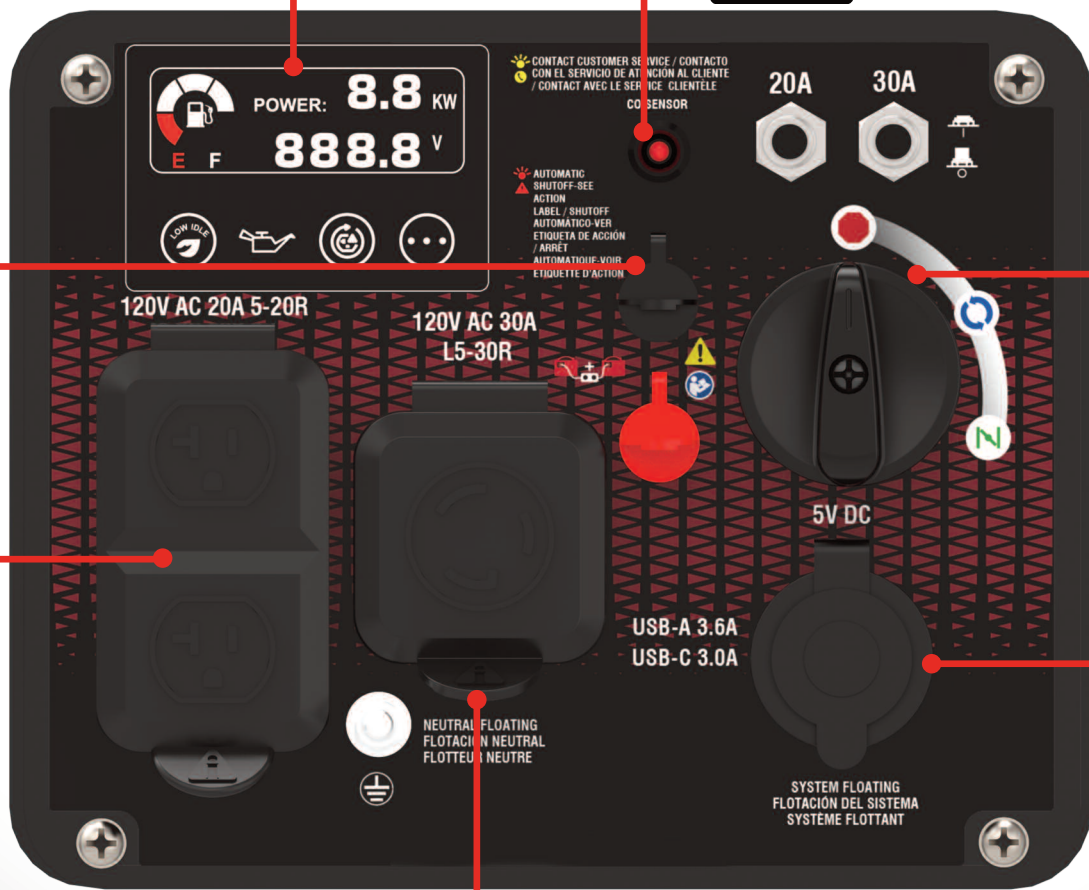


EZ Start
System



DC Outlet (2):
USB-A 3.6A, USB-C 3.0A



L5-30R
30A, 120VAC



*Requires PK6000 Parallel Kit Sold Separately

GXS4301i - INVERTER GENERATOR

Starting/Running Watts (Gas)	4300 /3450W
Certifications	EPA - CARB - PGMA Compliant
CO Monitor	Yes
AC Voltage	120V
Rated Speed/Frequency	3400-4400rpm / 60Hz
THD (Total Harmonic Distortion)	<3% - Perfect For Sensitive Electronics
Grounding System	Neutral Floating
Noise Level (dB)	As Low As 62
Engine Type	Single Cylinder 149cc - 4 Stroke OHV
Starting System	Recoil Start
Low Oil Shutdown	Yes
Parallel Capable	Yes - Requires PK6000 Parallel Kit Sold Separately
Cast Iron Sleeve	Yes
Fuel Type	Gasoline
Oil Type and Capacity	SAE 10W-30 - .51 Qt / .48 L / 16.2 Oz
Alternator Type	Digital Permanent Magnet
Tank (Gas)	1.6 Gal
Runtime @ 25% Load (Gas)	Up to 7.5 Hour
Low Idle Technology	Yes - Adjusts RPM Based On Demand
AC Outlets	2x5-20R Duplex (20A, 120V) / L5-30R (30A, 120V)
DC Outlets	2xUSB (5V, USB-A 3.6A - USB-C 3.0A)
Included	Oil, Funnel, Tool Kit, Manual, Quick Start Guide
Data Center	Voltage, Frequency, Hours, Power, Fuel Bar, Output Ready/Overload/Low Oil Indicators, Low Idle and Reset Buttons
Warranty (Residential)	3 Year
Unit LxWxH	19.7 x 12.2 x 17.7 in / 50.0 x 30.9 x 44.9 cm
Carton LxWxH	21.8 x 14.4 x 20.3 in / 55.4 x 36.6 x 51.6 cm
Unit Weight	51.1 lbs / 23.1 kg
Shipping Weight	62.4 lbs / 28.3 kg
UPC	850016881618

GXS4301i



FULL PARALLEL INTEGRATION*



DOUBLES YOUR POWER ONCE CONNECTED

Parallel cables included.
Read manual for full instructions.

NOTE: Maximum output is obtained from the L5-30 twist lock receptacle

*Requires second GXS4301i Series inverter and PK6000 Parallel Kit - each sold separately.

PK6000 Parallel Kit Required - Sold Separately



www.a-ipower.com
10887 Commerce Way, Unit A
Fontana CA 92337- 8240



Phone: 855-888-3598
Fax: 909-930-3719
support@a-ipower.com
Mon-Fri 8:00 AM to 4:30 PM PST

