

# POWER


## GXS4300i 4300 Watt Inverter Generator

- **Powered By:** 149cc OHV high performance 4 cycle engine
- **High Output:** 4,300 starting watts - 3,450 running watts on gasoline
- **Pure Power:** <3% THD of clean power output, sensitive electronics safe
- **Low Idle Technology:** Adjusts RPM based on demand, saving fuel
- **Mobility Kit:** Factory installed telescopic handle and wheels - no assembly required
- **LED Equipped:** Built in LED  control panel light
- **Quiet Operation:** Ultra Quiet - ideal for home, camping, tailgating & RV
- **Compact Design:** Lightweight and easy to transport with integrated handle
- **Digital Data Center:** Provides voltage, frequency, hours, power & fuel levels, output/overload/oil level status along with fuel saving low idle and reset functions
- **ULTRA Lightweight:** Completely new design for superior weight reduction
- **CO Sensor With Auto Shutdown:** Monitors and reacts to carbon monoxide (CO) levels



 DIGITAL INVERTER TECHNOLOGY

 ULTRA - LIGHTWEIGHT INVERTER GENERATOR



# GXS4300i


1.6-Gal Tank with  
Up To 7.5 Hour Runtime (Gas)



Integrated Top  
Handle



Low  
Idle



Quiet Tone  
Muffler




Integrated  
Outlet Covers



149cc, OHV,  
4 Cycle Engine



Total Harmonic  
Distortion < 3% THD



Telescopic  
Handle



Flat  
Free Wheel



  
ULTRA - LIGHTWEIGHT INVERTER GENERATOR


# GXS4300i

Data Center Displays;  
Voltage, Frequency, Hours,  
Power, Fuel Bar, Output  
Ready/Overload/Low Oil Indicators  
Low Idle and Reset Buttons

CO Sensor:  
Auto Shutdown




Parallel  
Capability\*



AC Outlet: 5-20R  
Duplex 20A, 120V



Recoil  
Start

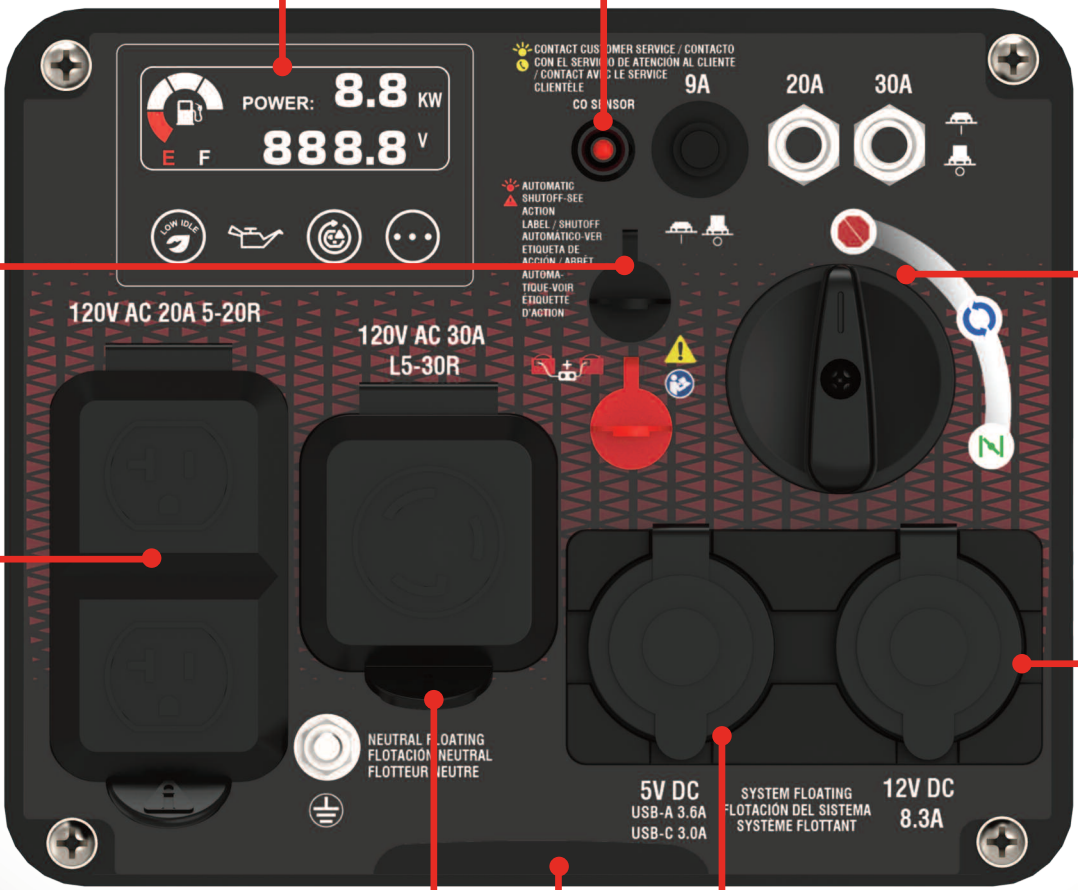

EZ Start  
System



DC Outlet:  
8.3A, 12VDC Automotive Outlet



L5-30R  
30A, 120VAC



DC Outlet (2):  
USB-A 3.6A  
USB-C 3.0A



Integrated LED  
Illumination



\*Requires PK6000 Parallel Kit Sold Separately

## GXS4300i

Starting/Running Watts (Gas)	4300/3450W
Starting/Running Watts (Propane)	NA
Starting/Running Watts (NG)	NA
Certifications	EPA
CO Monitor	Yes
AC Voltage	120V
Rated Speed/Frequency	3400-4400rpm/60Hz
Total Harmonic Distortion (THD)	<3% - Designed For Sensitive Electronics
Grounding System	Neutral Floating
Noise Level (dB)	As Low As 52
Engine Type	Single Cylinder 149cc - 4 Stroke OHV
Starting System	Recoil Start
Low Oil Shutdown	Yes
Parallel Capable	Yes - Requires PK6000 Parallel Kit Sold Separately
Fuel Type	Gasoline
Oil Type and Capacity	10W-30 - .51 Qt / .48 L / 16.2 Oz
Alternator Type	Digital Permanent Magnet
Tank (Gas)	1.6 Gal
Runtime @25% Load (Gas)	Up to 7.5 Hour
Mobility Kit	Yes - Built-In & Telescopic
Wheel	Yes - Factory Assembled
AC Outlets	2x5-20R Duplex (20A, 120V)/L5-30R (30A, 120V)
DC Outlets	2xUSB (5V, USB-A 3.6A - USB-C 3.0A), 12V 8.3A Auto Style Outlet
Integrated LED Illumination	Yes
Data Center	Voltage, Frequency, Hours, Power, Fuel Bar, Output Ready/Overload/Low Oil Indicators, Low Idle and Reset Buttons
Included	Oil, Funnel, 30A RV Adaptor, 12V DC Charging Cables, Tool Kit, Manual, Quick Start Guide
Warranty (Residential)	3 Year
Carton LxWxH	21.8 x 14.4 x 20.3 in / 55.4 x 36.6 x 51.6 cm
Unit Weight	52.9 lbs / 23.9 kg
Shipping Weight	62.4 lbs / 28.3 kg
UPC	850016881601

# GXS4300i



Integrated  
LED Light



## FULL PARALLEL INTEGRATION\*

**DOUBLES YOUR POWER  
ONCE CONNECTED**

Parallel cables included.  
Read manual for full instructions.

**NOTE: Maximum output is obtained from the  
L5-30 twist lock receptacle**

*\*Requires second GXS4300i / GXS4300iD Series  
inverter and PK6000 Parallel Kit - each sold separately.*



PK6000 Parallel Kit Required - Sold Separately

# iPOWER

www.a-ipower.com  
10887 Commerce Way, Unit A  
Fontana CA 92337- 8240

Phone: 855-888-3598  
Fax: 909-930-3719  
support@a-ipower.com  
Mon-Fri 7:30 AM to 5:30 PM CT

