



# 45 GALLON 3-NOZZLE UTV SPRAYER



### BEST IN CLASS PUMP

- 2.4 GPM High Performance 12 Volt Pump
- Maximum Pressure Of 60 PSI
- Pressure Switch Turns Pump On & Off
- Self Priming - Can Run Dry Without Damage
- Fuse Protected
- Chemical Resistant Components
- Fan Cooled To Promote Longevity & Efficiency

**HIGHFLO**  
HIGH PERFORMANCE

### LEVER GRIP SPRAY WAND



- Up To 30 Feet Horizontal Spray
- Up To 16 Feet Vertical Spray
- Adjustable Spray Pattern



### 15 FEET OF 3/8 INCH HOSE

- Chemical Resistant Rubber Hose
- Remains Flexible
- Less Prone To Kinking



### FUSE PROTECTED 8 FT LEAD WIRE

- Helps Protect Your Vehicle Wiring
- Alligator Clips & On/Off Switch Included



### PREMIUM SPRAY TIPS

- TeeJet AIXR11002 Air Induction XR Flat Spray Tips
- Reduces Chemical Drift
- Includes Check Valve Strainer



### MANIFOLD W/PRESSURE GAUGE

- Lever Ball Valves Allow Flow & Pressure Control
- Easily Monitor Pressure With Highly Visible Gauge
- Quick Connect Fittings Enables Fast Configuration



### 3-NOZZLE FOLDING STEEL BOOM


- Delivers 7.5 Feet of Spray Coverage
- 30 Inch Nozzle Spacing
- 62" Folding Steel Boom
- Boom Mounts To Standard 2" Receiver



**45-3N-UTV-GS**



THIS SPRAYER CAN BE USED WITH:

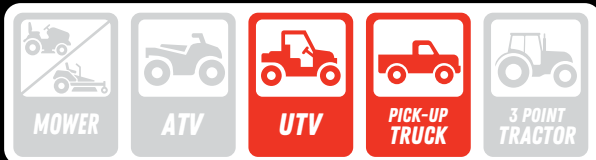

Sprayer Model	Sprayer Weight	Water Weight	Sprayer W/Water
45-3N-UTV-GS	45 lbs	375 lbs	420 lbs

Model #	Code #	Tank Size	Shipping Weight	Carton Size	Shipping Class	Cubic Feet	Ship Via	UPC Code
45-3N-UTV-GS	5303650	45 Gallon	45#	37.5 X 23.25 X 21.5	150	10.8	GROUND	733029124791

FOR DETAILED SPECS FIND ALL PRODUCT MANUALS AND PARTS BREAKDOWNS AT [FIMCOINDUSTRIES.COM/MANUALS](http://FIMCOINDUSTRIES.COM/MANUALS)