



65 GALLON 5-NOZZLE UTV SPRAYER



HIGHFLO
HIGH PERFORMANCE

BEST IN CLASS PUMP

- 2.4 GPM High Performance 12 Volt Pump
- Maximum Pressure Of 60 PSI
- Pressure Switch Turns Pump On & Off
- Self Priming - Can Run Dry Without Damage
- Fuse Protected
- Chemical Resistant Components
- Fan Cooled To Promote Longevity & Efficiency



FUSE PROTECTED 8 FT LEAD WIRE

- Helps Protect Your Vehicle Wiring
- Alligator Clips & On/Off Switch Included



MANIFOLD W/PRESSURE GAUGE

- Lever Ball Valves Allow Flow & Pressure Control
- Easily Monitor Pressure With Highly Visible Gauge
- Quick Connect Fittings Enables Fast Configuration



LEVER GRIP SPRAY WAND

- Up To 30 Feet Horizontal Spray
- Up To 20 Feet Vertical Spray
- Adjustable Spray Pattern



15 FEET OF 3/8 INCH HOSE

- Chemical Resistant Rubber Hose
- Remains Flexible
- Less Prone To Kinking



PREMIUM SPRAY TIPS

- TeeJet AIXR11002 Air Induction XR Flat Spray Tips
- Reduces Chemical Drift
- Includes Check Valve Strainer




5-NOZZLE FOLDING STEEL BOOM

- Delivers 12.5 Feet of Spray Coverage
- 30 Inch Nozzle Spacing
- 122" Folding Steel Boom
- Boom Mounts To Standard 2" Receiver



65-5N-UTV-GS

THIS SPRAYER CAN BE USED WITH:

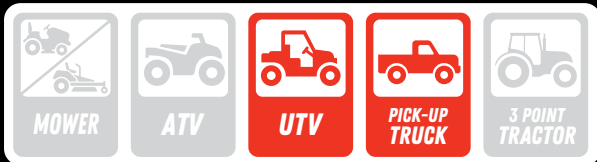

Sprayer Model	Sprayer Weight	Water Weight	Sprayer W/Water
65-5N-UTV-GS	56 lbs	542 lbs	598 lbs

Model #	Code #	Tank Size	Shipping Weight	Carton Size	Shipping Class	Cubic Feet	Ship Via	UPC Code
65-5N-UTV-GS	5303651	65 Gallon	56#	44.25 X 25.25 X 23.5	150	15.2	GROUND	733029124807

FOR DETAILED SPECS FIND ALL PRODUCT MANUALS AND PARTS BREAKDOWNS AT FIMCOINDUSTRIES.COM/MANUALS