
JOBSMART®

10 GAL WET/DRY VAC



Product Model # 2591471

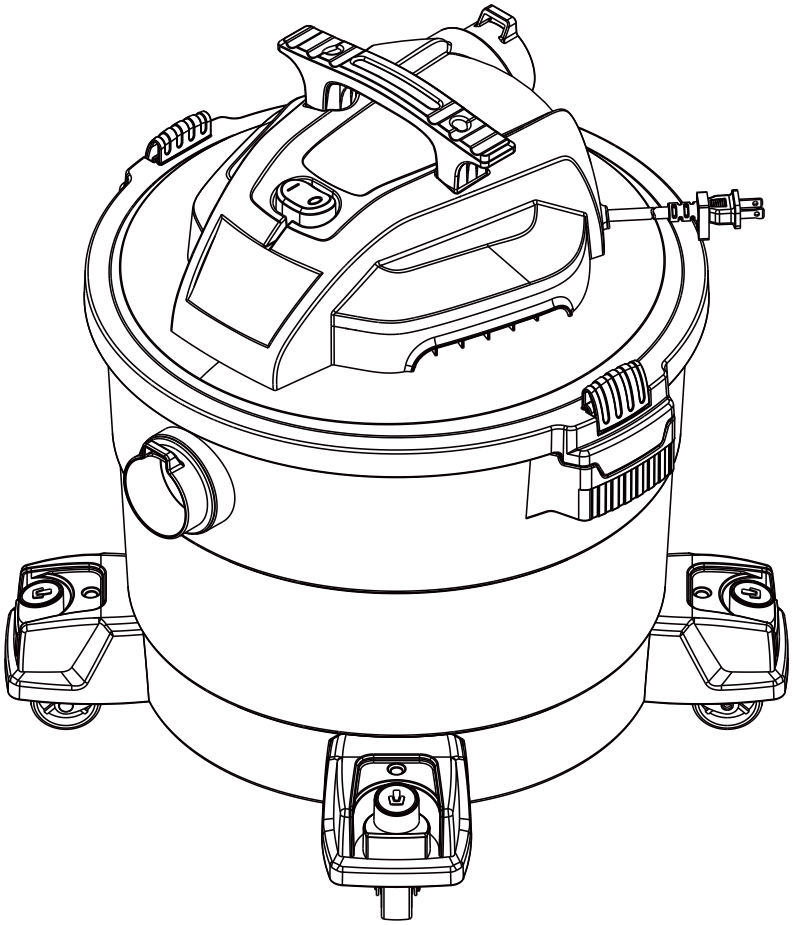

Read and understand this operator's manual thoroughly before using the product. It contains important information for your safety as well as operating and maintenance advice.

DISTRIBUTED BY: Tractor Supply Company, 5401 Virginia Way, Brentwood, TN 37027.

Table of Contents

SAFETY GUIDELINES..... 1

1.Important safety instructions.....2

2.Save these instructions..... 2

OPERATING INSTRUCTIONS..... 4

1.Unpacking & set-up summary.....4

2.DRY PICK-UP..... 4

3.WET PICK-UP.....5

4.EMPTING THE TANK..... 5

5.BLOWING OPERATION.....5

CARE AND MAINTENANCE.....6

CLEANING..... 6

STORGE..... 6

TROUBLESHOOTING.....7

PRODUCT SPECIFICATIONS.....7

EXPLODED VIEW / PARTS LIST..... 8



SAVE THESE INSTRUCTIONS

This manual contains important safety and operating instructions.
Read all instructions and follow them with use of this product.

SAFETY GUIDELINES

Important Safety Information

The manufacturer cannot possibly anticipate every possible circumstance that might involve a hazard. The warnings in this manual, and the tags and decals affixed to the unit are, therefore, not all-inclusive. If you use a procedure, work method, or operating technique that the manufacturer does not specifically recommend, you must satisfy yourself that it is safe for you and others. You must also make sure that the procedure, work method, or operating technique that you choose does not render the compressor unsafe.

Definitions: Safety Alert Symbols and Words


This instruction manual uses the following safety alert symbols and words to alert you to hazardous situations and your risk of personal injury or property damage.

⚠ **DANGER:** indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.


⚠ **WARNING:** indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.

⚠ **CAUTION:** Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.

NOTICE: Indicates a practice not related to personal injury which, if not avoided, may result in property damage.

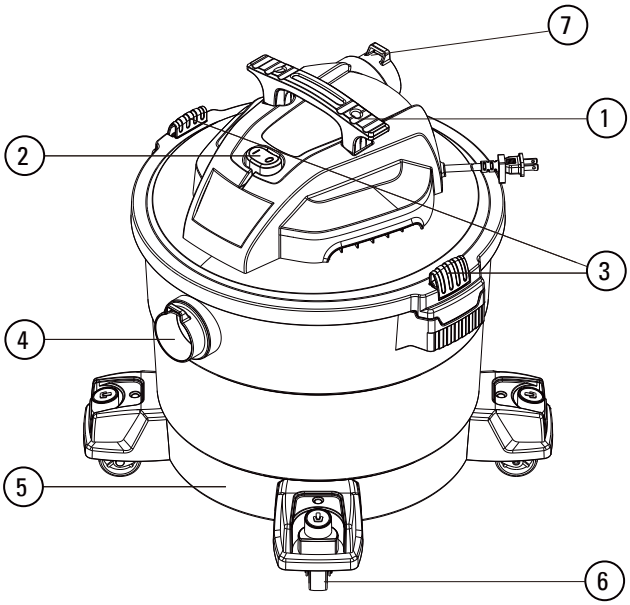

Include:

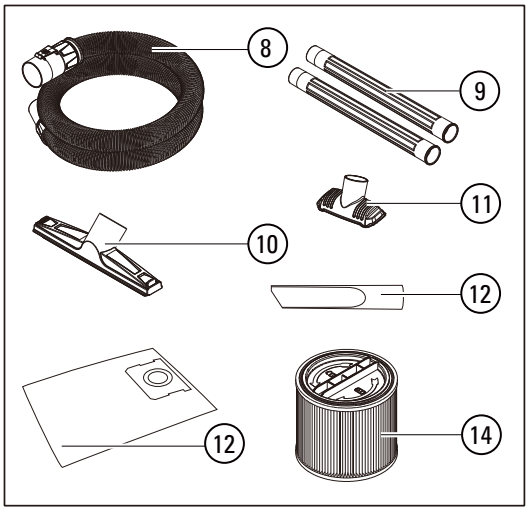

1.	HANDLE	8.	FLEXIBLE HOSE
2.	POWER SWITCH	9.	2 EXTENSION WANDS
3.	2 LID LATCHES	10.	FLOOR NOZZLE
4.	VACUUM PORT	11.	UTILITY NOZZLE
5.	DUST TANK	12.	CREVICE NOZZLE
6.	4 CASTERS	13.	DISPOSABLE DUST BAG
7.	BLOWER PORT	14.	CARTRIDGE FILTER

IMPORTANT SAFETY INSTRUCTIONS

READ ALL INSTRUCTIONS BEFORE USING THIS APPLIANCE

When using this appliance, basic safety precautions should always be followed including the following:

⚠ **WARING:** To reduce the risk of fire, electric shock and injury:

- Do not leave appliance when plugged in or when in operation. Unplug from outlet when not in use and before performing any service on it.
- Do not expose to rain. Store indoors.
- Always disconnect the plug from the wall outlet before removing the tank cover.
- Do not allow to be used as a toy. Close attention is necessary when used by or near children.
- Do not use with damaged cord or plug. If appliance is not working as it should, has been dropped, damaged, left outdoors or dropped into water, contact service center for assistance.
- Do not pull or carry by cord, use cord as a handle, close a door on cord or pull cord around sharp edges or corners. Do not run appliance over cord. Keep cord away from heated surfaces.
- Do not unplug by pulling on cord. To unplug, grasp the plug, not the cord.
- Do not handle plug or appliance with wet hands.
- Do not put any object into openings. Do not use with any openings blocked; keep the openings free of dust, lint, hair and anything that may reduce airflow.
- Keep hair, loose clothing, fingers and all parts of body away from openings and moving parts.
- Do not pick up anything that is burning or smoking, such as cigarettes, matches or hot ashes.
- Do not use without dust bag and/or filters in place.
- Turn off all controls before unplugging.
- Use extra care when cleaning on stairs.
- Do not use to pick up flammable or combustible liquids such as gasoline or use in areas where they may be present.
- Do not use the cleaner as a sprayer of flammable liquids such as oil-based paint, lacquers, etc.
- Do not vacuum toxic, carcinogenic, combustible or other hazardous materials such as asbestos, arsenic, barium, beryllium, lead, pesticides or other health endangering materials.
- Do not pick up soot, cement, plaster or drywall dust without filter and dust bag in place. These are very fine particles that may affect the performance of the motor or be exhausted back into the air. Additional dust bag is available.
- Do not leave the cord lying on the floor once have finished the cleaning job. It can become a tripping hazard.
- Take special care when emptying heavily loaded tanks.
- To avoid spontaneous combustion, empty tank after each use.
- The operation of a utility vacuum can result in foreign objects being blown into eyes, which can result in eye damage. Always wear safety goggles when operating vacuum.
- STAY ALERT. Watch what you are doing and use common sense. Do not use vacuum cleaner when you are tired, distracted or under the influence of drugs, alcohol or medication causing diminished control.
- This appliance is provided with double insulation. Use only identical replacement parts. See instructions for servicing double insulated appliances.
- Unplug appliance before connecting the hose, nozzles, filters, or other accessories.

NOTICE: Use only as described in this manual. Use only manufacturer's recommended attachments.

SAVE THESE INSTRUCTIONS ADDITIONAL SAFETY RULES

⚠ **WARNING:**

- Do not pick up anything that is burning or smoking, such as cigarettes, matches, or hot ashes.
- Do not use to vacuum combustible explosive materials, such as coal, grain, or other finely divided combustible materials.
- Do not use to vacuum hazardous, toxic or carcinogenic materials, such as asbestos or pesticide.
- Never pick up explosive liquids (e.g. gasoline, diesel fuel, heating oil, paint thinner, etc.), acids or solvents.
- Do not use vacuum without filters in place.
- Some wood contains preservatives which can be toxic. Take extra care to prevent inhalation and skin contact when working with these materials. Request and follow any safety information available from the material supplier.

- Do not use vacuum as a step ladder.
- Do not place heavy objects on vacuum.
- An extension cord must have adequate wire size (AWG or American Wire Gauge) for safety. The smaller the gauge number of the wire, the greater the capacity of the cable, that is 16 gauge has more capacity than 18 gauge. An undersized cord will cause a drop in line voltage resulting in loss of power and overheating. When using more than one extension to make up the total length, be sure each individual extension cord contains at least the minimum wire size. The following table shows the correct size to use. If in doubt, use the next heavier gauge. The smaller the gauge number, the heavier the cord.
- If an extension cord is to be used outdoors it must be marked with the suffix W-A or W following the cord type designation. For example – SJTW-A indicates it is acceptable for outdoor use.

Minimum Gauge for Cord Sets						
Ampere Rating		Volts	Total Length of Cord in Fee(meter)			
		120V	25 (7.6)	50 (15.2)	100 (30.5)	150 (45.7)
		240V	50 (15.2)	100 (30.5)	200 (61.0)	300 (91.4)
More Than	Not More Than	AWG				
0	6		18	16	16	14
6	10		18	16	14	12
10	12		16	16	14	12
12	16		14	12	Not Recommended	

⚠**WARNING:** Always wear proper personal hearing protection that conforms to ANSI S12.6 (S3.19) during use. Under someconditions and duration of use, noise from this product may contribute to hearing loss.

⚠**WARNING:** Always use safety goggles. Everyday eyeglasses are NOT safety goggles. Also use face or dust mask if area of operation is dusty. ALWAYS WEAR CERTIFIED SAFETY EQUIPMENT:
- ANSI Z87.1 eye protection (CAN/ CSA Z94.3),
- ANSI S12.6 (S3.19) hearing protection,
- NIOSH/ OSHA/ MSHA respiratory protection.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.
FOR HOUSEHOLD USE ONLY.

DOUBLE INSULATION

Double insulated appliances are constructed throughout with two separate layers of electrical insulation or one single layer of reinforced insulation between the user and the appliance's electrical system. Products built with this insulation system are not intended to be grounded. As a result, this appliance is equipped with a two-prong plug which permits it to be used without concern for maintaining a ground connection.

NOTICE: Double insulation does not take the place of normal safety precautions when operating this appliance. The secondary insulation system is for protection against injury resulting from a possible failure of the primary insulation within the product.

⚠**CAUTION:** WHEN SERVICING USE ONLY IDENTICAL REPLACEMENT PARTS. Repair or replace damaged cords.

POLARIZED PLUGS

Polarized plugs (one blade is wider than the other) are used on equipment to reduce the risk of electric shock. When provided, this plug will fit in the polarized outlet only one way.

⚠**WARNING:** Do not alter the plug in any way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician to install the proper outlet.

⚠**WARNING:** If the supply cord is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard. Remove the plug from the socket before performing maintenance. Before using the machine make sure that the frequency and voltage shown on the rating plate correspond with the mains voltage. Specifications and details are subject to change without prior notice. The accessories shown in the pictures may vary from model to model.

IMPORTANT PROPER DISPOSAL

The symbol on the product or packaging indicates that the product must not be treated as domestic refuse. Instead, it should be handed in to a collection point for the recycling of electrical and electronic components. By ensuring the product is treated in the right way, this will help to prevent the negative impact on environment and health that may result from the product being thrown away as general waste. For further information about recycling, you should contact the local authorities, refuse collection service or the sales outlet where you bought the goods.




⚠**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.


⚠**WARNING:** This product is NOT to be used for filtering of pathogens, for example COVID-19. Follow all local, state and federal guidance on general cleaning practices.

OPERATING INSTRUCTIONS

UNPACKING & SET-UP SUMMARY

1. Pull lid latches (3) in an outward motion, remove power head and some accessories that may have been shipped in the tank.
2. Attach casters (6) following the instructions as below:
   a. Invert dust tank. Align and slide casters (6) into depressions in tank bottom and secure with screws provided.
   b. Return dust tank assembly upright.
3. Before replacing power head, refer to this manual to ensure you have the proper filters installed for the cleaning operation.
4. Replace power head, and apply pressure with thumb to each latch (3) until it snaps tightly in place. Make sure all lid latches (3) are clamped securely.
5. Insert the hose (8) end into vacuum port (4) of tank.
6. Attach the extension wands to the end of the hose. Apply slight pressure until fitting is tight.
7. Attach one of the cleaning accessories (depending on the cleaning requirements) on the extension wands (9). Twist slightly to tighten the connection.
8. Plug the cord into the wall outlet. The vacuum is ready for use.
9. Turn the unit “ON” by pressing the switch (2) from position “O” to position “I”. The “O” is the “OFF” position and the “I” is the “ON” position.

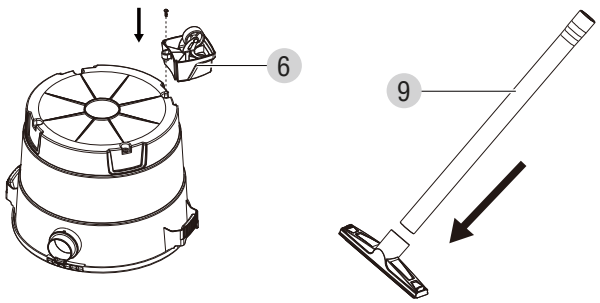




⚠**WARNING:** To reduce the risk of fire or explosion, do not operate this vacuum in areas with flammable gases, vapors or explosive dust in the air. Flammable gases or vapors include but are not limited to: lighter fluid, solvent-type cleaners, oil-based paints, gasoline, alcohol or aerosol sprays. Explosive dusts include but are not limited to: coal, magnesium, aluminum, and grain or gun powder. Do not vacuum explosive dust, flammable or combustible liquids or hot ashes. Do not use this vacuum as a sprayer for any flammable or combustible liquid. To reduce the risk of health hazards from vapors or dusts, do not vacuum toxic materials.

⚠**WARNING:** The operation of any utility vacuum can result in foreign objects being blown into the eyes, which can result in severe eye damage. Always wear safety eyewear complying with ANSI Z87.1 (or in Canada, CSA Z94.3) before starting operation.

⚠**CAUTION:** To reduce risk of hearing damage, wear ear protectors when using the vacuum for extended hours or when using it in a noisy area.

DRY PICK-UP


1. The filter must always be in correct position to reduce the risk of leaks and possible damage to vac. Make sure that the filter is completely covering the cartridge filter (14) . Make sure there are no gaps between the cartridge filter (14) and the lid. (See illustration). It is very important to assemble the filter to the cage without allowing any possible leaks or tears. Any leaks will allow the picked up debris to be blown out of the blowing port and back into the surrounding environment.
2. When using the vacuum to pick up fine dust, it will be necessary to empty the dust tank and clean or replace the cartridge filter (14) at more frequent intervals to maintain peak vacuum performance.



NOTICE: A dry cartridge filter is necessary to pick up dry material. If you use the vacuum to pick up dust when the cartridge filter is wet, the cartridge filter will clog quickly and be very difficult to clean. If the cartridge filter gets wet, replace it before continuing to do dry pickups.

INSTALLING DISPOSABLE FILTER BAG


1. Slide the cardboard collar opening firmly onto the vacuum port deflector until it stops against the deflector wall.
2. Position the disposable dust bag 13 so that it is distributed around the inside of the tank.
3. Replace and secure the power head onto the tank.



WET PICK-UP

1 . The cartridge filter 14 must be positioned over the filter cage while vacuuming liquids. When picking up several tanks full of liquid, the cartridge filter 14 will become saturated and misting may appear in the exhaust air. At this time, you should dry or replace the cartridge filter to eliminate the misting and possible dripping of liquid around the lid. After completing a wet pick-up job, raise the hose to drain any excess liquid into the tank before shutting off. The interior of tank should be periodically cleaned.

2 . This wet/dry vac is equipped with a float mechanism which will rise automatically to cut off the airflow when the liquid in the tank reaches a predetermined level. When this happens, turn off vac, unplug the power cord, and empty the dust tank. You will know that the float has shut the airflow off because the suction ceases and the motor noise becomes higher in pitch due to increased motor speed. The liquid capacity may vary with the rate of pickup.




NOTICE: To reduce the risk of damage to the vacuum, do not run motor with float in raised position.

EMPTING THE TANK

⚠ **WARNING:** To reduce the risk of injury from accidental starting, unplug power cord before emptying the dust tank.

1 . Remove the power head assembly of the wet/dry vacuum by pulling outward on the lid clips 3 located on each side of the vacuum. Lift off the power head assembly.

2 . Dump the dust tank 5 contents into the proper waste disposal container.

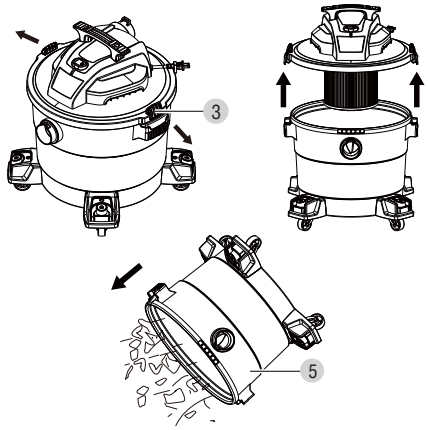

BLOWING OPERATION

⚠ **WARNING:** Always wear safety eyewear complying with ANSI Z87.1 (or in Canada CSA Z94.3) when using as a blower.


⚠ **WARNING:** To avoid injury to bystanders, keep them clear of blowing debris.

⚠ **CAUTION:** Wear a dust mask if blowing creates dust which might be inhaled.

⚠ **CAUTION:** To reduce the risk of hearing damage, wear ear protection when using the vacuum/blower for extended hours or in confined space.

The vacuum contains a blowing feature. Follow the steps below to use the vacuum as a blower.

1 . Locate blower port 7 on the vacuum.
2 . Insert the buckle end of the 6 ft. x 1-7/8 in. hose 8 into the blower port.
3 . Turn the vacuum "ON".



CARE AND MAINTENANCE

FILTER REPLACEMENT

⚠ **WARNING:** To reduce the risk of injury from accidental starting, unplug power cord before changing or cleaning filter. The filter should be cleaned often to maintain peak Vacuum performance.

⚠ **WARNING:** Do not remove filter cage and float. The float prevents water from entering the impeller and damaging the motor. The cage prevents fingers from touching the moving impeller.

⚠ **CAUTION:** To avoid damage to the impeller and motor, always reinstall the reusable filter before using the vacuum for dry pickups and always reinstall the foam filter before using the vacuum for wet pickups.

⚠ **CAUTION:** After cleaning, check the filter for tears or small holes. Do not use a filter with holes or tears in it. Even a small hole can cause dust to come out of the vacuum. Replace it immediately.

⚠ **CAUTION:** Clean the filter in an open area.

CLEANING

To keep the wet/dry vacuum looking its best, clean the outside with a cloth dampened with warm water and mild soap.

To clean the tank:

1 . Dump out debris.
2 . Wash tank thoroughly with warm water and mild soap.
3 . Wipe with dry cloth.

STORAGE

Before storing the vacuum, the dust tank should be emptied and cleaned. The cord should be wrapped and hung on the unit and the accessories should be kept in the accessory holder so they can be readily available. The vacuum should be stored indoors.


Troubleshooting

PROBLEM	POSSIBLE CAUSE	SOULTION
Vacuum does not run	No electricity	Make sure electrical outlet has voltage (A qualified electrician may need to be contacted)
Loss of suction, wet pick-up	1) Full tank 2) Clogged hose 3) Clogged filter	1) Drain and clean tank 2) Remove hose and clean debris 3) Clean or replace filter
Loss of suction, dry pick-up	1) Full tank 2) Clogged hose 3) Clogged filter	1) Drain and clean tank 2) Remove hose and clean debris 3) Clean or replace filter

Product Specifications

Model No.	2591471
Power	120V~/60HZ/8A
Peak HP	4.0 HP
Tank Capacity	10 Gallon
Hose	1-7/8in. x 6 ft.
Power cord	SJTW18AWG / 16 ft. Length

EXPLODED VIEW / PARTS LIST

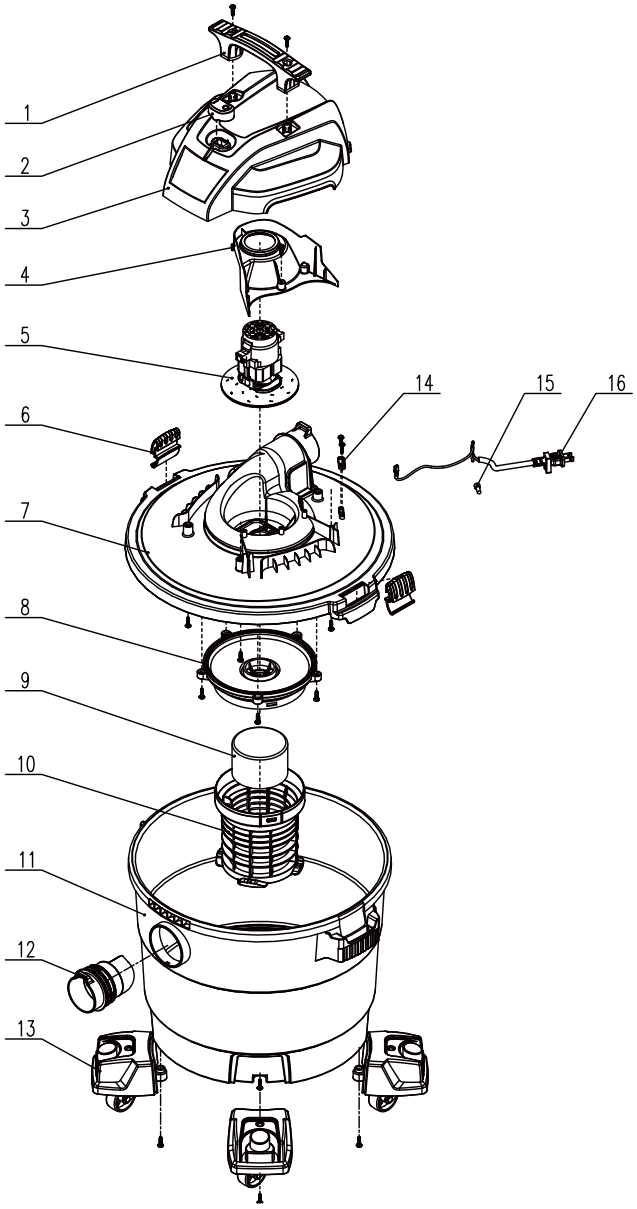

PART	DDESCRIPTION	QTY
1	Handle	1
2	Power switch	1
3	Top cover	1
4	Thermal baffle	1
5	Motor	1
6	Lid latch	2
7	Middle frame	1
8	Motor bottom support	1

PART	DDESCRIPTION	QTY
9	Float	1
10	Float holder	1
11	Dust tank	1
12	Vacuum port	1
13	Caster	4
14	Line pressing board	1
15	Pressure seal cap	1
16	Power cord	1