




# Repair your Frost-Proof Yard Hydrant without digging it up.

**⚠ WARNING: CHOOSE THE CORRECT REPAIR KIT AS PER THE COLOR OF YOUR HYDRANT**

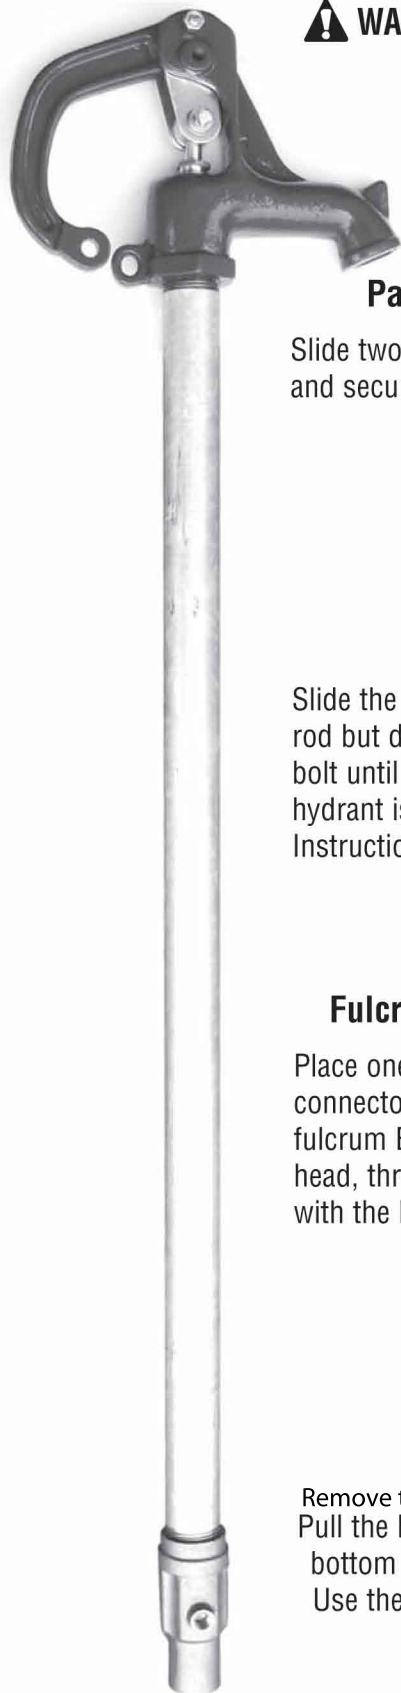

## Packing Nut & O-Rings

Slide two o-rings over the clevis rod and secure with the Packing nut.


Packing Nut & O-Rings



## Connector

Slide the connector over the clevis rod but do not tighten the locking bolt until handle is secured and hydrant is adjusted. (See installation Instructions).

Connector

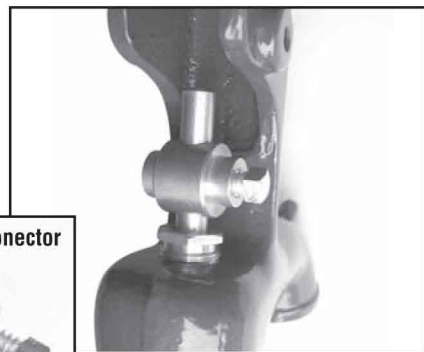


## Fulcrum Bolt, Nut & Linkage

Place one link on each side of both the connector and the handle. Insert the fulcrum Bolt through the hole in the head, through the handle and secure with the locking nut.

Fulcrum Bolt and Nut




Links

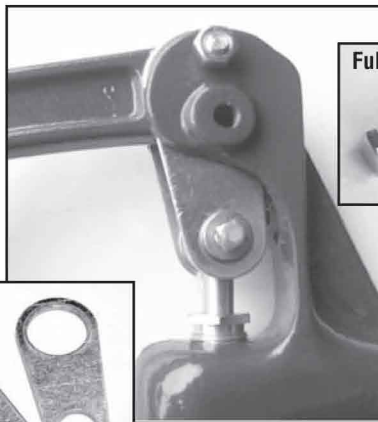

## Plunger

Remove the yard hydrant head.  
Pull the hydrant rod to replace the plunger at the bottom of the rod. Two plungers are included.  
Use the one that looks like the plunger in your yard hydrant.

Plungers

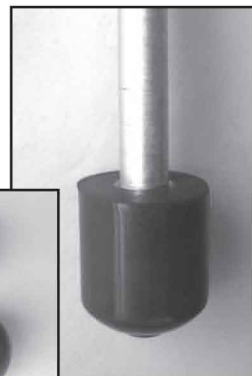

For questions regarding replacements, please call **1-800-346-7611**