

SIPHON FEED ABRASIVE BLASTER

OPERATOR'S MANUAL

STORE THIS MANUAL IN A SAFE
PLACE FOR FUTURE REFERENCE

SATISFACTION GUARANTEED

Satisfaction is guaranteed. If for any reason you are not completely satisfied with your purchase, please return it to any Tractor Supply Co.® store.



WARNING: BEFORE USE, READ AND UNDERSTAND OPERATOR'S MANUAL. Improper operation or maintenance of this product could result in serious injury and property damage. Read and understand all warnings and operation instructions before using this equipment. When using air tools, basic safety precautions should always be followed to reduce the risk of personal injury.

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and Di(2-ethylhexyl)phthalate (DEHP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

WARNING: Contains lead. May be harmful if eaten or chewed. May generate dust containing lead. Keep out of the reach of children.

SATISFACTION GUARANTEED

Satisfaction is guaranteed. If for any reason you are not completely satisfied with your purchase, please return it to any Tractor Supply Co.® store.


Distributed by:
TRACTOR SUPPLY COMPANY
5401 VIRGINIA WAY
BRENTWOOD, TN 37027
For customer support, call: 1-888-376-9601
www.TractorSupply.com


SIPHON FEED ABRASIVE BLASTER

To ensure the Blaster is assembled and used correctly, carefully follow all instructions.

1. Attach Quick Connect Coupler to Air Hose Adapter and tighten with wrench. NOTE: Use of sealant tape is recommended on the threads of Air Hose Adapter to prevent air leakage.
2. Ensure Rubber Hose is firmly attached to Abrasive Gun. Tighten with Hose Clamp. Ensure other end of Rubber Hose is inserted securely into Abrasive Media Storage.

WARNING: Use recommended blast material only.

3. Attach Air Hose to Quick Connect Coupler on Abrasive Gun.
4. Set air pressure between 80-100 PSI.
5. Point Abrasive Gun in a safe direction-away from people, pets or anything around you that may be damaged by direct or indirect abrasive spray.
6. Pull Trigger to begin abrasive blasting.
7. Release Trigger to stop.
8. When finished abrasive blasting, disconnect Air Supply from Abrasive Gun.

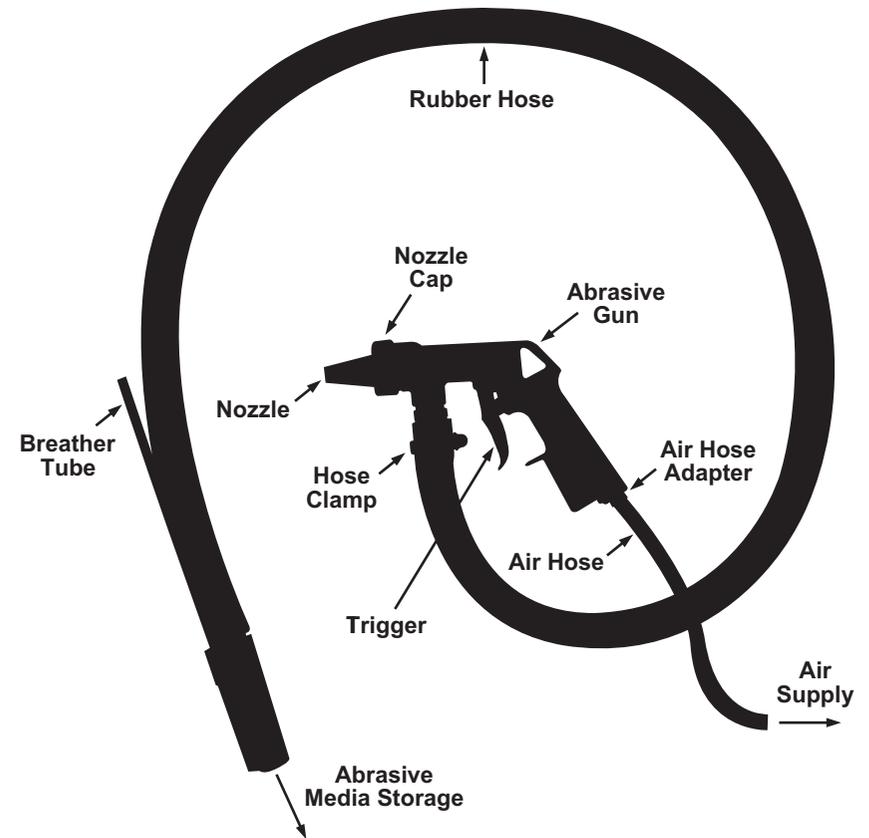

NOTE: Nozzle may become worn with time and need to be replaced. To replace, twist off Nozzle Cap and remove Nozzle. Attach new Nozzle and secure by twisting Nozzle Cap until securely tightened.

Recommended Abrasive Media size: 120#; 150#; 180#; 220#