

HAND HELD ABRASIVE BLASTER

OPERATOR'S MANUAL

STORE THIS MANUAL IN A SAFE
PLACE FOR FUTURE REFERENCE

SATISFACTION GUARANTEED

Satisfaction is guaranteed. If for any reason you are not completely satisfied with your purchase, please return it to any Tractor Supply Co.® store.



SATISFACTION GUARANTEED

Satisfaction is guaranteed. If for any reason you are not completely satisfied with your purchase, please return it to any Tractor Supply Co.® store.

   
Distributed by:
TRACTOR SUPPLY COMPANY
5401 VIRGINIA WAY
BRENTWOOD, TN 37027
For customer support, call: 1-888-376-9601
www.TractorSupply.com



WARNING: BEFORE USE, READ AND UNDERSTAND OPERATOR'S MANUAL. Improper operation or maintenance of this product could result in serious injury and property damage. Read and understand all warnings and operation instructions before using this equipment. When using air tools, basic safety precautions should always be followed to reduce the risk of personal injury.

WARNING: This product can expose you to chemicals including lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

WARNING: Contains lead. May be harmful if eaten or chewed. May generate dust containing lead. Keep out of the reach of children.


HAND HELD ABRASIVE BLASTER

Thank you for purchasing Hand Held Abrasive Blaster.
To make sure the Blaster is assembled and used correctly, carefully follow all instructions.

1. Attach Quick Connect Coupler to Air Hose Adapter and tighten with wrench. NOTE: Use of sealant tape is recommended on the threads of Air Hose Adapter to prevent air leakage.
2. Make sure Abrasive Media Canister is firmly attached to Abrasive Gun. Tighten with wrench if necessary.
3. Fill Canister with abrasive media. Leave the top inch empty to allow Canister Lid to attach properly.

WARNING: Do not use sand or silica based abrasives.

4. Twist lid to secure Abrasive Media Canister to Abrasive Gun.
5. Attach Air Hose to Quick Connect Coupler on Abrasive Gun.
6. Set air pressure between 80-100 PSI.
7. Point Abrasive Gun in a safe direction away from people, pets or anything around you that may be damaged by direct or indirect abrasive spray.
8. Pull trigger to begin abrasive blasting.
9. Release trigger to stop.
10. When finished abrasive blasting, disconnect air supply from Abrasive Gun.

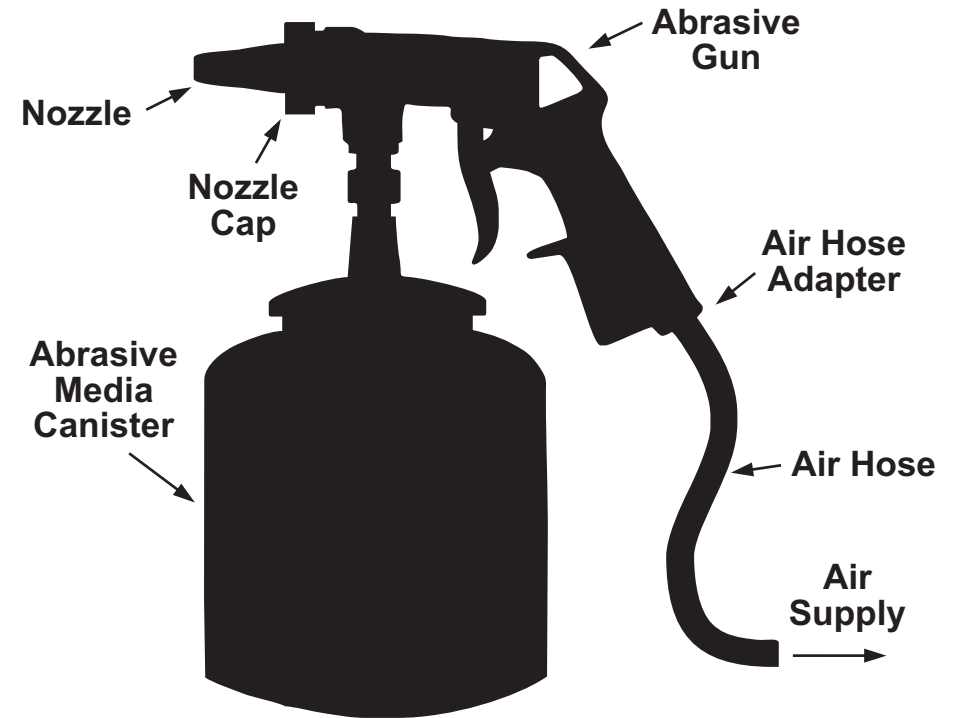

WARNING: Never open Abrasive Media Canister when air compressor is attached.

Note: Nozzle will become worn with time and will need to be replaced. To replace, twist off Nozzle Cap and remove Nozzle. Attach new Nozzle and secure by twisting Nozzle Cap until tight.