

24-HOUR MECHANICAL TIME SWITCH UNIVERSAL MULTI-VOLTAGE

40
AMP



120/208-277 VAC
SPST/DPST 60HZ

609/609P

- UP TO 16 ON / OFF SETTINGS PER DAY
- SWING-DOWN SNAP-LOCK WIRING COMPARTMENT COVER WITH EXTRA TRIPPER STORAGE
- REVERSIBLE DOOR FOR TIGHT SPACE MOUNTING
- SNAP-IN MECHANISM
- FULLY ENCLOSED TIMING MOTOR FOR LONGER LIFE
- SINGLE CYCLE OVERRIDE LEVER


NEMA 1 **NEMA 3R**
Rated Rated

"POP-FAST" KNOCKOUTS

NO-TOOLS REQUIRED WITH REUSABLE KNOCKOUTS
FOR EASY INSTALLATION



ONLY ON 600P CABINET

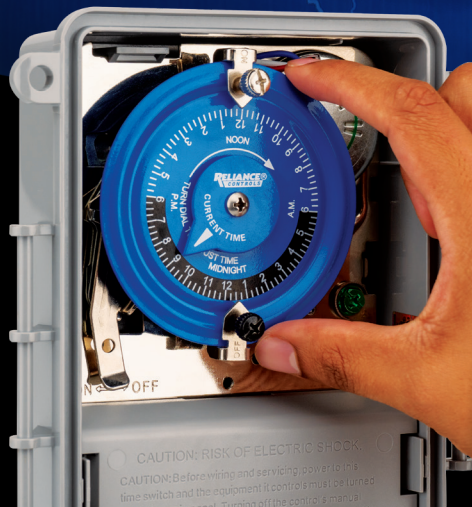

HIGH-VISIBILITY 3½" DIAL
LARGE HAND SET TRIPPERS FOR EASY TIME SETTING

MODEL NUMBER
609 INDOOR



NEMA 1
Rated

Replaces

T101 / T102 / T103 /
T104 / 1101B / 1102B /
1103B / 1104B / 1109A



**POWDER COATED
STEEL**

FEATURES

- Universal Multi-Voltage
- 4 Switches in one
- Designed to work with 120/208-277 VAC applications
- Multiple ratings accommodate many load requirements
- Up to 16 ON-OFF operations per day
- Large finger set trippers
- Reversible doors for tight mounting spaces
- 609P has patented swing down locking wire compartment door with 2 extra tripper mounts with Pop-Out knockout holes to greatly save on installation time

GREAT FOR CONTROLLING

Pumps and compressors
Pools and spas
Heating and air conditioning

Commercial lighting
and signs
Electric motors

FOR USE WITH THESE LIGHTING TYPES



MODEL NUMBER
609P INDOOR / OUTDOOR



NEMA 3R
Rated

Replaces

T101P / T102P / T103P /
T104P / 1101B-P / 1103B-P /
1104B-P / 1104B-P / 1109A-O



**HIGH IMPACT
POLYCARBONATE**

RATINGS

Switch	SPST or DPST
Timing Motor	120/208-277VAC 60 Hz, 4 Watts
Contact Voltage	120-240 VAC, 60Hz
Resistive, Inductive, Tungsten	40A, 40 FLA, 120, 208-240, 277 VAC
Electronic Ballast / LED	16A 120 VAC, 8A 240 VAC
Motor Load	2 HP 120 VAC, 5HP 240 VAC
Operating Temperature	-40°F to 130°F (-40°C to 54°C)
Pilot Duty	1000 VA, 120-240 VAC
Enclosure	600-Series NEMA 1 600P-Series NEMA 3R / Lockable Hasp
Enclosure Dimensions	600P-Series H. 8 3/4" x W. 6 1/4" x D. 3 1/8" 600-Series H. 7 7/8" x W. 4 1/2" x D. 2 3/4"
Knockouts	Combination 1/2" - 3/4" nominal, one on back and on each side and two on bottom (600P-series has reusable knockouts)
Wire Size	#8 - #14 AWG
Warranty	2 Years



INDUSTRIAL GRADE



WIRING DIAGRAMS

