



Truck Bed Extender

ITEM:10105004



MANUAL

WARNING

Read carefully and understand all ASSEMBLY AND OPERATION INSTRUCTIONS before operating. Failure to follow the safety rules and other basic safety precautions may result in serious personal injury.

Load Capacity	350 lbs.
Vehicle Hitch Receiver Size	2" (Vehicle hitch requires a Class III or Class IV tow rating.)
Hitch Pin Size	5/8" dia. (not include)

INTENDED USE

Ideal for short-bed trucks, SUVs, vans, rhino/gators, and all other vehicles capable of hauling a load.

We recommend using your new Truck Bed Extender for the following:

Lumber, Canoes, Extension ladders, oversized sheets of plywood and drywall Utilize it as an extended workspace/bench Throw a tailgate party.

Create additional space for your hunting gear and supplies.

The extender can be assembled two different ways, respectively with the long end or short the end of L-extension (2) connecting to the T-support (1).

SAVE THESE INSTRUCTIONS

WORK AREA

- Keep work area clean, free of clutter and well lit. Cluttered and dark work areas can cause accidents.

- Keep children and bystanders away while operating the car go cart. Distractions can cause you to lose control, so visitors should remain at a safe distance from the work area.
- Be aware of all power lines, electrical circuits, water pipes and other mechanical hazards in your work area, particularly those hazards below the work surface hidden from the operator's view that may be unintentionally contacted and may cause personal harm or property damage.
- Be alert of your surroundings. Using Truck Bed Extender in confined work areas may put you dangerously close to cutting tools and rotating parts.

PERSONAL SAFETY

- Stay alert, watch what you are doing and use common sense when using the Truck bed extender. Do not use the Truck bed extender while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating a Truck bed extender may result in serious personal injury.
- Dress properly. Do not wear loose clothing, dangling objects, or jewelry. Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewelry or long hair can be caught in moving parts.
- Use safety apparel and equipment. Use safety goggles or safety glasses with side shields which comply with current national standards, or when needed, a face shield. Use as dust mask in dusty work conditions. This applies to all persons in the work area. Also use non-skid safety shoes, hardhat, gloves, dust collection systems, and hearing protection when appropriate.
- Store idle the Truck bed extender. When the product is not in use, store it in a secure

place away from children. Inspect for good working condition prior to storage and re-use.

OPERATION SAFETY

Carrying any load can be hazardous. All loads must be tied down securely to the rack to prevent them from vibrating or sliding forward, backward, laterally or being blown off or broken by unexpected wind or road hazards such as potholes. Check each time you install the rack, load the rack, as well as daily to ensure that all connections are tight.

Periodically check welds for cracking caused by metal fatigue.

Avoid roll over by ensuring that loads are not top-heavy. High loads must be transported with GREAT CAUTION to prevent loads from striking low overhead objects or tipping during turns, abrupt stops, or high winds.

RACK USE AND CARE

Do not over fill the rack. Racks do a better and safer job when used in the manner for which they are designed. Plan your work, and do not overload.

Check for damaged parts before each use. Carefully check that the rack will operate properly and perform its intended function. Replace damaged or worn parts immediately.

Never load the rack with a damaged part.

Do not let children play with or around the rack. It is not a toy. Store it in a dry, secure place out of the reach of children. Inspect the rack for good working condition prior to storage and before re-use.

Use only accessories that are recommended by the manufacturer for use with your rack.


Accessories that may be suitable for one rack may create a risk of injury when used with another rack. Be aware of the different loading capacities of each accessory.

Parts List

Part#	Description	Q'ty	Part#	Description	Q'ty
1	T-support	1	3	φ 16 Pin	1
2	L-extension	1	4	φ 3.8 Clip	1

ASSEMBLY

ASSEMBLY 1

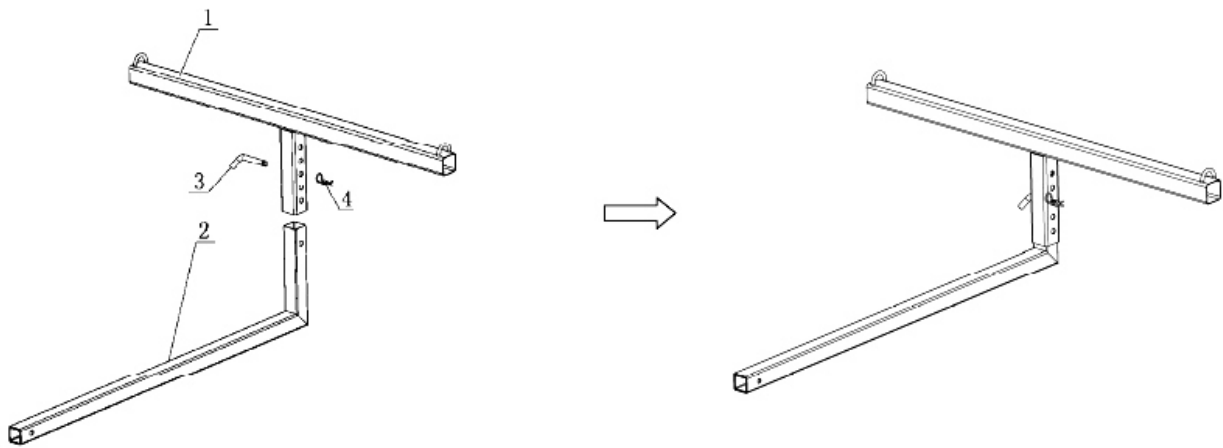

1. With the short end of the L-extension (2) facing up, slide it into the T-support (1);
2. The T-support (1) has 5 holes to change the height. Line up the hole on the T-support (1) with the desired hole on the L-extension (2);
3. Insert the pin lock (3) through the T-support (1) and the L-extension (2), secure with P 3.8cotter pin (4).
4. Pull on the L-extension (2) and the T-support (1) to make sure they are properly locked in place.

ASSEMBLY 2

Assembly 2 are all same with that of assembly 1 except that we change the connection side of L-extension (2) to be the long end for the T-support (I).

