Roof Rack 150 LBS

Model: 4A-CC907



SPECIFICATIONS

Art	Description
capacity	150 lbs
Overall dimensions	46x36x4.5 in
Material	steel

UNPACKING

WARNING! Do not operate the tool if any part is missing. Replace the missing part before operating. Failure to do so could result in a malfunction and personal injury.

Remove the parts and accessories from the packaging and inspect for damage.

Make sure that all items in the parts list are included.

Contents:

- M6 Nylon locknut
- M6*30 Bolt
- M5 Bolt

Required contents not included:

- 3/8 in. Open wrench
- 1/4 in. Hex wrench
- Cross screwdriver

SPECIFIC SAFETY PRECAUTIONS

WARNING! DO NOT let comfort or familiarity with product (gained from repeated use) replace strict adherence to the tool safety rules. If you use this tool unsafely or incorrectly, you can suffer serious personal injury.

1. Use the correct tool for the job. This tool was designed for a specific

function.
Do not modify or alter this tool or use it for an unintended purpose.
2. Do not use the tool if any parts are damage broken or misplaced. Repair or replace the parts.
3. Ensure that the universal brackets are securely attached to the vehicle cross bars.
4. Periodically check knobs and screws for tightness.
5. Never exceed the recommended loading capacity of 150 lb.
6. Remove basket when not in use.

CARE & MAINTENANCE

1. Maintain the tool with care. A tool in good condition is efficient, easier to control and will have fewer problems.
2. Inspect the tool components periodically. Repair or replace damaged or worn components. Only use identical replacement parts when servicing.
3. Maintain the tool's labels and name plates. These carry important information.

TROUBLESHOOTING

Visit a Princess Auto Ltd. location for a solution if the tool does not function properly or parts are missing. If unable to do so, have a qualified technician service the tool.

STORAGE

When not in use for an extended period, apply a thin coat of lubricant to the steel parts to avoid rust. Remove the lubricant before using the tool again.

ASSEMBLY & INSTALLATION

Numbered references in parenthesis (#1) refer to the included Parts List. Dashed numbers in parenthesis (Fig.1-1) refer to a specific point in an illustration or image.

1. Slide the front basket (#1) and rear basket (#2) together (Fig.1).
2. Secure the top rail with the M5 bolt (#8) and the bottom rail with the M6*30 Bolt (#7) and M6 Nylon Locknut (#6) (Fig.2).
3. Position the basket appropriately on the roof bars of the vehicle.
4. Snap the bracket saddle (#5) onto the basket. The saddle must sit on the cross bars of the vehicle. Secure it with the U bolt (#3) (Fig.3) and knob (#4) （Fig.4）.

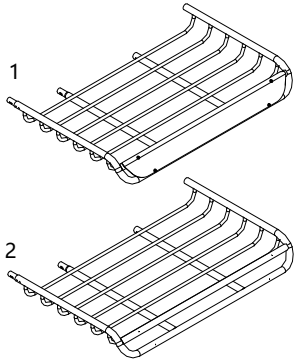


Fig.1

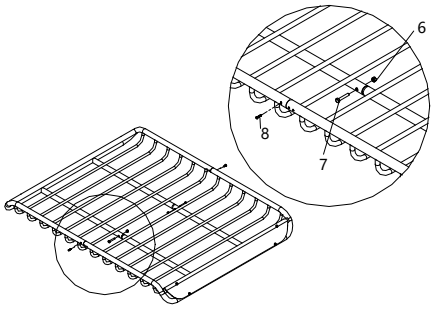


Fig.2

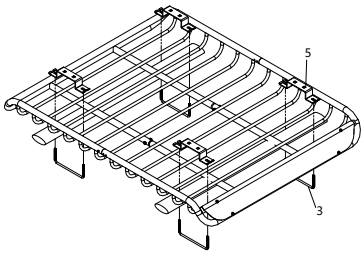


Fig.3


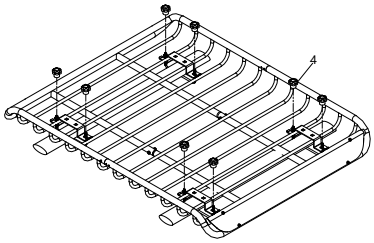


Fig.4

REPARTITION DES PIECES

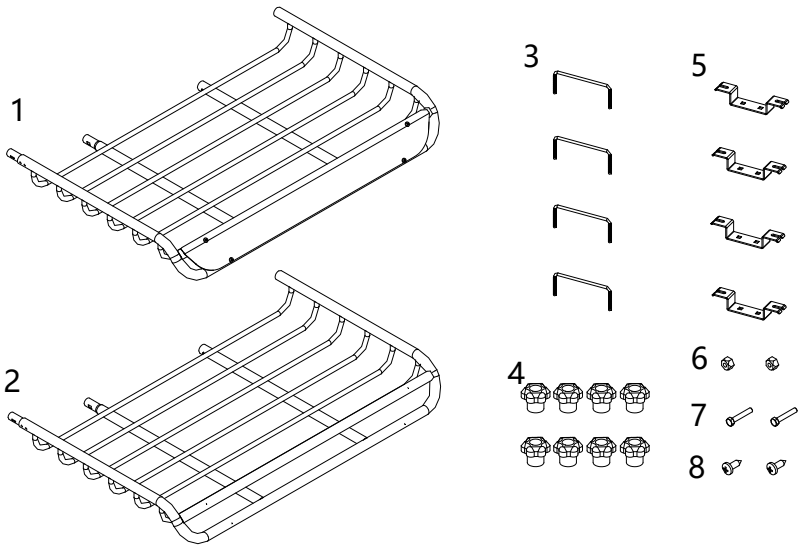

LISRE DES PIECES

Part	DESCRIPTION	OTY
1	Front basket	1
2	Rear basket	1
3	U Bolt	4
4	Knob	8
5	Bracket saddle	4
6	M6 Nylon locknut	2
7	M6*30 Bolt	2
8	M5 Bolt	2