



DURACLAD®

PVC Interlocking Multiwall Panel



DIY



AGRICULTURE



CONSTRUCTION



Smooth, bright white surface is chemical, mold, bacterial and water resistant.



Warrantied for 20 years, and easy to maintain.



Duraclad is stronger than other PVC liner panels with thicker inner walls.



Secure tongue and groove design with hidden fasteners for easy installation that allows for expansion and contraction.

Class A fire rating.



Stronger by Design.

Overview

Lightweight, installer-friendly DURACLAD® interlocking PVC wall and ceiling panels are the smart alternative to traditional FRP and drywall. Featuring a multiwall structure, DURACLAD panels are tough, rigid and water-resistant, ideal for demanding conditions and high moisture areas.

DURACLAD'S interlocking tongue-and-groove design allows for fast installation and a smooth, hygienic finish. Inherently resistant to bacteria, mold & mildew, DURACLAD can withstand harsh chemicals and frequent cleaning and sanitary maintenance.

DURACLAD panels are ideal for residential, commercial or agricultural interior cladding projects.

www.palram.com/us

Main Benefits

- Quick & easy tongue and groove installation directly onto wall studs
- Fasteners are completely hidden
- Easy to clean/sanitize smooth surface
- Water resistant
- Excellent chemical resistance
- Resists gases and chemicals emitted by animal waste
- Excellent light reflectance
- Nonflammable, Class A
- Attractive high-gloss white finish
- Duraclad Designer Series in white shiplap finish also available

Typical Applications


- Dairy, Hog, and Poultry Farms
- Fertilizer Storage
- Barns & Workshops
- Kennels & Vet Clinics
- Food Processing
- Commercial Kitchens
- Chemical Processing Plants
- Meat Packing
- Laboratories
- Car & Truck Washes
- Indoor Grow Operations
- Basements & Garages
- Laundry Rooms
- Marinas
- Factories & Warehouses
- Office Spaces



Product Availability

Standard Stock	Imperial	Metric
Panel Width	16"	406mm
Panel Length(s)	8', 10', 12', 16', 20'	2.44m, 3.05m, 3.66m, 4.88m, 6.01m
Thickness	0.50 in. (1/2")	12.7mm
Standard Color	Bright White	

Panel Profile

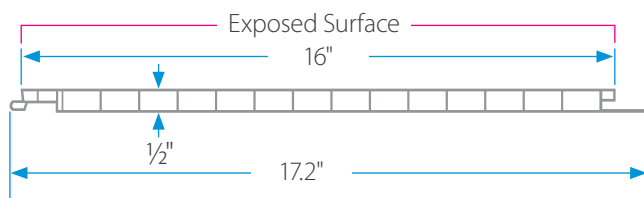

Special Orders Also Available*

Width:	16" (406 mm)
Length:	Up to 20'
Thickness:	0.50 in. (12.7mm)
Colors:	Bright White

*Special orders available; subject to surcharge and/or minimum order requirements.

Regulatory Code Compliance Certification

Organization	Standard	Classification
ASTM	E84-17a	Class A
ASTM	D635-74	CC1
FDA/USDA	Walls & Ceilings	Pass
CFIA	Walls & Ceilings	No longer required†
ASTM	D3273-16	10 (resistant to mold)

† The CFIA office is closed and no longer pre-approves construction materials, packaging materials, non-food chemicals and working apparel. The reference listing continues to be available on the CFIA website as a reference only, however, the list is no longer maintained. Learn more at www.inspection.gc.ca.


NEW Duraclad Designer Series




Ask your Palram representative about Duraclad Designer Series in white shiplap finish for the look and feel of real wood..

Installation Accessories


For optimum performance and durability, use Palram Duraclad® installation accessories.




Base Trim




Inside Corner




Outside Corner




J-Trim



H-Divider



F-Trim



3/16" x 1/4" Tapcon® Screw with a stainless steel washer (1/4" ID. x 1/2" OD. x 1/32" thick) (supplied by others)



#8 or #10 x 1/4" Stainless Steel Screw with 1/2" dia. low profile screw head (supplied by others)

20 Year Limited Warranty

Duraclad carries a manufacturer's 20 year limited warranty. See warranty for complete details.

Duracladpanels.com



PALRAM AMERICAS
 9735 Commerce Circle
 Kutztown, PA, 19530 USA
 800.999.9459
 ContactUs.USA@palram.com
 palram.com/us



Authorized Distributor

Inasmuch as Palram Americas has no control over the use (and/or installation method) to which others may put this material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make their own test to determine the suitability of the material for their own particular use. In the event of a warranty claim for product failure, Palram Americas reserves the right to inspect any or all of the sheets involved and the installation site itself while the sheets are still in their original position and have not been removed or moved or altered in any way.

