Roof Basket Extension

SPECIFICATIONS

Dimensions (Length x Width x Depth)	21 x 37 x 5 in.
Finish	Powder-Coat
load capacity	200 lbs

SAFETY

WARNING! Read and understand all instructions before using this device. The operator must follow basic precautions to reduce the risk of personal injury and/or damage to the equipment.

Keep this manual for safety warnings, precautions, operating or inspection and maintenance instructions.

1. Use the correct device for the job. This device was designed for a specific function. Do not modify or alter this device or use it for an unintended purpose.
2. Operate in a safe work environment. Keep your work area clean, well-lit and free of distractions.
3. Control the device, personal movement and the work environment to avoid personal injury or damage to device.
4. Do not operate any device when tired or under the influence of drugs, alcohol or medications.
5. Always wear impact safety goggles that provide front and side protection for the eyes. Eye protection equipment should comply with CSA Z94.3-07 or ANSI Z87.1 standards based on the type of work performed.
6. Wear protective clothing designed for the work environment and device.
7. Do not overreach when operating a device. Proper footing and balance enables better control in unexpected situations.

UNPACKING

WARNING! Do not operate the device if any part is missing. Replace the missing part before operating. Failure to do so could result in a malfunction and personal injury.

Remove the parts and accessories from the packaging and inspect for damage. Make sure that all items in the parts list are included.

Contents:

• Roof Basket Extension • Side Plates x 2 • Hardware

ASSEMBLY & INSTALLATION

The Roof Basket Extension increases the Roof Mount Cargo Carrier (SKU 8681835) length and storage capacity by 21 inches.

1. Remove the side plates (#3) and M6*16 bolts (#2) from each side of the roof basket. Separate the two halves (Fig. 1)
2. Place the extension (#1) between two halves of roof rack. Slide the three sections together until all are seated (Fig. 2).
3. Reattach all side plates (#3) and secure each plate by using two M6*16 bolts (#2) (Fig. 2).

CARE & MAINTENANCE

1. Maintain the device with care. A device in good condition is efficient, easier to control and will have fewer problems.
2. Inspect the device components periodically. Repair or replace damaged or worn components. Only use identical replacement parts when servicing.

WARNING! Only qualified service personnel should repair the device. An improperly repaired device may present a hazard to the user and/or others.

TROUBLESHOOTING

Visit a Princess Auto Ltd. location for a solution if the device does not function properly or parts are missing. If unable to do so, have a qualified technician service the device.

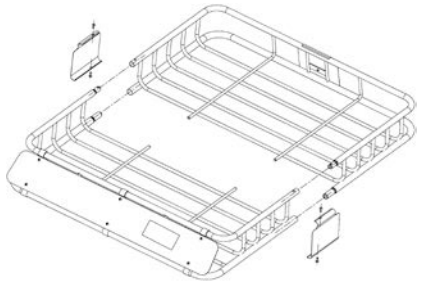


Fig. 1

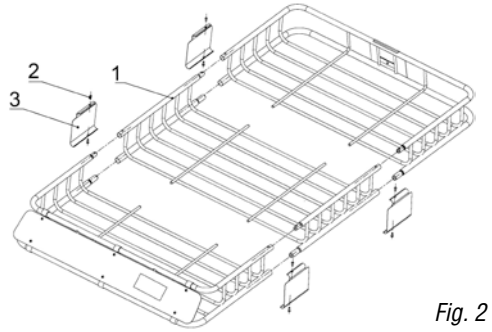


Fig. 2