


DIGITAL TIRE INFLATOR

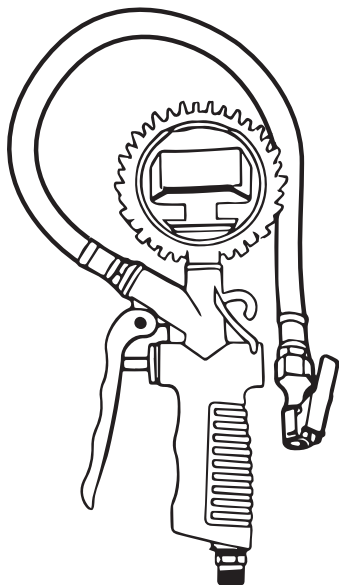

SAFETY INFORMATION

The warnings and precautions discussed in this manual cannot cover all possible conditions and situations that may occur. Please be aware of the potential hazards, and take all necessary precautions to avoid risk of injuries.

WARNING:

To avoid serious personal injury, do not attempt to use this product until you read the manual thoroughly and understand it completely. Save this manual and review frequently for continued safe operation and instruction of others who may use this tool.

GENERAL SAFETY RULES



Read this instruction manual before connecting this device to the air supply system. Be thoroughly familiar with the controls and the proper use of the equipment.

The following safety precautions must be followed at all times along with any other existing safety rules.

- Safety glasses must be worn during operation. Always work in a well ventilated area.
- Do not exceed any pressure rating of any component in the system. Protect air lines from damage and/or punctures.
- Check air hoses for weak or worn condition before each use. Make sure all connections are secure.

WARNING:

Do not attempt to modify this tool or create accessories not recommended for use with this tool. Any such alteration or modification is misused and could result in hazardous conditions leading to possible serious personal injury.

OPERATOR'S MANUAL

STORE THIS MANUAL IN A SAFE PLACE FOR FUTURE REFERENCE

UNPACKING

1. This tool has been shipped completely assembled.
2. Carefully remove the tool from the packaging.
3. Inspect the tool carefully to make sure no breakage or damage occurred during shipping.
4. Do not discard the packing material until you have carefully inspected and satisfactorily operated the tool.

SPECIFICATIONS

Air Inlet	1/4in.NPT
Max. Working Pressure	150 PSI
Accuracy	±2 PSI
Display Power	2 AAA Batteries


FEATURES

- Clip-on chuck for hands-free inflation
- Built-in relief valve quickly reduces pressure
- Flexible 16in. all-weather hose for easier access to tight areas
- Lightweight and durable composite material body
- Digital Pressure readout with LCD back-light
- Two-position trigger makes it easy to inflate or deflate


OPERATION

INFLATING / DEFLATING

1. This tool has been shipped with batteries included. To use this tool, directly remove transparent plastic insulating strip from the batteries. When you need to install the new batteries, peel back the rubber cover and open the battery compartment on the back of the tool.

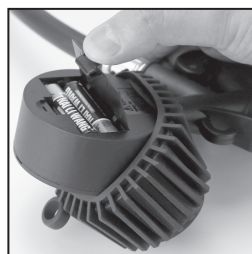


2. Connect the tool to the air source with a 1/4in. NPT female connector.

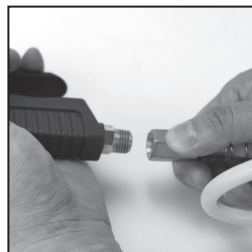

3. Depress the clip on the air chuck lever and press firmly on to the tire valve stem. Once the chuck is attached to the tire valve stem, release the chuck lever.



4. Press the ON/OFF button to turn on the inflator.

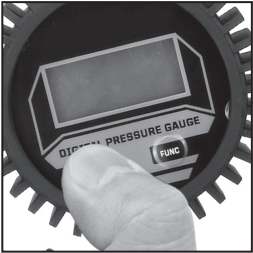

5. Press the FUNC button to choose the desired unit.



6. Fully squeeze the trigger to the second position to inflate the tire.



7. Partially squeeze the trigger to the first position to deflate the tire.



8. Once the pressure gauge reaches the desired pressure, remove the air chuck from the tire valve.

TOOL OPERATION NOTES

1. The inflator needs an air source to inflate. This tool CANNOT inflate tires by itself.
2. The back light LCD will turn off if no operation is applied to the tool within 15 seconds. Press the ON/OFF button to reactivate the back light.

3. Hold the ON/OFF button to turn off the inflator. Otherwise, the tool will shut off after 15 seconds if the pressure is 0 PSI and no operation is applied.

MAINTENANCE

⚠ WARNING:

Disconnect the tool from the air source before performing any maintenance on the tool.

⚠ WARNING:

Do not let brake fluids, gasoline, petroleum-based products, penetrating oils, etc. come in contact with plastic parts. Chemicals can damage, weaken, or destroy plastic which may result in serious personal injury.

⚠ WARNING:

Do not connect with an air compressor that can potentially exceed the maximum recommended air pressure. The tool may burst, possibly causing injury.

1. Do not mix old and new batteries. Do not mix alkaline, standard (carbon-zinc), or rechargeable (ni-cad, ni-mh, etc.) batteries.
2. Clean the entire tool with a cotton rag after each use. Avoid using solvents when cleaning plastic parts. Most plastics are susceptible to damage from various types of commercial solvents and may be damaged by their use. Use clean cloths to remove dirt, dust, oil, grease, etc.

SATISFACTION GUARANTEED

Satisfaction is guaranteed. If for any reason you are not completely satisfied with your purchase, please return it to any Tractor Supply Co.® store.



WARNING: BEFORE USE, READ AND UNDERSTAND OPERATOR'S MANUAL. Improper operation or maintenance of this product could result in serious injury and property damage. Read and understand all warnings and operation instructions before using this equipment. When using air tools, basic safety precautions should always be followed to reduce the risk of personal injury.

WARNING: This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

WARNING: Contains lead. May be harmful if eaten or chewed. Keep out of the reach of children.



DISTRIBUTED BY:
Tractor Supply Company,
5401 Virginia Way, Brentwood, TN 37027
CUSTOMER SUPPORT: 1-888-376-9601
www.TractorSupply.com
MADE IN CAMBODIA