

IMPORTANT SAFETY INFORMATION

⚠ WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Caution: 1. Do not point the nail outlet of the nail gun at people.

Caution: 2. Keep children away from the tool, the nail gun can be dangerous.

Caution: 3. Always wear safety glasses when using this tool.


Specifications

Stapler Dimensions	6-5/16" x 5-1/2" W x 1-3/16" diameter
Trigger	Palm Squeeze type
Fastener Types Included	Standard staples, brad nails and U-shaped staples
Magazine	Spring loaded slide strip

List of Contents

Part(s)	Description	Qty
Staple Gun	Tool	1
Standard Staples	T50, 3/8" crown x 5/16" L	500
Brad Nails	3/8"	500
U-Shaped Staples	1/4" crown x 1/2" L	500

Functions

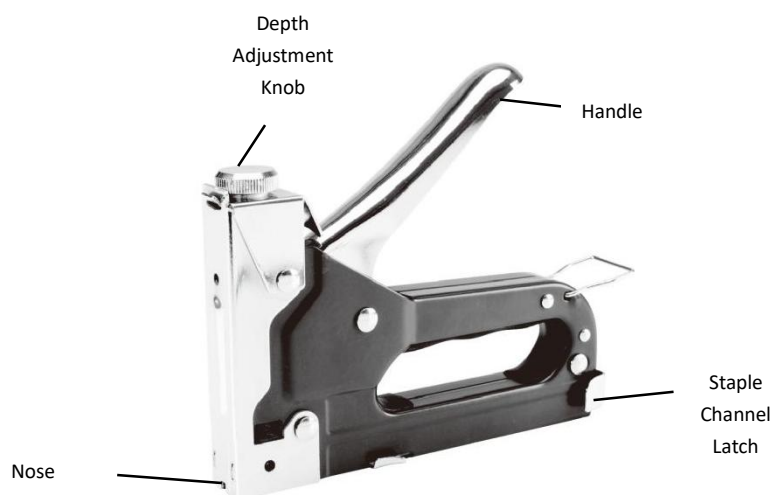

Operating Instructions

1. Push the End Clip forward and down to release the Staple Channel Latch. Pull out the Staple Channel. **See Figure A.**

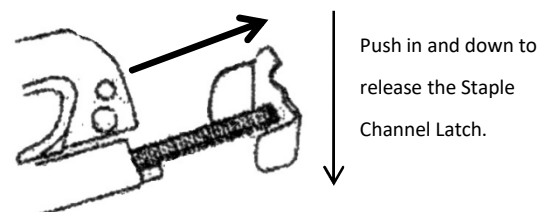


Figure A

2. Load the staples or brad nails into the Staple Channel. Each of the fasteners is to be loaded into the Staple Channel with its sharp end facing the base of the Staple Channel. **See Figure B.**

3. Staples are to be inserted into the center of the Staple Channel. Brad nails are to be inserted on either side of the Staple Channel, but not placed in the center of the Staple Channel.

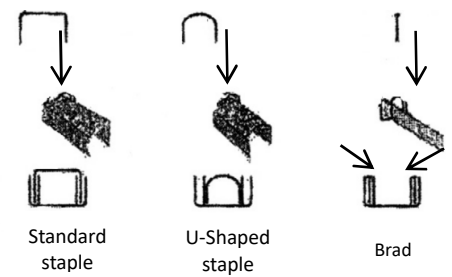


Figure B

4. Push the Staple Channel Latch inward until it reaches the end, then pull it upward to lock it in place.

Note: To adjust force that will be exerted on the fastener to drive it deeper into the work piece, use the Depth Adjustment Knob.

5. Turn the Depth Adjustment Knob clockwise to increase the force to drive the fastener, and counterclockwise for less force driving the fastener.

6. Hold Tool against nailing point and squeeze handle to drive nails.

7. After nailing is completed, remove the nails according to step one.

Cleaning, Maintenance, and Lubrication

1. BEFORE EACH USE, inspect the general condition of the tool. Check for:

- Loose hardware,
- Misalignment or binding of moving parts,
- Cracked or broken parts, and any other condition that may affect its safe operation.

2. AFTER USE, wipe external surfaces of the tool with clean cloth. Do not use flammable corrosive or abrasive solvents.

Cleaning and Removing the Staple Channel

1. Pull the Retaining Clip at the front of the Staple Gun forward to release the Staple Channel. Pull the two tabs (located midpoint on the bottom of the Staple Gun) toward the back of the Staple Gun.

2. The Staple Channel is now free of the Staple Gun and can be cleared of any jammed fasteners.