

- 6,000 BTU window air conditioner, electronic control
- Electronic controls with 4 modes and 3 fan speeds
- 4-way air direction directs cool air evenly throughout the room
- Easy-to-install window kit included.



**Sleek design with touch control**



**3-IN-1 Comfort**

Cooling, dry and ventilation.



**Washable Filter**

Washable filter helps to reduce bacteria, odors, and particles.



**Warranty**

Two (2) years Parts & Labor

### Cool Comfort – Ultra-slim design for smaller spaces

The Hisense AAW06CR26 Window Air Conditioner can be placed in smaller rooms up to 250 sq.ft and is easy to install with the included window kit. Airflow is strong and quiet. with a noise level of just 51 dB when fan speed is set to Low. This Hisense window air conditioner cools, dehumidifies, and can function in fan mode.

### TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS	
<b>Performance</b>	
Model #	AAW06CR26
Dehumidification(Pints/24 hours)	19.2
Cooling / Heating Capacity (BTUs/hr)	6000 / --
CEER	11.0
Coverage (sq ft)	Up to 250
Refrigerant	R-32
Airflow (cfm) (hi/low)	180 - 206
Noise Level in dB(A)	51-55
<b>Electrical</b>	
Voltage / Freq / Amps	115V / 60Hz, 6.4A* / 4.8A
Plug Type / NEMA#	A / 5-15P
Watts – Cooling / Heating	535 / --
Electrical Receptacle	115V/15A
<b>Control Features</b>	
Thermostat Type	Electronic
Fan Speed Cooling	3
Fan Speed Only	3
Eco Mode	Yes
Display Type	LED
Dry Mode	Yes
Sleep Mode	Yes (on remote)
Timer	Yes, 24h on / off (on remote)
Filter Monitor	Yes
<b>Unit Features</b>	
Chassis Type	Fixed
Air Deflection	4-Way
Air Discharge Type	Top Discharge
Washable Filters	Yes
Filter Type	Easy Access
<b>Accessories</b>	
Installation Kits	Yes. included
Remote Controller	Yes. included
<b>Approvals</b>	
Safety	UL
Energy Star	--
<b>Shipping</b>	
Unit Dimension WxHxD (mm)	406 x 300 x 345


Net Weight (Kg)	17.5
Unit Dimension WxHxD (inch)	16 x 11.8 x 13.6
Net Weight (lbs)	38.6
<b>Product</b>	
Parts & Labor	2 years
UPC	

**Note:**


\*: Rated Amps(A) / accorded UL 60335 Safety

### Product Images

#### Sleek Design with Touch Control

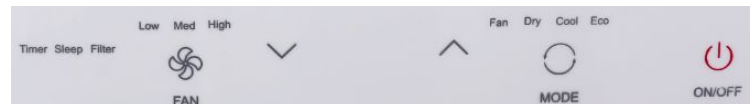

#### Window Opening

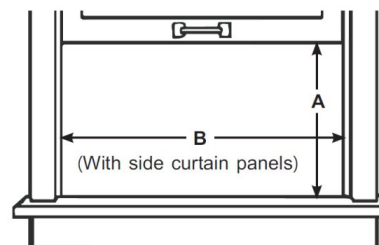

A: 12 2/5" (31.5 cm) min  
B: 22" (56 cm) - 37 4/5" (96 cm)

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2021 Hisense USA, All rights reserved

Hisense USA Corporation  
7310 McGinnis Ferry Road, Suwanee, GA, 30024  
1-888-935-8880  
www.hisense-usa.com