


PLEXALIFE™
SWING SET FRAME

PLS-SW-SET-BX5

USER MANUAL



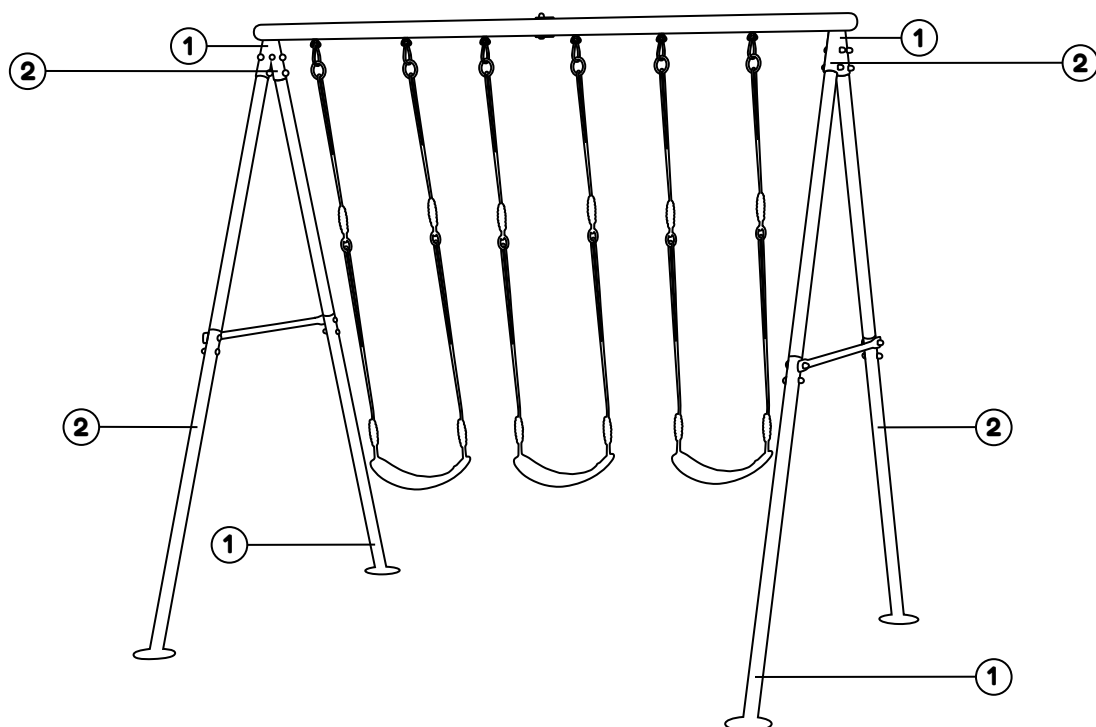


PARTS LIST

NAME	PHOTO	QTY	SIZE
Top bar 1		1	D3''xL59''
Top bar 2		1	D3''xL65''
Clamping plate		2	
Upper leg		4	D3''xL59''
Lower leg		4	D3''xL59''
Supporting bar		2	
Swing seat		2	
Trapeze		1	
Bolt		4	M10*90
Bolt		17	M10*85
Gasket		40	M10
Nut		20	M10
Expansion screw		4	
Anchor		4	
Inner-hexagon-wrench		1	
Spanner		1	




LEGS INSTALLATION

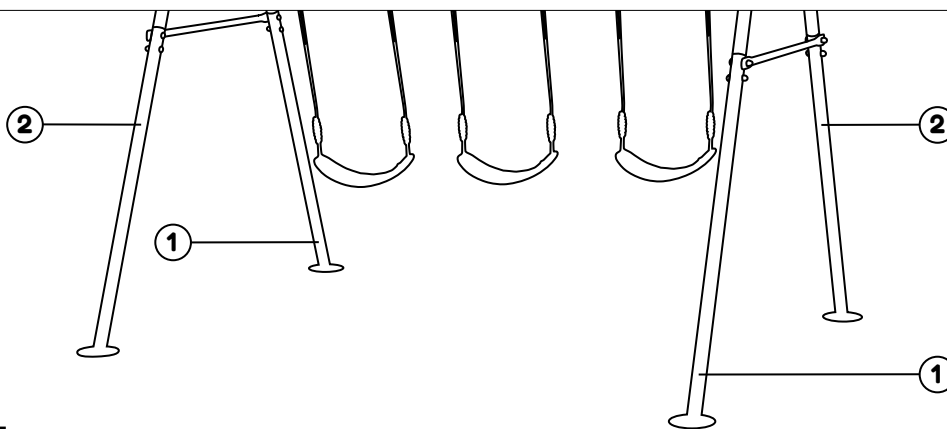


STEP 1:

Find 4pcs of lower legs,
2 pcs numbered with 1,
2 pcs numbered with 2.

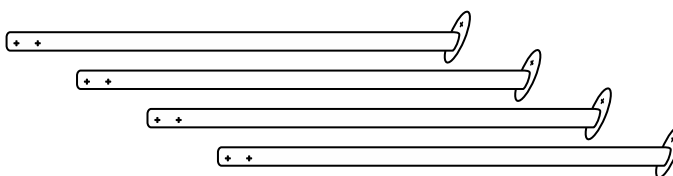

STEP 2:


Find another 4pcs of
upper legs, all of which
are shrunk at the two ends,
connect all the upper legs
with the lower legs.

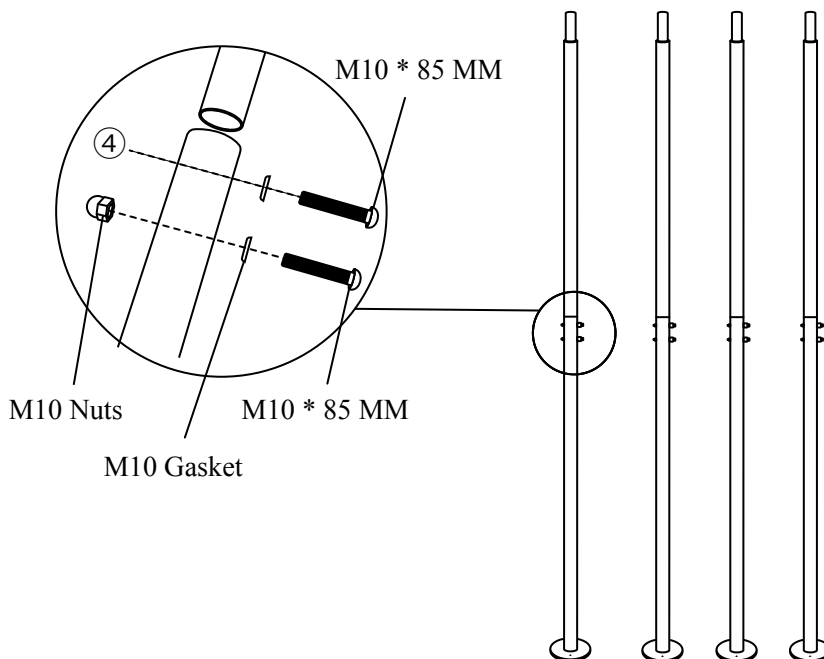

TOP BAR INSTALLATION


STEP 3:

Find 2 pcs of top bars with A shaped frame, and connect them into 1 pc.
Find 2 pcs of clamping plates to connect the top bar a second time to reinforce the joint.

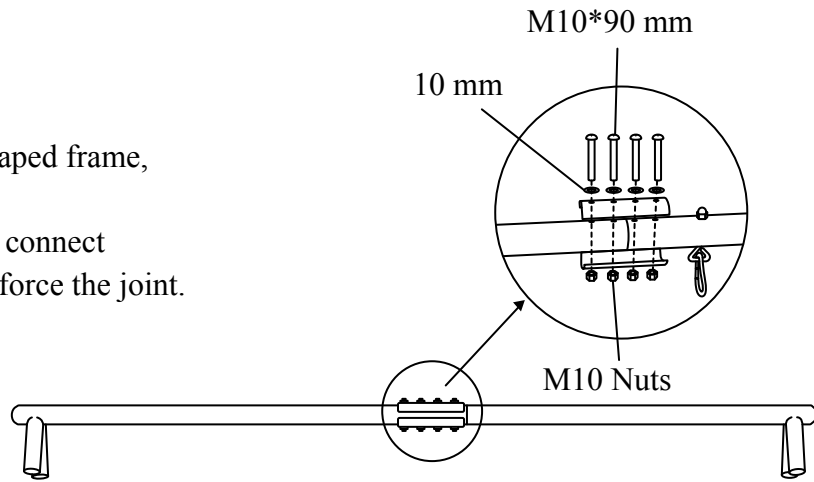

STEP 4:

Connect the top bar with the legs.
The A shaped frame of the top bar numbered with 1 should be connected with the lower leg numbered with 2, conversely, the A shaped frame numbered with 2 should be connected with lower leg 1.

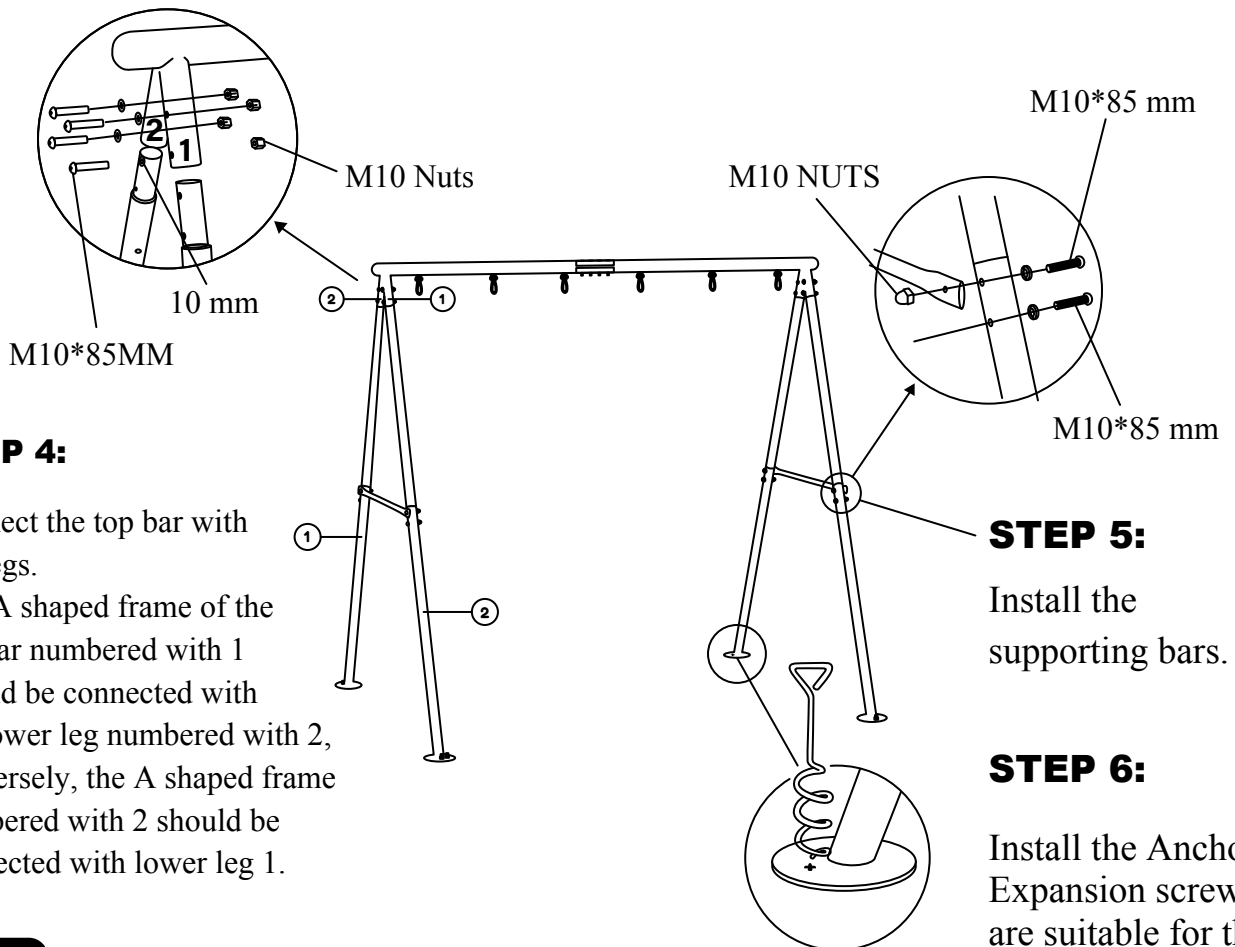

STEP 5:
Install the supporting bars.

STEP 6:
Install the Anchors. Expansion screws are suitable for the concrete floor.

Note

When attaching the swing seats to the frame, it is recommended to position them at a minimum height of 12 inches (30 cm) above the ground. You may adjust the seat height as needed by repositioning the chains.