Introducing

GEN II

SCREW PRODUCTS INC
EST. 1999

THE ULTIMATE FASTENERS

EXTERIOR

WOOD TO STEEL

ROCO™

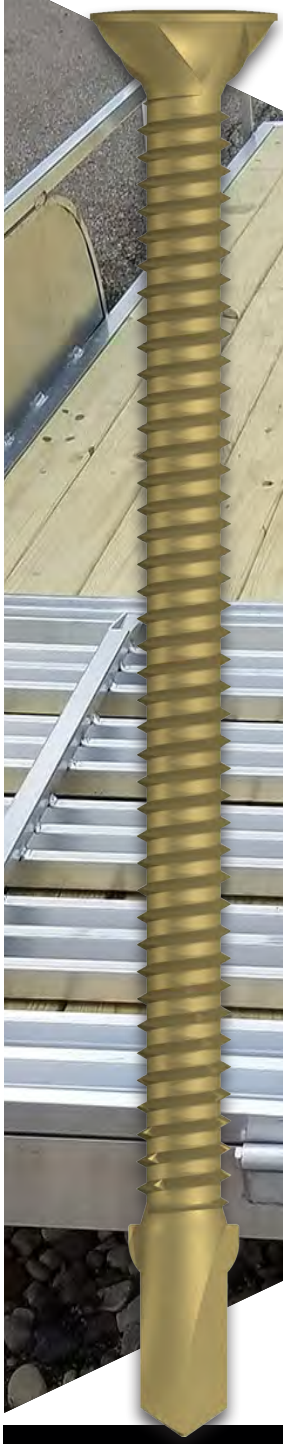

Horizon Curve™

A slight curvature of the head for elegant, professional, architectural results. The Finish Ring underneath the head also provides a better finish by cutting the top fibers in the wood for an extra step in countersinking.

Turbine Ribs™

Patented[1] Turbine Ribs cut quickly into the wood, leaving a professional, clean finish with maximum wood contact. The cup shaped, countersinking head provides increased holding power and reduced risk of splitting.

Unique Wing Design

The unique wing design is engineered to mill an oversize hole in the wood without breaking. As soon as the wings reach the steel, they easily break off, allowing the threads to tap into the steel base.



Superior Drill Point

The drill point has been specifically engineered to penetrate the steel as fast as possible. The angle and shape of the point makes it possible to remove steel chips fast and efficiently to enhance penetration.

The advanced Wood to Steel Screw with **ZYTEC™ GX** corrosion protection coating for exterior environments.
Great for any size job or project.

Available in 1lb, 5lb and 1/4 Keg
All Packaging Includes Drive Bit!

WWW.SCREW-PRODUCTS.COM
Gig Harbor, WA • Bradenton, FL
Toll-Free 1-877-844-8880

Weights and counts subject to change without notice.

THE ULTIMATE FASTENERS

(1) Patent # 11,346,388 B2
(2) Patent # 11,359,661 B2

FOLLOW US

#SCREWPRODUCTSINC

Mar 24, 2026

ROCO™

SCREW PRODUCTS INC EST. 1999

THE ULTIMATE FASTENERS

EXTERIOR

WOOD TO STEEL

The ROCO™ Wood to Steel screw is specifically designed for increased holding power and an incredibly clean finish. When engaging the wood, the screw effortlessly drills through the wood while the wings mill an oversized hole. When the screw engages the steel base, the oversized hole prevents threads from engaging the wood, lifting wood and steel apart (jacking). The specially engineered drill point cuts fast through the steel and the threads firmly clamp the wood and steel together.

STAR DRIVE

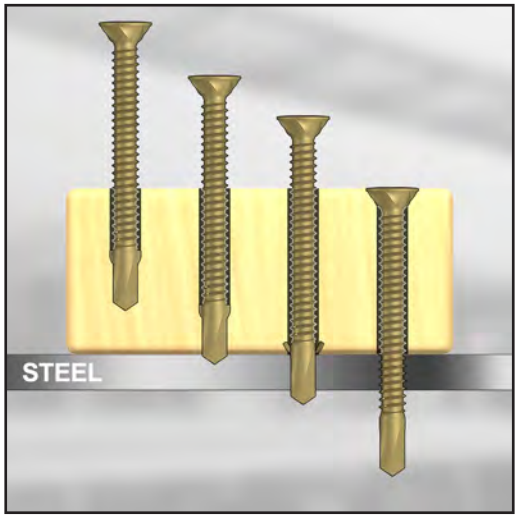

TX20 TX30 EXT

Sizes Available: #10 x 1-1/2" to #14 x3-3/4"

General Info	
Type of Screw	Wood to Steel
Material	Heat Treated, Hardened Steel
Coating	ZYTEC™ GX
Head Style	Countersinking TX20/30 Star Drive
Point Type	Drill Point

Construction	#10	#12	#14
Head diameter	0.350"	0.386"	0.488"
Minor thread diameter	0.138"	0.161"	0.192"
Major thread diameter	0.186"	0.212"	0.246"
Shaft diameter	Full Thead	Full Thead	Full Thead
Drive Size	TX20	TX20	TX30

Product Range			Approx Count per 1lb		
Length	Thread	Drill Pt.	#10	#12	#14
10 x 1-1/2"	Full Thead	#3	130		
12 x 2"	Full Thead	#3		74	
12 x 2-1/2"	Full Thead	#3		57	
14 x 2-3/4"	Full Thead	#4			38
14 x 3-3/4"	Full Thead				28

	Drill Capacity		Wood Thickness
#10 Drill Point #3	Min	Max	Max
10 X 1-1/2"	0.059"	0.197"	0.71"
#12 Drill Point #3			
12 X 2"	0.059"	0.236"	1.10"
12 X 2-1/2"	0.059"	0.236"	1.69"
#14 Drill Point #4			
14 X 2-3/4"	0.138"	0.315"	1.69"
14 X 3-3/4"	0.138"	0.315"	2.68"

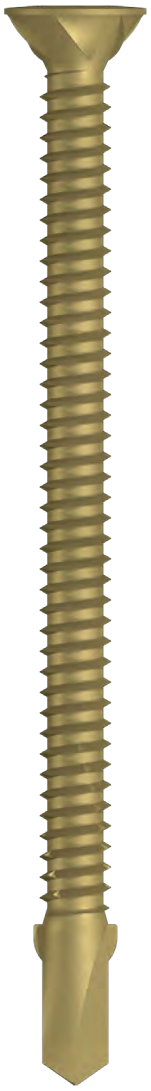

TYPICAL EXTERIOR USE

ZYTEC™GX Coating: Tested and recognized for use in most ground contact pressure treated lumber for general exterior construction as described by the American Wood Protection Association (AWPA) U1 UC4A or below. Always follow timber manufacturer's recommendations for fasteners.

Common Applications

- Commercial & residential
- Wood to steel
- Truck & Trailer beds
- Wood rails on steel posts
- And Much more!

WWW.SCREW-PRODUCTS.COM
Gig Harbor, WA • Bradenton, FL
Toll-Free 1-877-844-8880

Weights and counts subject to change without notice.

THE ULTIMATE FASTENERS

(1) Patent # 11,346,388 B2
(2) Patent # 11,359,661 B2

FOLLOW US

#SCREWPRODUCTSINC

Mar 24, 2026