Introducing

GEN II

SCREW PRODUCTS INC
EST. 1999

THE ULTIMATE FASTENERS

316 STAINLESS STEEL STRUCTURAL LAG

NOVA™

NEW! 316 STAINLESS STEEL

Horizon Curve™
A slight curvature of the head for elegant, professional, architectural results. Whether countersinking or surface mounting, the results are impressive!

Locking Wedges
The locking wedges help to mill and countersink the head into the wood for a clean finish. It also locks the head into place preventing unwanted future movement.

Twin Blades™
Patented[2] Twin Blades knurls cut fast to dramatically reduce friction and heat on the shank, while reducing load on the drill. They also provide better performance by removing debris faster than a standard fastener's knurl.

Fast Start Tip
With sharp threads all the way to the tip, the fastener has an immediate grip for a fast start. The inset thread cut drastically reduces the splitting effect and minimizes the driving torque needed to engage the wood.

The advanced Heavy Duty Structural Lag Screw in **316 Stainless Steel** for typical high corrosive, environments. Great for any size job or project.

Available in 50ct packaging.

WWW.SCREW-PRODUCTS.COM
Gig Harbor, WA • Bradenton, FL
Toll-Free 1-877-844-8880

Weights and counts subject to change without notice.

THE ULTIMATE FASTENERS

(1) Patent # 11,346,388 B2
(2) Patent # 11,359,661 B2

FOLLOW US
#SCREWPRODUCTSINC

Mar 24, 2026

NOVA™

SCREW PRODUCTS INC EST. 1999

THE ULTIMATE FASTENERS

316 STAINLESS STEEL STRUCTURAL LAG

The NOVA™ Structural Lag is the superior lag screw for any of your projects. With a strong thread that ensures maximum withdrawal strength and extra sharp Fast Start Tip that easily grips and cuts its way through the wood, you will feel the power and quality of the NOVA. The Self-Tapping Thread cuts effectively through materials such as wood, plastic and sheet metal. The patented[2] Twin Blades™ ensure minimum friction on the shank and the Locking Wedges under the head countersink perfectly with maximum wood contact.

TX30 316

TOUGH ENVIRONMENTS

Stainless Steel AISI 316 is code compliant for use in marine environments with salt-water splash, airborne salts, and areas with de-icing salts.

Common Applications

- Commercial & residential
- Timber
- Ledgers, posts & beams
- Rigid Foam Insulation
- Roofing
- Deck framing
- Docks
- And much more!

Sizes Available: #16 x 2-1/2" to #16 x 6"

General Info	
Type of Screw	General Purpose Wood
Material	316 Stainless Steel
Head Style	Low Profile TX30 Star Drive
Point Type	Modified Type 17

Construction	#16
Head Diameter (Inch)	0.630"
Minor Thread Diameter	0.181"
Major Thread Diameter	0.283"
Shaft Diameter	0.205"
Drive Size	TX30
Product Range Length	**Thread Length #16**
2-1/2"	1-1/2"
3"	1-1/2"
4"	2"
5"	3"
6"	3"

STAR DRIVE

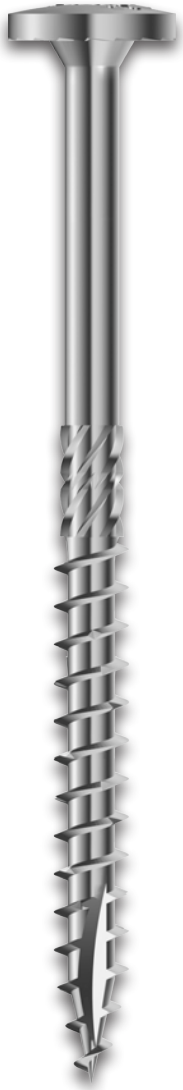

WWW.SCREW-PRODUCTS.COM
Gig Harbor, WA • Bradenton, FL
Toll-Free 1-877-844-8880

Weights and counts subject to change without notice.

THE ULTIMATE FASTENERS

(1) Patent # 11,346,388 B2
(2) Patent # 11,359,661 B2

FOLLOW US

#SCREWPRODUCTSINC

Mar 24, 2026