



6 VOLT – UPGC2-235

CAPACITY	235 Ah
MATERIAL	Polypropylene
BATTERY	Deep-Cycle Flooded/Wet Lead-Acid Battery
COLOR	Black
WATERING	Required

The UltraPower Pro UPGC2-235 Flooded Battery is an affordable, reliable power source for golf carts, AWP's, floor machines, and other industrial equipment. With 235Ah at the 20-hour rate, this durable GC3 battery delivers consistent performance at a budget-friendly price.

Electrical Specifications				
Voltage	6			
Cell(s)	3			
Capacity ^A Minutes	129 @ 75 A			
Capacity ^B Amp-Hours (Ah)	5	10	20	100
	191	216	235	260
Energy (kWh)	1.54 @ 100 Hr			

Physical Specifications			
BCI	GC2		
Model	UPGC2-235		
Terminal Type ^C	Embedded Low Profile Terminal		
Dimensions ^D inches (mm)	Length	Width	Height ^E
	10.30 (262)	7.13 (181)	10.74 (273)
Weight ^F lbs (kg)	65 (29.5)		
Handle	J-Hook Lifting Strap		
Installation Orientation	Vertical/Upright		


Charging Instructions					
Charger Voltage Settings (At 77°F/25°C)					
System Voltage	6V	12V	24V	36V	48V
Bulk Charge	7.41	14.82	29.64	44.46	59.28
Float Charge	6.75	13.5	27	40.5	54
Equalize Charge	8.1	16.2	32.4	48.6	64.8
Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any batter.					

Charging Temperature Compensation	
Add	Subtract
0.005 volt per cell for every 1°C below 25°C 0.0028 volt per cell for every 1°F below 77°F	0.005 volt per cell for every 1°C above 25°C 0.0028 volt per cell for every 1°F above 77°F


Operational Data	
Operating Temperature	Self Discharge
-4°F to 113°F (-20°C to +45°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%.	5 - 15% per month depending on storage temperature conditions.

State of Charge Measure of Open-Circuit Voltage			
Percentage Charge	Specific Gravity	Cell	6 Volt
100	1.277	2.122	6.37
90	1.258	2.103	6.31
80	1.238	2.083	6.25
70	1.217	2.062	6.19
60	1.195	2.040	6.12
50	1.172	2.017	6.05
40	1.148	1.993	5.98
30	1.124	1.969	5.91
20	1.098	1.943	5.83
10	1.073	1.918	5.75

Battery Dimensions

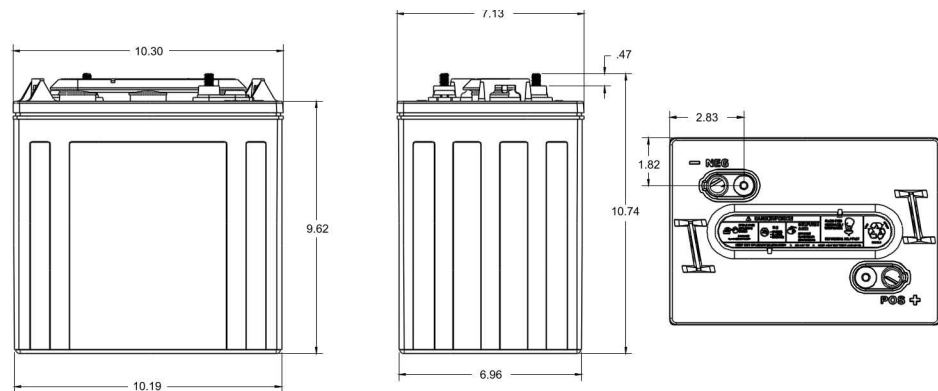

Performance

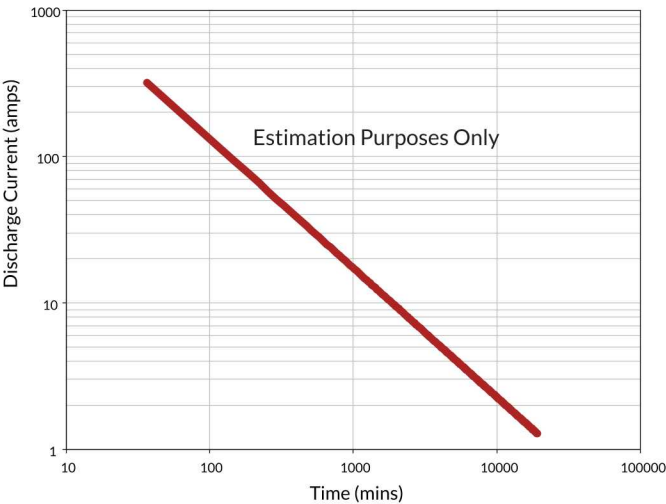


Terminal Specifications^c



Type	ELPT
Description	Embedded Low Profile Terminal
Height Inches (mm)	1.22 (31)
Torque Pounds (Nm)	95-105 (11-12)
Bolt	5/16"

Percent Capacity Vs. Temperature

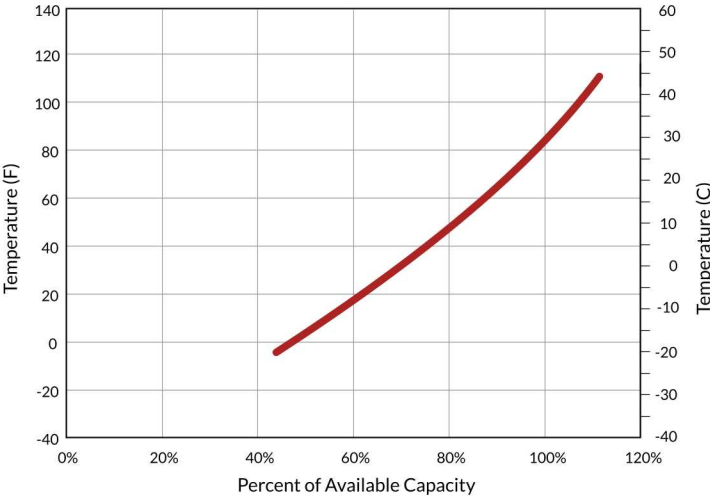

Designed in compliance with applicable BCI standards. Tested in compliance to BCI standards.



BATTERY COMPANY WITH
QUALITY SYSTEM CERTIFIED
BY DNV: ISO 9001:2015

- A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B. The amount of amp-hours (Ah) a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C. Terminal images are representative only.
- D. Dimensions may vary depending on type of handle or terminal. Batteries should be mounted with 0.5 inches (12.7 mm) spacing minimum.
- E. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- F. Weight may vary.