



Upgrade · The Home Creator Way

Ball Mount Hitches

MODEL:HSTCB-2"-DROP6"/HSTCB-2"-DROP8"


HSTCB-2.5"-DROP6"/HSTCB-2.5"-DROP8"/

HSTCB-2.5"-DROP10"

VEVOR Support Center

1	HSTCB-2"- DROP6"		2	HSTCB-2"- DROP8"	
3	HSTCB-2.5"- DROP6"		4	HSTCB-2.5"- DROP8"	
5	HSTCB-2.5"- DROP10"		6		

MODEL:HSTCB-2"-DROP6"/ HSTCB-2"-DROP8"
HSTCB-2.5"-DROP6"/ HSTCB-2.5"-DROP8"/ HSTCB-2.5"-DROP10"

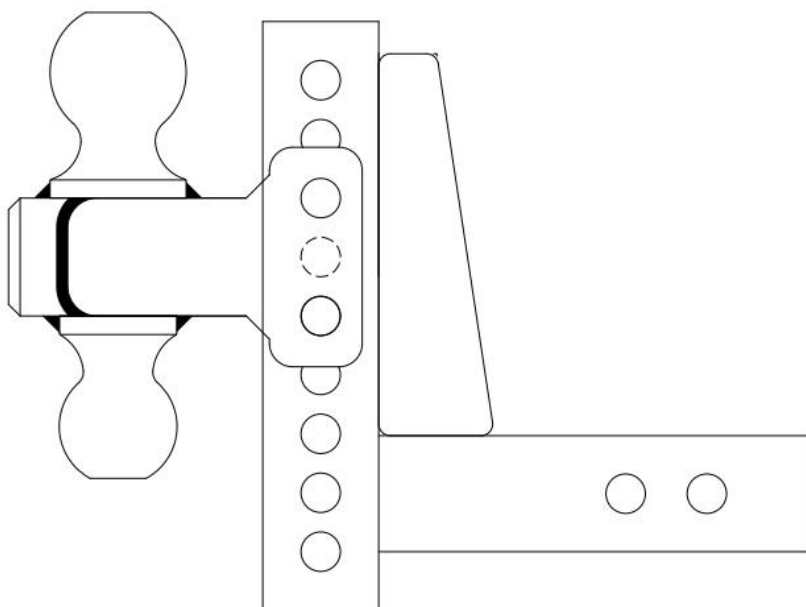

NOTE: Photo for reference. The appearance/parameters/configurations may be partially improved. Please refer to your purchase.

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.



Warning-To reduce the risk of injury, users must read the instructions manual carefully.

WARNING:

1. Never exceed the vehicle manufacturer's recommended towing capacity. The ratings of the mounting system are intended to represent the product's capability and in no way reflect the ratings or capacity of the towing system it is being used with. The consumer or operator is strongly advised to learn the ratings of the various components of the towing system and never exceed the limits of the lowest-rated component being used.
2. Use of any pin other than that of the mount system manufacturer could be a serious safety hazard and will void the warranty. Never hook up trailer safety chains to the mounting system.
3. Installing a safety chain between the vehicle and accessories is highly recommended.
4. Be aware of the danger of "dynamic loading." This situation arises when a load is dropped onto the product, resulting in an excessive short-term load. Dynamic loading can damage and fail the product and/or the attached accessory and cause personal injury to people nearby.
5. Ensure the safety chains operate freely around the mounting system and do not become entangled.
6. This product is not a toy and cannot be used as a toy for children.
7. Remember that the previously discussed warnings cannot cover all possible events and circumstances. The person setting up and using this product must always use common sense.

CAUTION:

1. Defective accessories should be replaced immediately. Defective accessories can lead to personal injury and material damage.
2. During their period of use, accessories must be checked for wear, cracks, and other damage.


SAVE THESE INSTRUCTIONS

MODEL AND PARAMETERS


NOTE: Please match your purchase.

Model	Receiver Tube	Maximum Drop	Trailer Ball	Max. Gross Trailer WT
HSTCB-2"-DROP6"	2"	6"	2" + 2-5/16"	10000lbs /15000lbs
HSTCB-2"-DROP8"	2"	8"		8000lbs /18500lbs
HSTCB-2.5"-DROP6"	2.5"	6"		20000lbs /28000lbs
HSTCB-2.5"-DROP8"	2.5"	8"		
HSTCB-2.5"-DROP10"	2.5"	10"		15000lbs /18500lbs

PARTS LIST




#1.Channel mount x 1



2.Dual ball x 1



3.Security lock x2



4.Plug x 1



5.Hitch pin x1




6.Silencer pad x4

NOTE: #1 photo for reference. For the exact number of holes, please refer to your purchase.


ASSEMBLY & INSTALLATION

Step 1: Please install each part according to the following illustration.

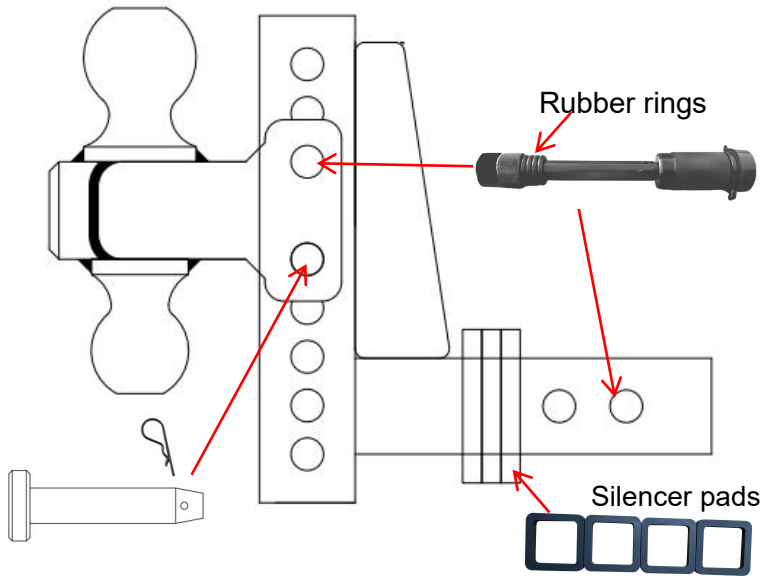

NOTE: The rubber rings/silencer pads are designed to reduce noise. Please install the number of rubber rings as needed.

Step 2: Determine Required Ball Height: Determine the proper ball height by leveling the trailer and measuring from the bottom of the trailer tongue to the ground. See below.

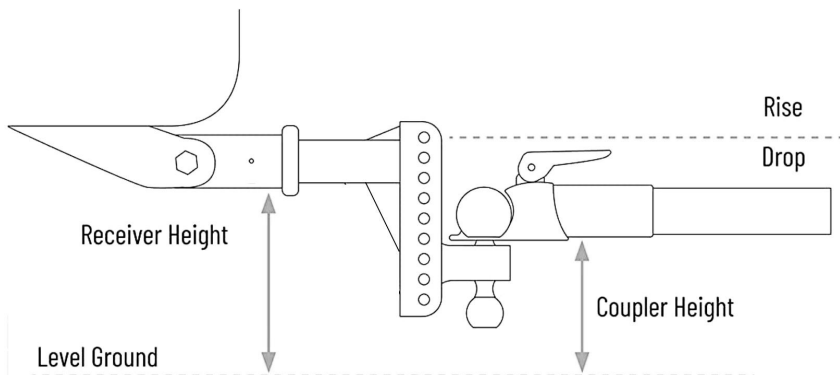

MAINTENANCE

1. Check bolts and safety pins regularly. Inspect all equipment for loose or worn parts before each use and replace or tighten as needed.
2. Do not overload.
3. Please clean up the product at a time when sand or gravel sticks to it.

Manufacturer: Shanghaimuxinmuyeyouxiangongsi

Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 P.R. China

Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australia

Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

UK	REP
----	-----

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX
H2YHUK@gmail.com Tel.: +44 07514-677868

EC	REP
----	-----

E-CrossStu GmbH
Mainzer Landstr.69,60329 Frankfurt am Main.
e-crossstu@outlook.com Tel.: +49 69332967674

