


FL-HA-RACK instruction sheet




Assembly Recommended Tools:

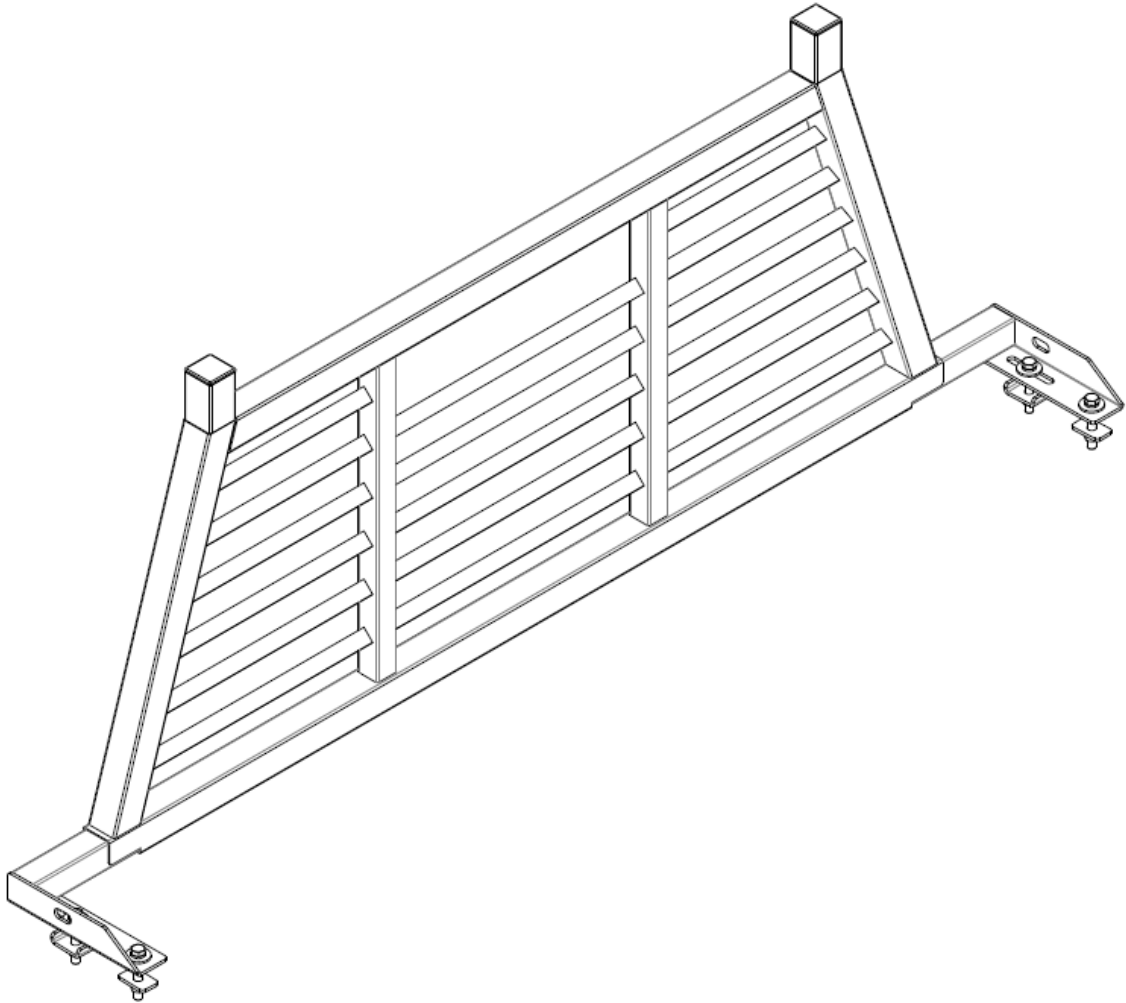

Open Wrench
(1pcs)
Size=19mm

Assembly Diagram

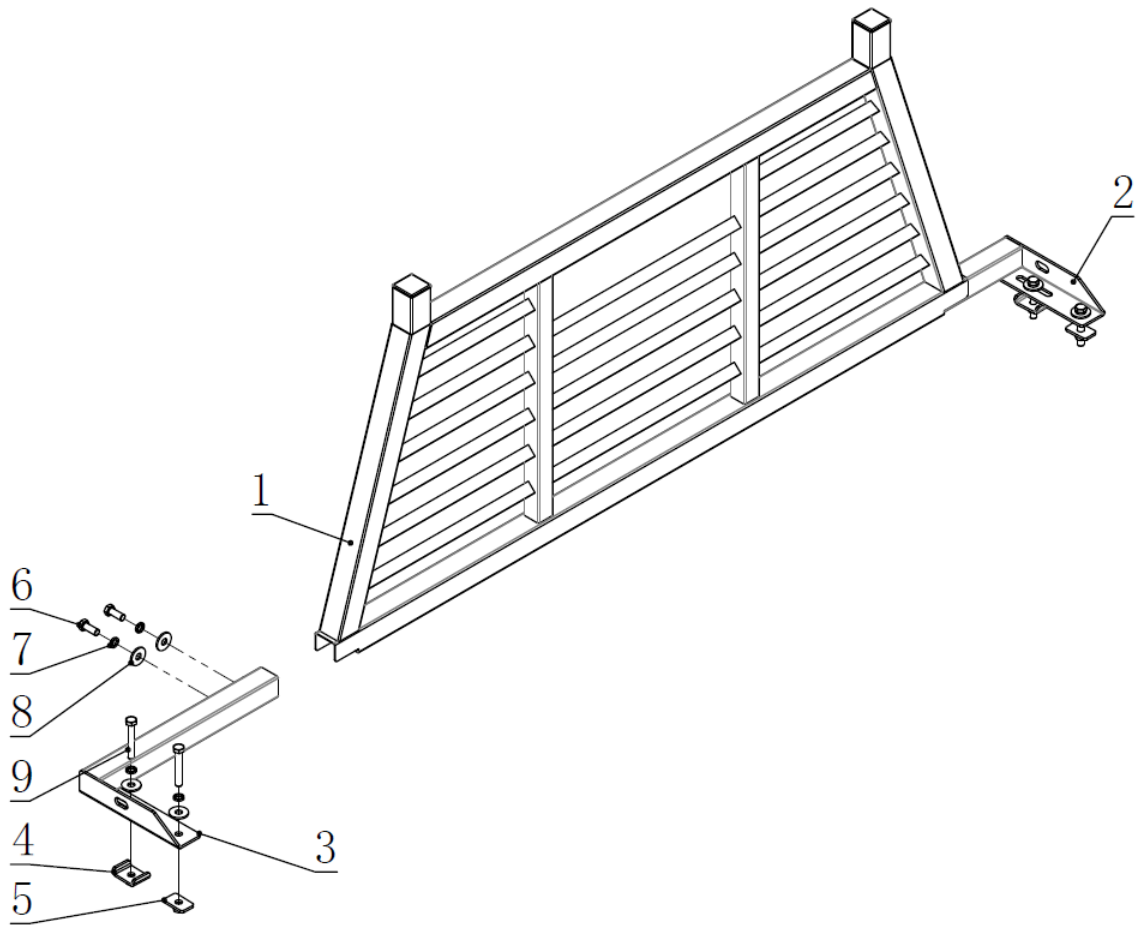


Item#	Description	Quantity	Item#	Description	Quantity
1	frame	1	6	M12x30 outer hexagonal bolt full thread	4
2	right fixed seat	1	7	12 spring pad	8
3	left fixed seat	1	8	12 large flat pad	8
4	U-type mounted plate	2	9	M12x75 external hexagonal bolt full thread	4
5	flat panel mounting plate	2			

Part List

STEP 1. Insert the right fixed seat (2) and the left fixed seat (3) into the frame (1), put the M12x30 outer hexagonal bolt full thread (6) on 12 spring pad (7), 12 large flat pad (8) in turn, through the long hole of the frame screw into the left and right fixed seat threaded hole. A total of 4 bolts according to the same steps. Note: Do not tighten all bolts first.


As shown in Figure 1:

Fig.1

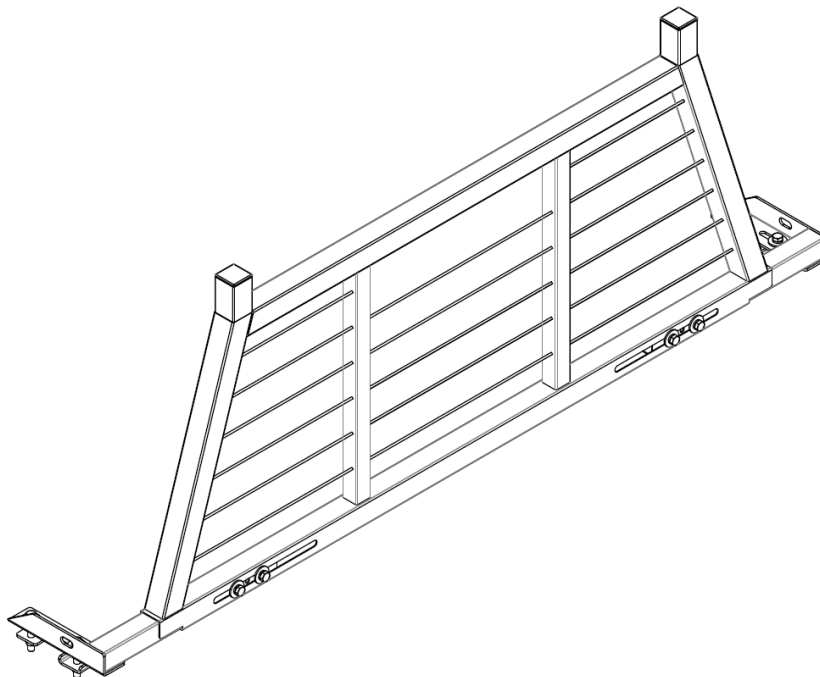

STEP 2. Place the protective frame with the fixed seat on the pickup truck, adjust the distance locking 4 M12x30 outer hexagonal bolts full thread (6), with the M12x75 outer hexagonal bolt full thread (9) into 12 Spring pad (7), 12 large flat pad (8) in turn through the long hole in the fixed seat and the pocket on the pickup rack, screw the U-type mounted plate (4). Left and right side with the same method installation, tightening. As shown in Figure 2:

Fig.2

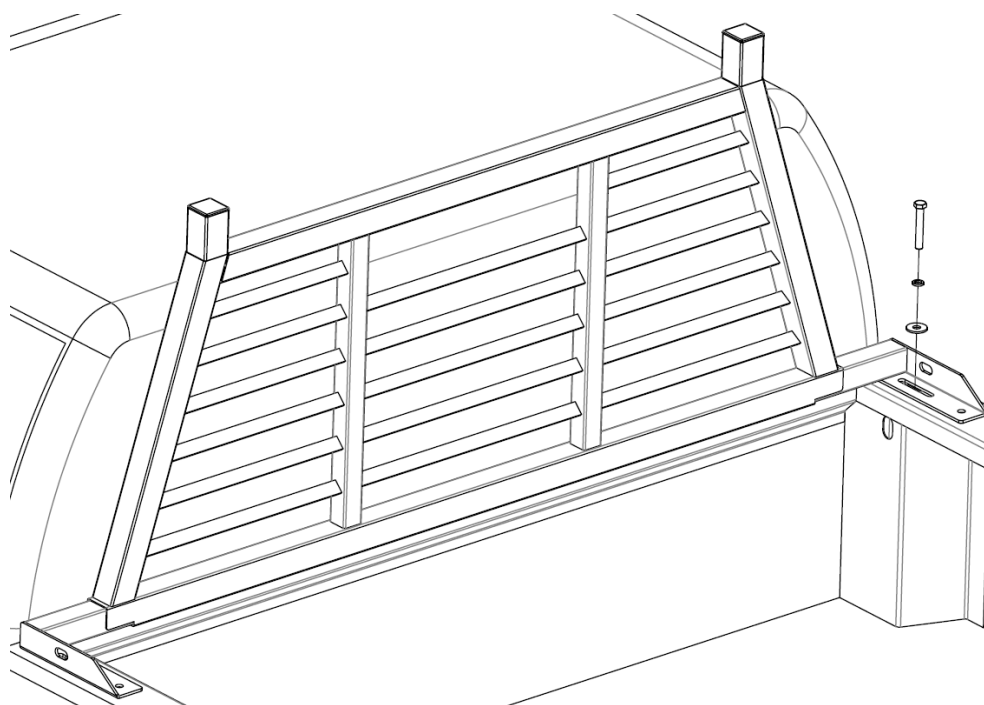

STEP 3. Get through the other hole with a hand electric drill, with the M12x75 external hexagonal bolt full thread (9) into 12 Spring pad (7), 12 large flat pad (8) in turn, through the fixed seat of the round hole and the punch on the pickup rack, screw the flat panel mounting plate (5). Left and right side with the same method installation, tightening. As shown in Figure 3

Fig.3

