Thank you for purchasing our product!

Issues with your order? Give us a chance to make things right.
Do not return this item back to the store. Contact our friendly customer service department with any problems, comments or concerns.
Replacements for missing or damaged parts are shipped within 1 business day.

Email: **Support@AmGoodSupply.com**

Please check out our other products


Stainless Steel Work Tables
Equipment Stands
Stainless Steel Shelves
Commercial & Utility Sinks
Bakery Racks
Hood Filters
Storage Shelving
Utility Carts
Dunnage Rack
Commercial Floor Strainers
Grease Traps


AmGood Supply is a leading manufacturer and distributor of stainless steel and metal products for commercial and residential applications.



Our customers include homeowners, restaurants, retail and manufacturing businesses, non-profits, as well as state, local, and federal government agencies.

WWW.AMGOODSUPPLY.COM

Tubular utility cart assembly instruction

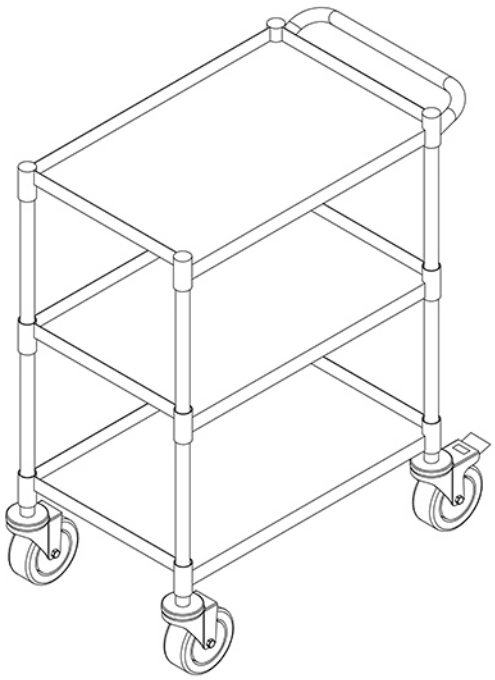


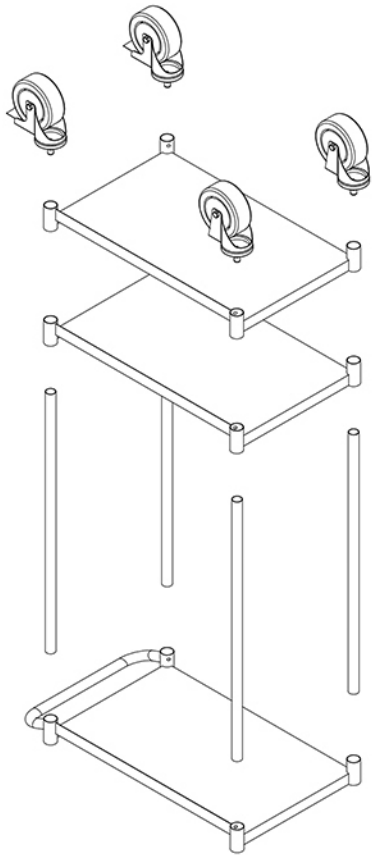


Main Parts			
No.	Pattern	Part name	Quantity
1		Top shelf	1
2		Mid-Shelf & bottom shelf	2
3		Leg tube	4
4		Castor with brake	2
5		Castor without brake	2

Accessories			
No.	Pattern	Part name	Quantity
①		M8*1*10 Screws	13
②		S4 Screw wrench	1


①

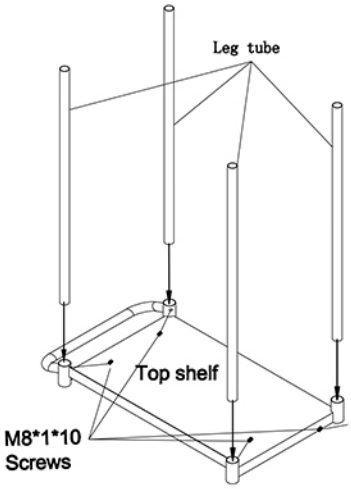


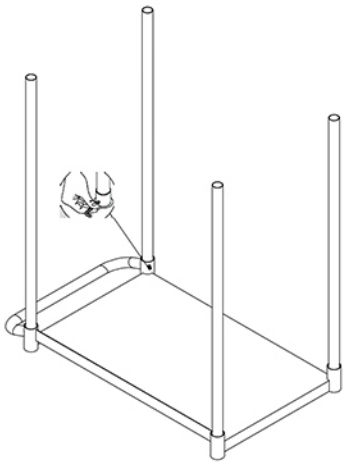

Turn the top shelf unside down onto the floor, place the carton top underneath for padding to aviod scratching, insert the leg tubes into the sockets on the top shelf, fix the leg tube with screws by screw wrench.


②

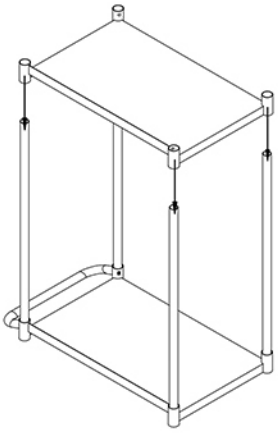


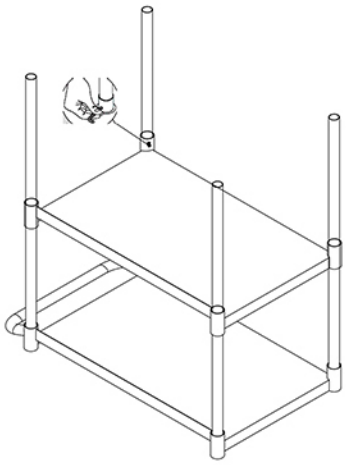

Mark the height position on the leg tube for middle shelf,insert the sockets of middle shelf into the leg tubes, fix the middle shelf with screws


③

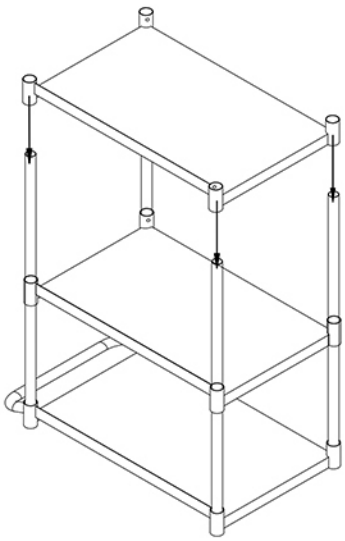


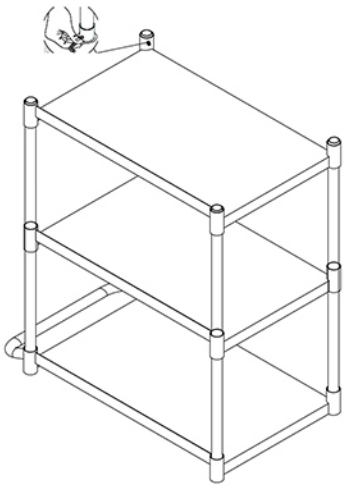


Insert the sockets of bottom shelf into the leg tubes, fix the bottom shelf with screws

④

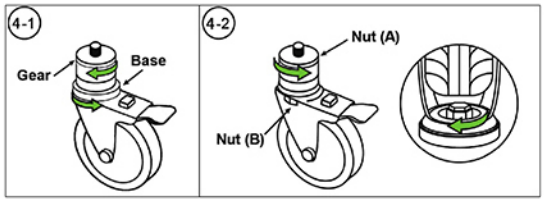


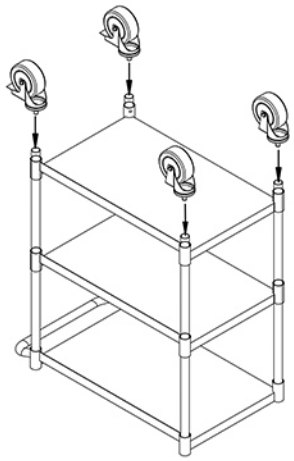

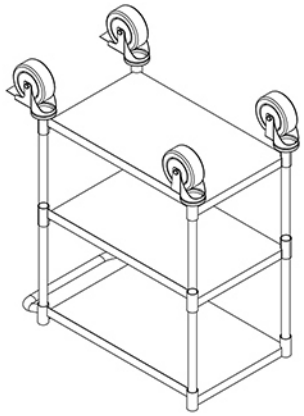

4.1.Grip the base above the caster and rotate the expansion rod so that it is slightly larger than the leg tube
4.2.Insert the castors into the leg tube,castors with brakes face toward handle side，tighten the Nut(B) with a wrench

⑤

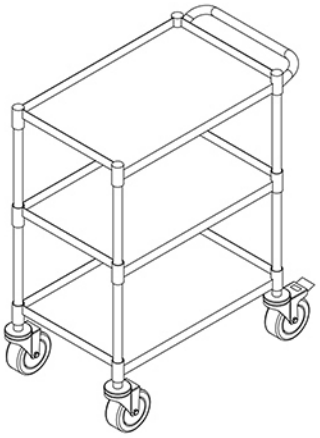

5. Turn over the assembled cart, your cart is now ready to use