

EFSWJ5P

Shallow Well Jet Pump

1/2 HP - 7.5 GPM

APPLICATIONS

- Provide Superior Performance and High Capacities with more Pressure for Shallow Water Wells at 25 Feet

FEATURES

- Dual Voltage- 115/230V (Factory set at 230V)
- Built-in Overload Motor has Corrosin-resistant Nozzle and Venturi
- 1-14" Suction, 1" Discharge
- Motor features Stainless Steel Shaft, Heavy-duty Bearings, Balanced Rotor, Mechanical Seal and Insulated Windings

SPECIFICATIONS


UPC	WARRANTY	WEIGHT	DIMENSIONS (L x W x H)	PALLET QUANTITY
858726005195	1 Year	28.2 Lbs.	24"x 11.4"x 10.24"	24

PERFORMANCE CHART

MODEL	HP	MOTOR VOLTAGE	PRESSURE SWITCH SETTINGS	DISTANCE PUMP ABOVE WATER					PRESSURE SHUT-OFF AT MAX. DEPTH
				5'	10'	15'	20'	25'	
				GALLONS PER MINUTE PUMPED*					
EFSWJ5P	1/2	115/230	30-50	7.5	6.5	5.5	5	3.9	61 PSI

* Performance shown in GPM (gallons per minute) at 40 PSI (pounds per square inch) discharge pressure. (ORDER JET PACKAGE 090JE001* SEPARATELY)

EASY INSTALLATION

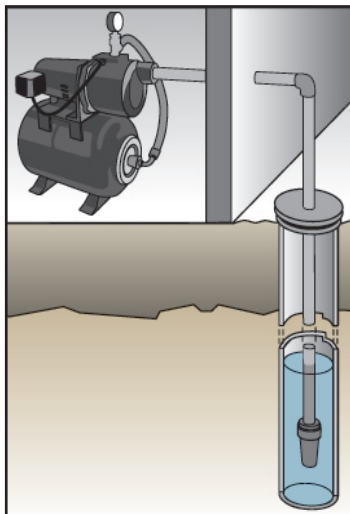

ECO-FLO PRODUCTS INCORPORATED

1899 Cottage Street, Ashland, Ohio 44805 • Customer Service: 1-877 326-3561 • Fax: 1-877 326-1994 • www.ecofloproducts.com