




LED LIGHT SET WITH WIRELESS REMOTE

TRAVELLER[™] LED LIGHT INSTALLATION HARNESS

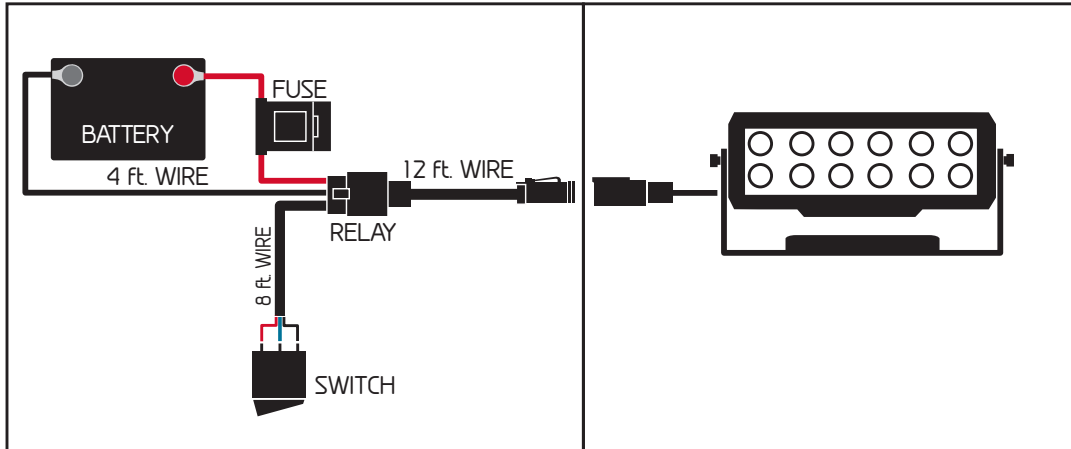

TRAVELLER[™] LED LIGHT INSTALLATION HARNESS

TRAVELLER[™] WIRING SPLITTER (SKU# 1168855, NOT INCLUDED)

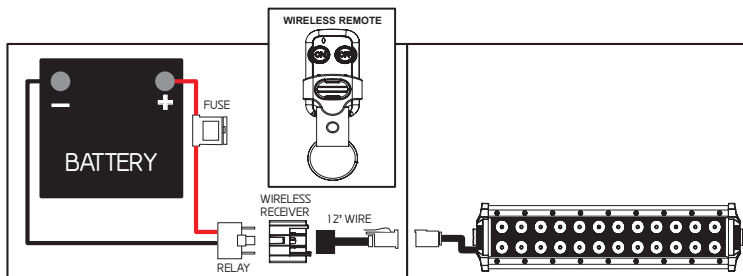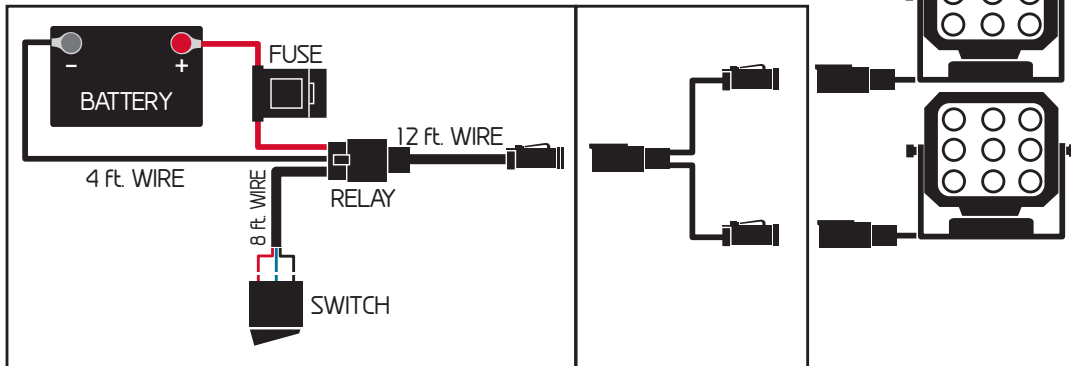

SPECIFICATION:

Cable gauge from Relay to connector is 12ft 16AWG.
Cable gauge from Relay to battery terminal is 4ft 14AWG.
Cable gauge from Switch to relay is 8ft 20AWG.
Remote range to 49 ft.
Heat limits of wire sheathing: -40°C ~ 105°C / -40F~221F.

Content:

Wireless remote x1
40Amp Relay x1
Fuse Holder x1
Stainless Push Button Switch x1
24 ft. wiring & one male Connector x1
User Manual x1

INTENDED USE

This LED light installation set with wireless remote is designed to be used for operating lights, that are typically used on work or off-road vehicles (trucks, jeeps, ATV/UTV, boats, heavy equipment, farm equipment, etc.). The remote works on 12V DC.


Please note that the remote control can be clipped onto a visor, or stored conveniently within the vehicle for easy access. It uses 2pcs CR2032 button cell batteries that are supplied with the kit.

Remote has a range up to 49 ft.

INSTALL THE REMOTE

Step 1: Unplug the relay of the wiring installation kit into 2 parts: ① & ③.

Step 2: Plug the remote receiver ② into the relay as shown below.

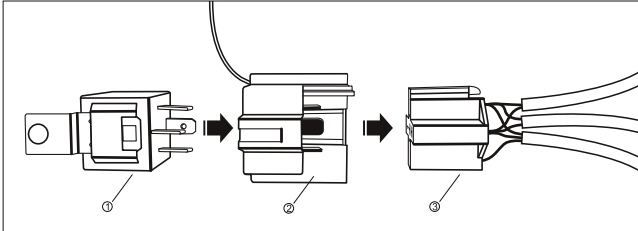


Step 3: 1. Connect (A) terminal with battery, Red wiring to positive. Black wiring to negative.

2. Male connector (B) connects to light or Y Splitter (D).

3. Mount the provided or upgrade switch option to the dashboard by drilling a 19MM hole in your preferred area.

WARNING: Avoid steering columns, gas pedal and linkages, brake pedal and linkages and hot or moving components under the hood such as exhaust parts or engine accessories and belts/fans.

4. Open the fuse hold and put the proper fuse before use.

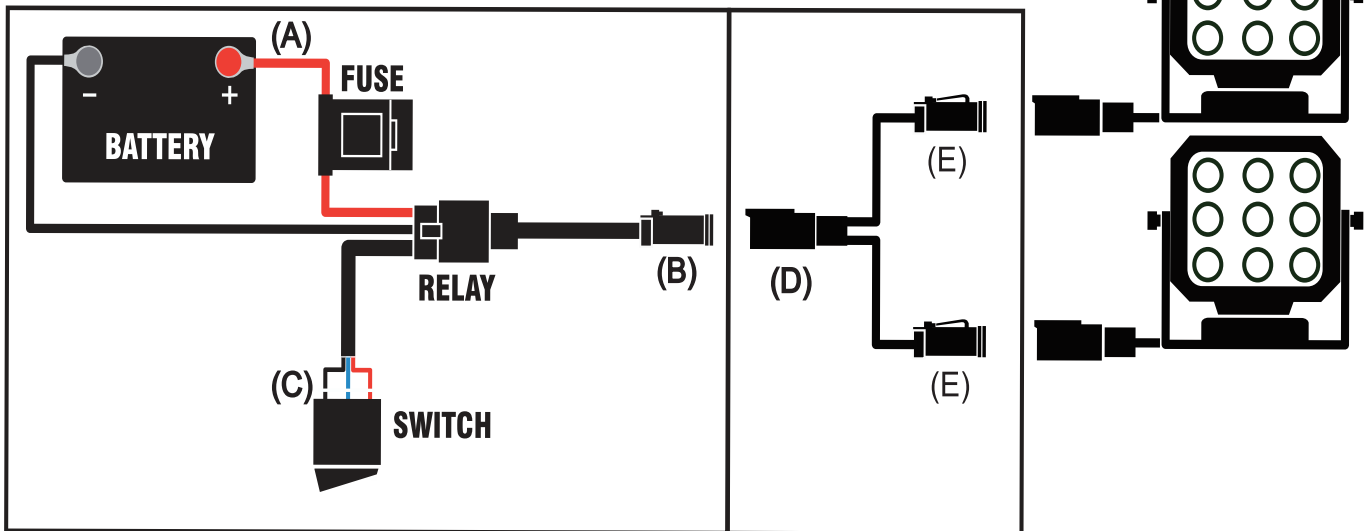

Step 4: Press the button on remote to control the light on/off.



1645624

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Statement

Model No.: 1292701

FCC ID: 2AVYD1292701

Frequency : 433MHZ

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Distributed by:
TRACTOR SUPPLY COMPANY
5401 VIRGINIA WAY
BRENTWOOD, TN 37027
For customer support,
Call: 1-888-376-9601
www.TractorSupply.com
MADE IN CHINA