


TOMAHAWK

www.tomahawk-power.com

TGS30: Assembly Guide Pt. 1




1 Remove all parts from the TGS30 Granular Spreader Box.

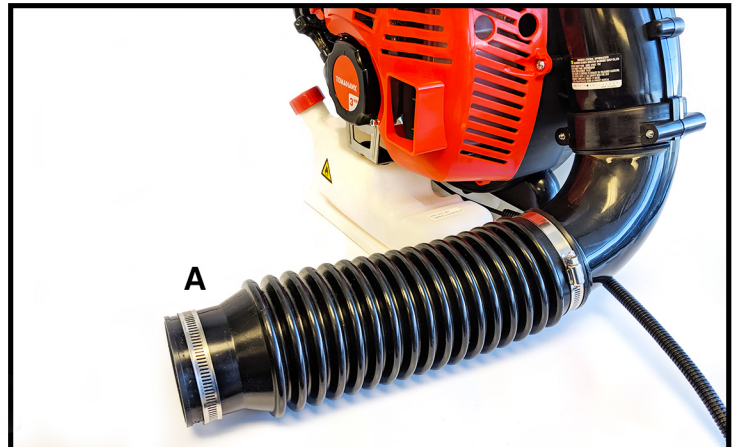


2 Attach the ribbed tube (A) to the granular spreader's elbow.



3 Fasten the clamp on the ribbed tube (A) to the elbow with a screwdriver.

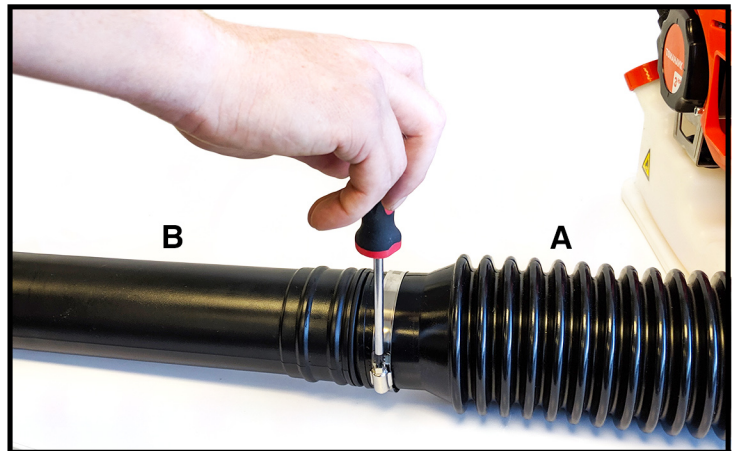

4 Fasten the second clamp on the ribbed tube (A) to the straight tube (B).

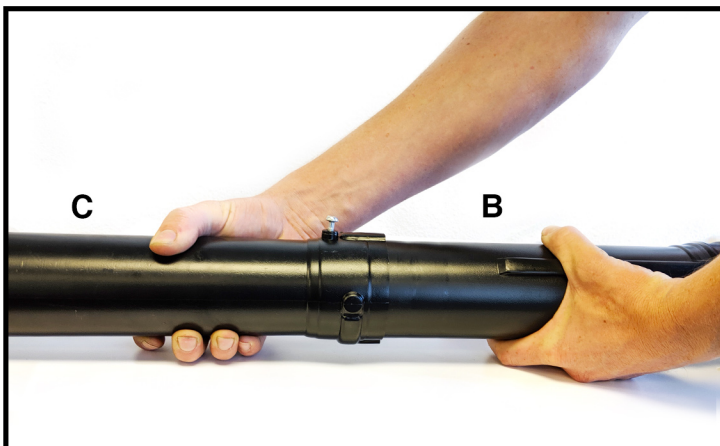

5 Fasten the straight tube (B) to tube (C). Twist to lock.




6 Tighten the screw with a screwdriver to fasten both tubes together.

TOMAHAWK

www.tomahawk-power.com


TGS30: Assembly Guide Pt. 2

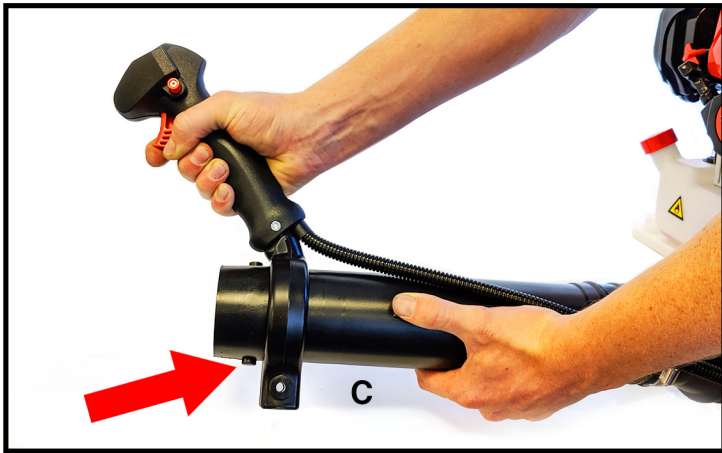


1 Slide the accelerator handle over the tube (C). Adjust to your ideal position.




2 Fasten the accelerator handle to the tube (C) with the wingnut washer.

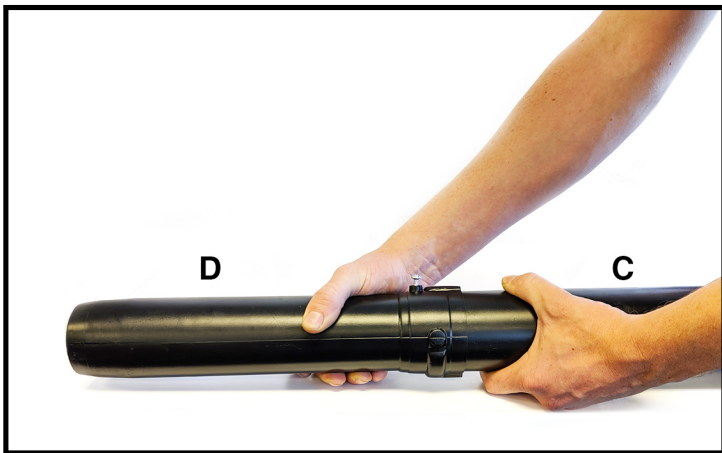


3 Fasten tube (C) to tube (D) and tighten.

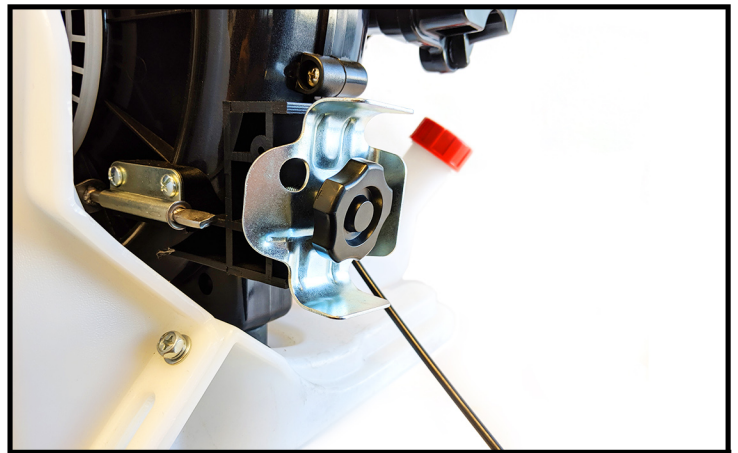

4 Locate the throttle assembly.

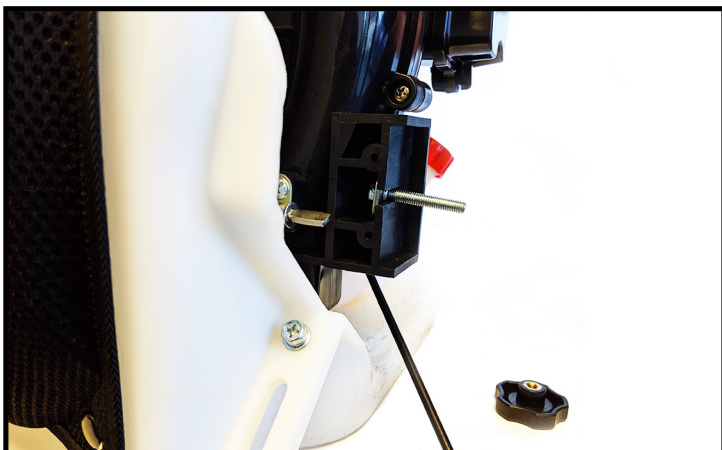

5 Loosen the screw washer.

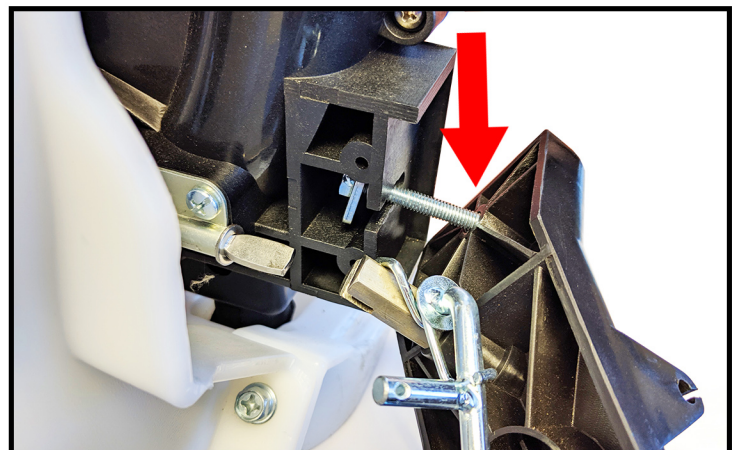


6 Push the screw through the throttle assembly hole.


TOMAHAWK

www.tomahawk-power.com


TGS30: Assembly Guide Pt. 3

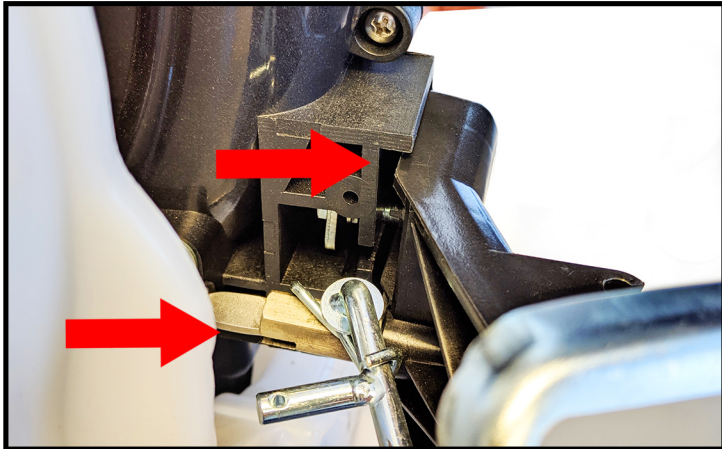


1 Align the throttle assembly's slot into place and line up the housing.

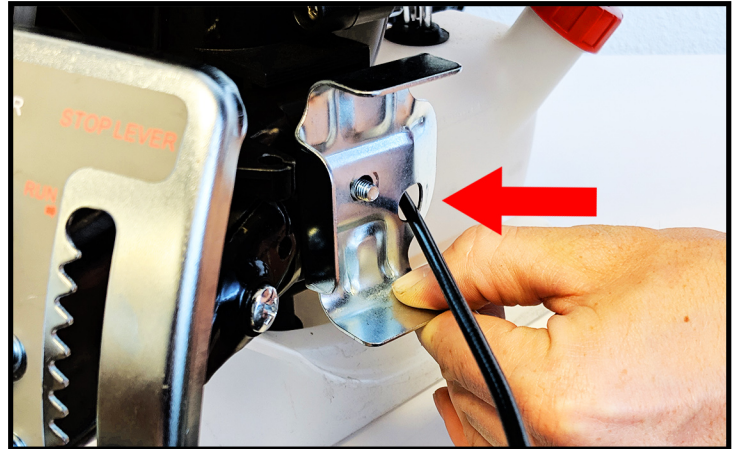


2 Thread the accelerator cable through the metal hole and fasten the screw washer.

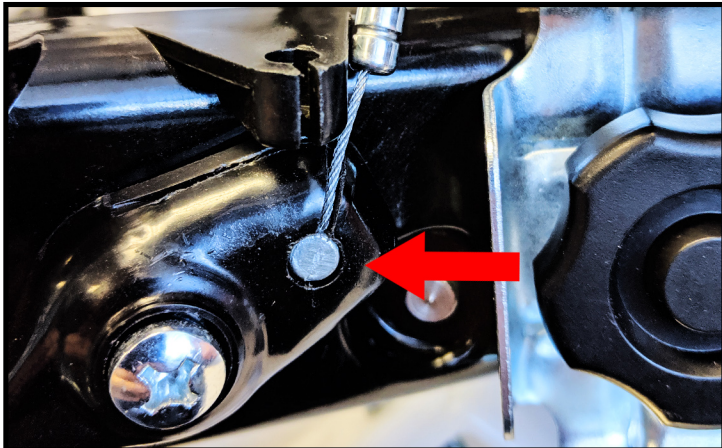


3 Press the accelerator cable's end into slot above.

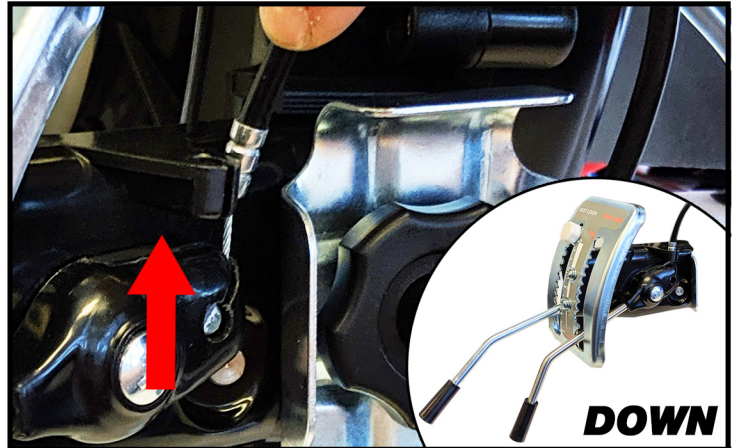

4 Move the throttle down to lock the accelerator cable into the channel.

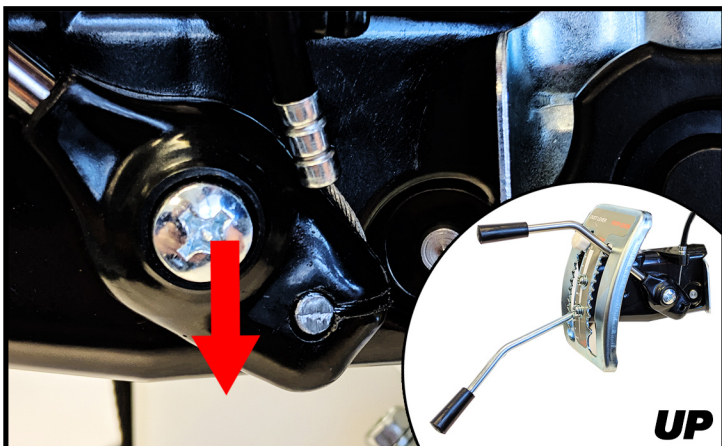

5 Move the throttle up to lock the accelerator cable into the upper channel.

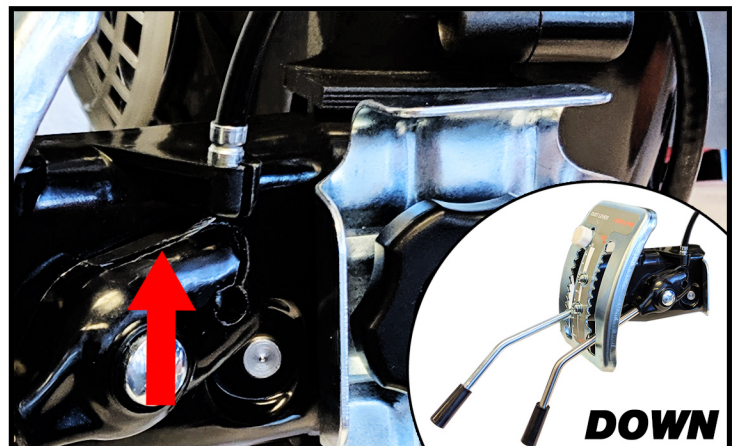

6 Move the throttle down again to lock the accelerator cable into the last channel.