

MINI GREEN RECHARGEABLE LASER

ITEM: GRN-OSP-GLRRE

INSTRUCTIONS

This minigreen rechargeable laser is designed to mount directly to your firearm. This unit will not replace other sighting devices related with accuracy, but it will aid in locating your target with ease. This unit can be mounted easily on 1 inch rail of any configuration that you choose.

WARNING:

Before handling the unit, read and understand the contents of this manual.

·NEVER point the illuminator directly at, or into, an eye. This may cause damage to the eye, or blindness. The illuminator produces enough light to identify an individual without direct illumination to the face.

·Avoid looking directly into the illuminator's beam.

·Avoid shining the illuminator into mirrors or other reflective surfaces.

·Avoid hitting or dropping the unit.

·The illuminator should be tested during periods of non-use to make sure it is still operating properly.

·NEVER allow children to use or handle this product.

·CAUTION: Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Failure to follow the above warnings, is dangerous and may result in serious injury or damage to property.

DANGER: AVOID DIRECT EYE EXPOSURE TO LASER BEAM. LASER RADIATION IS EMITTED FROM THE APERTURE.

Note: If you are not sure about any of the procedures in this manual, pls always seek the help of a qualified professional to

avoid the damage of your laser sight and your firearm.

CAUTION: BEFORE INSTALLATION OF YOUR LASER SIGHT, BE SURE THAT THE GUN IS UNLOADED. ALWAYS PRACTICE SAFE GUN HANDLING PROCEDURES.

Statement:

The product has been carefully checked and tested in our factory, please check carefully whether the product appearance is damaged caused by transport and whether the accessories are complete before using the product. The accessories include: 1.Magnetic and USB Recharge wire; 2.1.5mm Allen wrench; 3.2.5mmAllen wrench; 4.Special wrench; 5.Instruction manual .

Note: Always be sure to turn off this laser sight after use to avoid draining the battery. When the product is not used for a long time, please remove the battery.

Maintenance:

If this product is used in an environment with more dust, vapor and smoke, which leads to the lowering of beam quality, it is recommended to gently wipe the lens of optical port by using a clean and soft cloth or lens cleaning paper in a timely manner. Unless a professional, no wiping with any solvents is allowed, so as to avoid product light quality degradation caused by the lowering of lens quality.

Specifications:

·Model: GRN-OSP-GLRRE

·Brand Name: Osprey Global

·Output power: <5mW ·Wavelength:505-535nm

·Class IIIA laser product

·Voltage:5V 1A max input (computer USB Output application)

·Source type: rechargeable battery

·Working Temperature:-20℃ ~ +60℃

·Storage Temperature:-20℃ ~ +60℃

·Three modes: (1)green laser is always on;

(2)green laser is flashing;

(3)green laser is off.

·Battery life: Around 2hrs (Laser is always on)

·Body Material: Aluminum Alloy in Black color

·Switch: Digital ON/OFF Button only;

·Weight: 1.13oz (Batteries Incl.)

·Size(inch):1.79(L)*1.06(W)*0.85(H)

·Warranty: 1 Year Limited

·Place of Origin: China (Mainland)

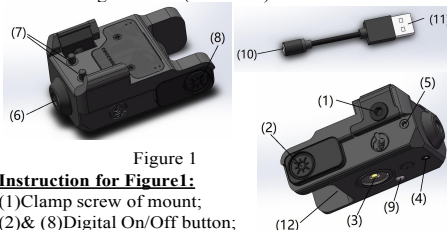


Figure 1

Instruction for Figure1:

(1)Clamp screw of mount;

(2)& (8)Digital On/Off button;

(3)Recharged port (Special Magnetic application);

(4)&(5)Elevation/Windage Adjustment Screw;

(6)Laser beam's aperture; (7)2pcs elastic pins;

(9)Charged display LED;

(10)&(11)Magnetic and USB Recharge wire

(12)Rechargeable battery cover

PS: There are 2pcs elastic pins(7), the purpose is to keep laser from moving when firing, these 2pcs elastic pins(7) will slide into the groove of the pistol rail automatically, The locking mechanism of the present invention, with resiliently biased slider jam 7 can solve this problem, allowing the user to mount the sight anywhere on the gun rail, making it easier for the user to open or switch the overall effect of the sight.

OPERATION:

This unit comes with built-in mount that can fit standard and compact/subcompact pistols with bottom 1 inch rail. Release the clamp screw, slide the laser anywhere onto the pistol rail, fasten the screw again, please do not fasten it too tight.

This unit is packed with 1pcs of USB charging cable. Make sure magnetic charger fully attach to the charging port of laser body. The LED(9) turns and stays on red when charging.

When fully charged, the red LED(9) turns off. The battery is fully charged in the factory. The LED(9) May quickly turn off when charging for the first time. If the USB output voltage of your computer or power adapter is low, the Red LED may not turn off when fully charged, but the battery will be full in maximum 1.5 hours.

Press the ON/OFF button to control laser mode cycle: Always ON-Flashing-OFF.

ZEROING:

Use supplied Allen wrench to adjust the windage and elevation.

SPECIAL NOTE: THIS UNIT WILL ONLY WORK UNDER THE TEMPERATURES LISTED ABOVE. THE UNIT WILL NOT WORK IN EXTREME COLD OR EXTREME HEAT.

CAUTION - LASER LIGHT IS BRIGHT AND BLINDING - DO NOT SHINE AT AIRCRAFT OR VEHICLES AT ANY DISTANCE.

Replace the battery: Because the battery is charged about 500~1000times, if you need to replace the battery, please unscrew the battery cover (12) and reload the new battery.

