



POWERING YOUR *life.*

Model 201469

UPC 817198028132

Warranty 3 Years

5500
STARTING WATTS
Propane: 5500

4000
RUNNING WATTS
Propane: 3600

RUN TIME 11 hrs. **RUN TIME** 21 hrs. **NOISE LEVEL** 61 dBA

ELECTRIC START
Push-button start includes **BATTERY**


EZ START DIAL
Confusion free **ENGINE START-UP**

INTELLI GAUGE
5-MODE display

ULTRA QUIET
LOW NOISE - high performance

RV READY
Power an **RV AIR CONDITIONER**

Receptacles

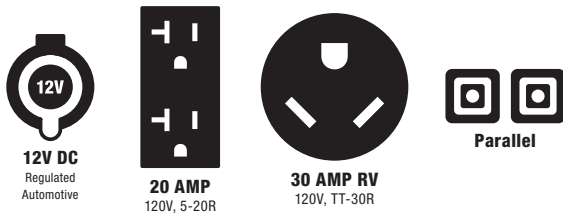

Specifications

START TYPE	Electric, Recoil
VOLTAGE (V) AC [DC]	120 [12]
VOLTMETER	Intelligauge w/ Power Meter
ENGINE SIZE (cc)	224
FUEL TYPE	Gasoline
GASOLINE CAPACITY (gal.)	2.25
OIL TYPE	10W-30
OIL CAPACITY (fl. oz./mL)	16.9/500
LOW OIL SHUT-OFF	Yes
EMISSIONS	EPA III



CARBON MONOXIDE AUTO-SHUTOFF



Our 5500-watt dual fuel inverter generator features CO Shield®, the Carbon Monoxide auto shutoff system. The 224cc engine runs for up to 11 hours on gasoline or up to 21 hours with a 20-lb propane tank plus you can increase your power with the optional Parallel Kit.

Inside the box

- GENERATOR
- BATTERY
- ENGINE OIL
- OIL FUNNEL
- WRENCH
- PROPANE HOSE 6 FT.
- SPARK PLUG WRENCH
- REVERSIBLE PHILLIPS/FLATHEAD SCREWDRIVER
- OPERATOR'S MANUAL

What You Need

GASOLINE OR PROPANE

*Specifications, descriptions and illustrations are subject to change without notice.

PACKAGE (gross)
Weight: 114.7 lb.
Size: 27.8 x 20.9 x 23.4 in.

PRODUCT (net)
Weight: 104.7 lb.
Size: 23.5 x 18 x 20.1 in.