

# EFSWJ10

## Shallow Well Jet Pump

### 1 HP - 13.6 GPM

#### APPLICATIONS

- Provide Superior Performance and High Capacities with more Pressure for Shallow Water Wells at 25 Feet

#### FEATURES

- Dual Voltage- 115/230V (Factory set at 230V)
- Built-in Overload Motor has Corrosion-resistant Nozzle and Venturi
- 1-1/4" Suction, 1" Discharge
- Motor features Stainless Steel Shaft, Heavy-duty Bearings, Balanced Rotor, Mechanical Seal and Insulated Windings

#### SPECIFICATIONS


UPC	WARRANTY	WEIGHT	DIMENSIONS (L x W x H)	PALLET QUANTITY
856594003657	2 Year	41 Lbs.	21.3"x11.2"x12.6"	21

#### PERFORMANCE CHART

MODEL	HP	MOTOR VOLTAGE	PRESSURE SWITCH SETTINGS	DISTANCE PUMP ABOVE WATER					PRESSURE SHUT-OFF AT MAX. DEPTH
				5'	10'	15'	20'	25'	
				GALLONS PER MINUTE PUMPED*					
EFSWJ10	1	115/230	30-50	13.6	11.8	10.5	9.6	8.7	67 PSI

\* Performance shown in GPM (gallons per minute) at 40 PSI (pounds per square inch) discharge pressure. (ORDER JET PACKAGE 090JE001 \* SEPARATELY)

#### EASY INSTALLATION

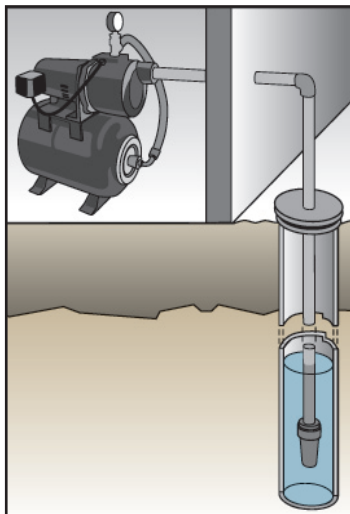

**ECO-FLO PRODUCTS INCORPORATED**

1899 Cottage Street, Ashland, Ohio 44805 • Customer Service: 1-877 326-3561 • Fax: 1-877 326-1994 • [www.ecofloproducts.com](http://www.ecofloproducts.com)