

TENAX®

SOLUTIONS ALL AROUND YOU

BEACON PLUS SAFETY FENCE

MÁS CERCA BEACON SEGURIDAD / CLÔTURE DE SÉCURITÉ, BEACON PLUS



RECOMMENDED USES

Safety fence for use on construction sites, parking lots and warehouses.

Spanish: Malla de seguridad para uso en obras de construcción, estacionamientos y bodega.

French: Clôture de sécurité pour une utilisation sur les chantiers de construction, les parcs de stationnement et les entrepôts.

Safety fence for use around hazardous areas, traffic or pedestrian areas.

Spanish: Malla de seguridad para uso alrededor de áreas peligrosas, con tráfico o zonas peatonales.

French: Clôture de sécurité pour une utilisation autour de zones dangereuses, de trafic ou dans des zones piétonnes.

Reusable visual barrier for property delineation or home construction.

Spanish: Barrera visual reutilizable para la delimitación de propiedad o la construcción de viviendas.

French: Barrière visuelle réutilisable pour la délimitation de la propriété ou la construction de la maison.



4-FT x 50-FT

1.21-M x 15.24-M

MESH SIZE 3.5-IN x 2-IN

Spanish: tamaño de malla 8.89-CM x 5-CM / **French:** maillage 8.89-CM x 5-CM


ORANGE / NARANJA / ORANGE

Scan the code for instructions.
Spanish: Lea el código para obtener instrucciones.
French: Scannez le code pour les instructions.

Toolkit

YOU MAY NEED

posts
 mallet
 fence ties
 wood slat

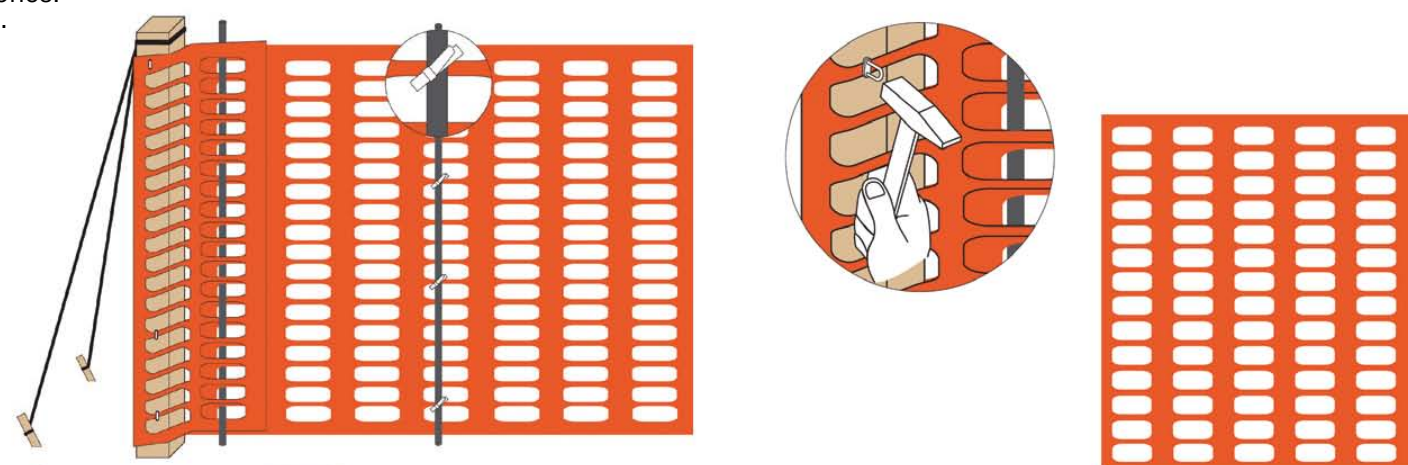

INSTRUCTIONS

(1) Your Tenax fencing can be installed using metal or fiberglass posts. (2) If installing a 4 foot fence, use a post that is 5-6 feet tall. (3) Drive at least 1 foot of post into the ground using a mallet. (4) One post should be placed every 8-10 feet. (5) Fence should be stretched across posts and attached using 3 fence ties securing the fence at the top, middle, and bottom of each post. (6) To connect fence sections, overlap two ends and weave a wood slat through the overlapped strands, secure the slat with fence ties. For additional strength secure the joined area to a post.



TENAX CORPORATION
 4800 E. Monument Street / Baltimore, MD 21205
 phone 410-522-7000 / fax 410-522-3190 / www.tenaxus.com