

# TENAX<sup>®</sup>

SOLUTIONS ALL AROUND YOU

## BEACON PLUS SAFETY FENCE

MÁS CERCA BEACON SEGURIDAD / CLÔTURE DE SÉCURITÉ, BEACON PLUS



**RECOMMENDED USES**  
**Safety fence for use on construction sites, parking lots and warehouses.**  
**Spanish:** Malla de seguridad para uso en obras de construcción, estacionamientos y bodega.  
**French:** Clôture de sécurité pour une utilisation sur les chantiers de construction, les parcs de stationnement et les entrepôts.

**Safety fence for use around hazardous areas, traffic or pedestrian areas.**  
**Spanish:** Malla de seguridad para uso alrededor de áreas peligrosas, con tráfico o zonas peatonales.  
**French:** Clôture de sécurité pour une utilisation autour de zones dangereuses, de trafic ou dans des zones piétonnes.

**Reusable visual barrier for property delineation or home construction.**  
**Spanish:** Barrera visual reutilizable para la delimitación de propiedad o la construcción de viviendas.  
**French:** Barrière visuelle réutilisable pour la délimitation de la propriété ou la construction de la maison.



# 4-FT x 100-FT

## 1.21-M x 30.48-M

MESH SIZE 3.5-IN x 2-IN

Spanish: tamaño de malla 8.89-CM x 5-CM / French: maillage 8.89-CM x 5-CM


ORANGE / NARANJA / ORANGE

Scan the code for instructions.  
 Spanish: Lea el código para obtener instrucciones.  
 French: Scannez le code pour les instructions.

**Toolkit**

**YOU MAY NEED**

posts  
 mallet  
 fence ties  
 wood slat

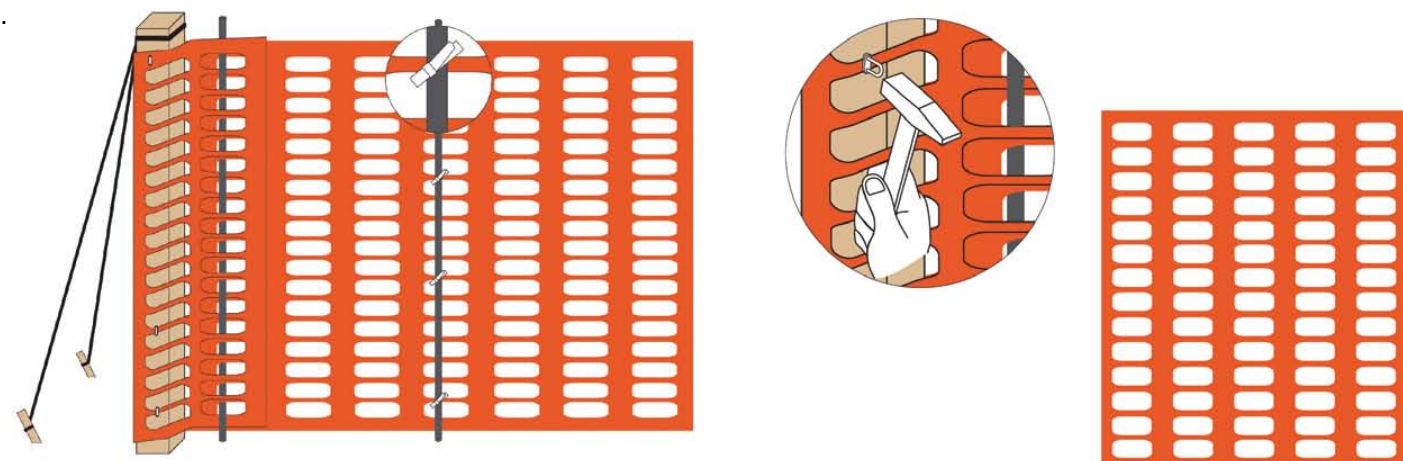

### INSTRUCTIONS

(1) Your Tenax fencing can be installed using metal or fiberglass posts. (2) If installing a 4 foot fence, use a post that is 5-6 feet tall. (3) Drive at least 1 foot of post into the ground using a mallet. (4) One post should be placed every 8-10 feet. (5) Fence should be stretched across posts and attached using 3 fence ties securing the fence at the top, middle, and bottom of each post. (6) To connect fence sections, overlap two ends and weave a wood slat through the overlapped strands, secure the slat with fence ties. For additional strength secure the joined area to a post.



**TENAX CORPORATION**  
 4800 E. Monument Street / Baltimore, MD 21205  
 phone 410-522-7000 / fax 410-522-3190 / [www.tenaxus.com](http://www.tenaxus.com)