

DK2 USA WEST 4301 S Valley View Blvd, Suite 10-11, Las Vegas, Nevada, 89103, United States DK2 CANADA 1080 Clay Avenue, Unit 2, Burlington, Ontario, L7L 0A1 , Canada DK2 USA EAST 3750 South Avenue, North Unit, Toledo, Ohio 43615, United States



DK2 is a leading manufacturer of power products and automotive accessory items. Our line has expanded into 5 categories of products; Snow Plows, Trailers, Winches, Auto Accessories, and Power Products.

We believe in providing quality first and are focused on delivering our products to our customers on time and in accordance with their ever changing needs.

We believe that our business can - and should - have a positive impact on the communities we serve.

With Distribution Centres in both Canada and the US, we service a wide range of wholesale and retail channels by maintaining our commitment of providing products that are designed and created with high ethical standards.

# LIMITED 1 YEAR WARRANTY

#### WHAT IS COVERED

DK2 Inc. warrants to the original purchaser of any DK2 product that it will be free and clear of manufacturing defects in workmanship and materials under normal use and service for a period of one (1) year from the date of the original purchase.

If within one (1) year from the original date of purchase this product fails due to defect in material or workmanship, Detail K2 will repair, replace, or supply any defective part at our option. Upon expiry of one (1) year, Detail K2 will have no further liability related to the product. Detail K2 does not authorize any party, including its authorized distributors or dealers, to offer any other warranty on behalf of Detail K2 Inc.

#### THIS WARRANTY DOES NOT COVER OR APPLY TO:

- (a) Damage to the product due to misuse, mishandling and abuse
- (b) Improper installation, maintenance and storage
- (c) Expendable parts such as nuts and bolts, pins and springs
- (d) Normal wear and tear
- (e) Consequential damage & incidental damages such as damage to persons or property

#### PROCEDURE FOR OBTAINING A RETURN AUTHORIZATION

Within the one (1) year warranty period, the purchaser of the product must notify an authorized distributor or dealer of the claimed defect and provide proof of original purchase. At this time the validity of the claim will be determined and a Return Goods Authorization Number (RGA) will be issued if approved. No returned product will be accepted under warranty unless accompanied by an RGA# issued by Detail K2 Inc.

#### **RESOLUTION FOR A DEFECTIVE PRODUCT**

Detail K2 Inc. will at its option repair or replace the defective product covered by this warranty. The repaired product will be shipped to the purchaser upon completion. All transportation charges shall be the responsibility of the purchaser. Any damage in transit will be the responsibility of the carrier or at the risk of the purchaser.







**DK2 TRAILERS** 

Utility Trailers Landscape Trailers

**PAGES: 4-10** 



#### **DK2 POWER**

Stump Grinders Wood Chippers Log Splitters Trenchers

**PAGES: 11-23** 



#### **DK2 SNOW PLOWS**

Snow Plows - Hydraulic Snow Plows - Universal Mount Snow Plows - Custom Mount

**PAGES: 24-29** 



#### **DK2 AUTO ACCESSORIES**

Bike Carriers Cargo Carriers Truck Rack Motorcycle Carrier Battery Boosters

**PAGES: 30-38** 



#### **DK2 WARRIOR WINCHES**

Winches - Electric Winches - Hydraulic Winch Accessories

**PAGES: 39-53** 





The single axle multi-utility trailer from DK2 is one of the most versatile trailer on the market. Sitting on a solid square tube cambered axle with 30.5 cm (12 in.) 6 ply bias tires, and a load capacity of 1,639 lb (743.4kg). When the front and back load-bearing gates are down, the trailer bed extends to nearly 3.5 m (11.58 ft.). Another great feature is the tilt/dump capability that makes it easy to load or unload heavy items. Fabricated from 100% steel, all of the components are reinforced, adjustable, removable and / or interchangeable.

#### **SPECIFICATION**

GVW: 2,090 lb. 948.0 kg Curb weight 451 lb. 204.6 kg Payload capacity 1.639 lb. 743.4 ka

52 x 88 to 52 x 136 inches Bed dimensions 1.32 x 2.24 to 1.32 x 3.45 m

Overall length 177 in. 4.50m tongue extended Floor height 20 in. 50.8 cm

Construction

Fully welded tubular steel frame (hot dipped galvanized available)

Side panels 14 in. H 35.6 cm H Corrugated steel 24 in. H 61 cm H Corrugated Drop gates

Lighting Trailer comes pre wired with quick connect LED lighting. Complies with DOT requirements.

Adjustable rear light protectors and protected

side markers. 2 position

Dump bed Hitch height 16 in. 40.6 cm

Flooring 100% steel corrugated welded reinforced bed

Assembly time 60 minutes approx.

Carton dimensions 88.5 x 55 x 8 inches (DWH) 224.79 x 139.7 x 20.32cm







Item Number: MMT5X7 UPC: 826518003391

- Back drop gate
- 100% Steel
- Heavy duty
- · Best in Class
- · Exclusive Design
- Extended bed length: nearly 12 feet / 3.66 metres.
- 2 position dump bed
- Quick release lock pin
- Load bearing gates
- Removable steel side panels
- · Corrugated steel floor
- 100% welded tubular steel frame
- · Heavy-duty tail light protectors
- Solid square tube cambered axle
- Easy-lube 5 on 4.5 hub assembly
- V tongue for added strength
- 2" coupler with safety chains
- 12 x 5.3 6 ply bias tires









# In UTILITY TRAILER 5 X 7

Item Number: MMT5X7G UPC: 826518004848

#### DESCRIPTION

The new addition to the DK2 trailer line up is the Hot Dipped Galvanized  $5 \times 7$  Utility Trailer. Constructed from 100% steel all the components are reinforced, adjustable, removable or interchangeable. The MMT5X7G is fully welded and hot dipped galvanized to protect the steel from the elements especially in coastal regions. This unit offers the end user excellent value for their money and will dramatically add to the life of the trailer kit. Each trailer ships in a single carton including pre wired LED lighting for easy installation.

#### SPECIFICATION

GVW: 2,090 lb. 948.0 kg Curb weight 451 lb. 204.6 kg Payload capacity 1,639 lb. 743.4 kg

Bed dimensions 52 x 88 to 52 x 136 inches 1.32 x 2.24 to 1.32 x 3.45 m

Overall length 177 in. 4.50m tongue extended

Floor height 20 in. 50.8 cm

Construction Fully welded hot dipped

galvanized tubular steel frame

Side panels 14 in. H 35.6 cm H Corrugated steel

Drop gates 24 in. H 61 cm H Corrugated

Lighting Trailer comes pre wired with quick connect


LED lighting. Complies with DOT requirements. Adjustable rear light protectors and protected side markers

Dump bed 2 position Hitch height 16 in. 40.6 cm

Flooring 100% steel corrugated reinforced bed

Assembly time 60 minutes approx.

Carton dimensions 88.5 x 55 x 8 inches (DWH) 224.79 x 139.7 x 20.32cm (DWH)



- Back drop gate
- 100% Steel
- Heavy duty
- Best in Class
- Extended bed length: nearly 12' / 3.66 metres.
- 2 position dump bed
- Quick release lock pin
- Load bearing gates
- Removable steel side panels
- Corrugated steel floor
- 100% welded tubular steel frame
- Heavy-duty tail light protectors
- Solid square tube cambered axle
- Easy-lube 5 on 4.5 hub assembly
- V tongue for added strength
- 2" coupler with safety chains
- 12 x 5.3 6 ply bias tires









# DANDSCAPE TRAILER 4 X 6

Item Number: MMT4X60 UPC: 826518005623

#### DESCRIPTION

The "little brother" of the best-selling DK2 MMT5X7 is specially designed for handling a variety of hauling tasks. This trailer is the perfect solution for anyone needing to pull a trailer behind a small vehicle, full size truck, law tractor, or ATV.

The trailers are engineered to provide exceptional balance and ease of mobility without giving up one ounce of payload capacity. Every trailer is made from 100% welded tubular steel with expanded steel decks. Our back gate design is multi-purpose and can sit flat in the bed, up in a vertical position, or lying down as a ramp for easy loading.

#### **SPECIFICATION**

GVW: 1,600 lb. 725.7 kg Curb weight 305 lb. 138.3 kg Payload capacity 1,295 lb. 587.4 kg

Bed dimensions 48 x 72 inches (1.21 x 1.82 m) Overall length 152 in. 3.86m tongue extended

Floor height 18 in. 45.7 cm

Construction Fully welded HD tubular steel

Side panels Open Sides

Floating Ramp Gate 36 in. Reinforced square tube steel ramp with

heavy duty round tube exterior

Lighting Trailer comes pre wired with quick connect LED

lighting. Complies with DOT requirements. Adjustable rear light protectors and protected

side markers.

Hitch height 14 in. 35.5 cm

Flooring 100% welded down corrugated steel floor panel



#### DX(/)

- Capacity: 587.4 kg (1,295 lb.)
- Fully welded heavy-duty powder-coated steel frame
- · Corrugated steel floor
- Solid square tube cambered axle
- Drive up rear ramp tailgate
- 2 position dump bed axle mount with quick release lock pin
- Hitch height: 40.6 cm (16 in.)
- Heavy-duty tail light protectors
- LED quick connect lighting with side markers
- Wheel diameter: 12"
- Wheel bolt pattern: 5 on 4-1/2"
- Tire size: 4.80-12
- Load range: C
- · Assembly required
- 2" coupler









Item Number: MMT4X6 UPC: 826518004831

#### **DESCRIPTION**

The "little brother" of the best-selling DK2 MMT5X7 is specially designed for handling a variety of hauling tasks. This trailer is the perfect solution for anyone needing to pull a trailer behind a small vehicle, full size truck, law tractor, or ATV.

The trailers are engineered to provide exceptional balance and ease of mobility without giving up one ounce of payload capacity. Every trailer is made from 100% welded tubular steel with expanded steel decks. Our back gate design is multi-purpose and can sit flat in the bed, up in a vertical position, or lying down as a ramp for easy loading.

#### SPECIFICATION

GVW: 1,600 lb. 725.7 kg Curb weight 305 lb. 138.3 kg Payload capacity 1,295 lb. 587.4 kg

Bed dimensions 48 x 72 inches (1.21 x 1.82 m) Overall length 152 in. 3.86m tongue extended

Floor height 18 in. 45.7 cm

Construction Fully welded HD tubular steel

Side panels Solid Sides

Floating Ramp Gate 36 in. Reinforced square tube steel ramp with

heavy duty round tube exterior


Lighting Trailer comes pre wired with quick connect LED

lighting. Complies with DOT requirements. Adjustable rear light protectors and protected

side markers.

Hitch height 14 in. 35.5 cm

Flooring 100% welded down corrugated steel floor panel



- Capacity: 587.4 kg (1,295 lb.)
- Fully welded heavy-duty powder-coated steel frame
- Corrugated steel floor & solid side and front panels/rails
- Solid square tube cambered axle
- Drive up rear ramp tailgate
- 2 position dump bed axle mount with quick release lock pin
- Hitch height: 40.6 cm (16 in.)
- Heavy-duty tail light protectors
- LED quick connect lighting with side markers
- Wheel diameter: 12"
- Wheel bolt pattern: 5 on 4-1/2"
- Tire size: 4.80-12
- Load range: C
- · Assembly required
- 2" coupler









# FOLDING TRAILER 4 X 8

Item Number: MFT4X8 UPC: 826518005296

#### DESCRIPTION

The trailer you've always needed has arrived with the DK2 MFT 4x8 Folding Trailer Kit.

High-performing, durable and versatile, the DK2 MFT4x8 trailer is ready for work. Built with a patented welded steel frame and deck for added strength and easy assembly, you'll spend less time reading manuals and more time on the road. For increased safety and secure storage, the DK2 MFT is coated with high-performance anti-slip textured UV powder, all while maintaining its complete folding functionality. When it comes to trailers – there's truly nothing like it.

#### **SPECIFICATION**

GVW: Nett weight Payload capacity Bed dimensions

Coupler
Wheel Rim
Tire Size & Type
Tire Air Pressure
Wheel Lug
Torque
Axle
Hub
Overall Dimension

Lighting Material 1720 lb 780.1 kg 262 lb 118.8 kg 1450 lb 657.7 kg 48 x 96 inches 1.2 x 2.4 m 2 inch 5cm 12 x 4 inches 30.4 x 10 cm 5.30-12 6PR 1050lbs 80 PSI cold 5 per rim 85-90 ft/lbs Square Cambered Cast Iron Dia 5.6 inch 14.2 cm 138 x 64 x 24.5 inches

UV powder coated steel

 $3.5 \times 1.6 \times 0.6 \text{ m}$ 

Pre Wired LED

Folds up for easy storage.





- Overall assembled length is 138 inch and overall width is 64 inch.
- Payload capacity is 1450 lbs. with a 1720-lb. max. GVWR
- Includes two 5.3 -12 inch tires, pre wired led light kit with flat 4-wire harness and connector, safety chain with S-hook, and 2 inch coupler.
- Certificate of origin for registering and licensing is included.



# DANDSCAPE TRAILER 5 X 7

Item Number: MMT5X7-DUG UPC: 826518005296

#### **DESCRIPTION**

The single axle multi-utility trailer from DK2 is one of the most versatile trailer on the market. Sitting on a solid square tube cambered axle with 30.5 cm (12 in.) 6 ply bias tires, and a load capacity of 1,639 lb (743.4kg). When the front and back load-bearing gates are down, the trailer bed extends to nearly 3.5 m (11.58 ft.). Another great feature is the tilt/dump capability that makes it easy to load or unload heavy items. Fabricated from 100% steel, all of the components are reinforced, adjustable, removable and / or interchangeable.

#### **SPECIFICATION**

GVW: 2,090 lb. 948.0 kg Curb weight 451 lb. 204.6 kg Payload capacity 1,639 lb. 743.4 kg

Bed dimensions 52 x 88 to 52 x 136 inches 1.32 x 2.24 to 1.32 x 3.45 m

Overall length 177 in. 4.50m tongue extended

Floor height 20 in. 50.8 cm

Construction Fully welded tubular steel frame (hot dipped galvanized available)
Side panels 14 in. H 35.6 cm H Corrugated steel

Drop gates 24 in. H 61 cm H Corrugated Lighting Trailer comes pre wired with

Trailer comes pre wired with quick connect LED lighting. Complies with DOT requirements.

Adjustable rear light protectors and protected


Adjustable rear light protectors and side markers.

Dump bed 2 position Hitch height 16 in. 40.6 cm

Flooring 100% steel corrugated welded reinforced bed

Assembly time 60 minutes approx.

Carton dimensions 88.5 x 55 x 8 inches (DWH) 224.79 x 139.7 x 20.32cm



- Back drop gate
- 100% Steel
- Heavy duty
- Best in ClassExclusive Design
- Extended bed length: nearly 12 feet / 3.66 metres.
- 2 position dump bed
- · Quick release lock pin
- Load bearing gates
- · Removable steel side panels
- Corrugated steel floor
- 100% welded tubular steel frame
- Heavy-duty tail light protectors
- Solid square tube cambered axle
- Easy-lube 5 on 4.5 hub assembly
- V tongue for added strength
- 2" coupler with safety chains
- 12 x 5.3 6 ply bias tires











# DANDSCAPE TRAILER 5 X 7

Item Number: MMT5X7G-DUG UPC: 826518005302

#### DESCRIPTION

The new addition to the DK2 trailer line up is the Hot Dipped Galvanized  $5 \times 7$  Utility Trailer. Constructed from 100% steel all the components are reinforced, adjustable, removable or interchangeable. The MMT5X7G is fully welded and hot dipped galvanized to protect the steel from the elements especially in coastal regions. This unit offers the end user excellent value for their money and will dramatically add to the life of the trailer kit. Each trailer ships in a single carton including pre wired LED lighting for easy installation.

#### SPECIFICATION

GVW: 2,090 lb. 948.0 kg Curb weight 451 lb. 204.6 kg Payload capacity 1,639 lb. 743.4 kg

Bed dimensions 52 x 88 to 52 x 136 inches 1.32 x 2.24 to 1.32 x 3.45 m

Overall length 177 in. 4.50m tongue extended

Floor height 20 in. 50.8 cm

Construction Fully welded hot dipped

galvanized tubular steel frame

Side panels 14 in. H 35.6 cm H Corrugated steel

Drop gates 24 in. H 61 cm H Corrugated

Lighting Trailer comes pre wired with quick connect


LED lighting. Complies with DOT requirements. Adjustable rear light protectors and protected side markers

Dump bed 2 position Hitch height 16 in. 40.6 cm

Flooring 100% steel corrugated reinforced bed

Assembly time 60 minutes approx.

Carton dimensions 88.5 x 55 x 8 inches (DWH) 224.79 x 139.7 x 20.32cm (DWH)







- Back drop gate
- 100% Steel
- Heavy duty
- Best in Class
- Extended bed length: nearly 12' / 3.66 metres.
- 2 position dump bed
- Quick release lock pin
- · Load bearing gates
- Removable steel side panels
- Corrugated steel floor
- 100% welded tubular steel frame
- Heavy-duty tail light protectors
- Solid square tube cambered axle
- Easy-lube 5 on 4.5 hub assembly
- V tongue for added strength
- 2" coupler with safety chains
- 12 x 5.3 6 ply bias tires











Item Number: OPG777 UPC: 826518005524

#### **DESCRIPTION**

Powered by 14HP KOHLER® Command PRO commercial engine. Mounted on a Heavy Duty welded 2x2 Steel, solid frame structurally engineered for endurance performance. Extreme duty 2x2 axle with dual locking hitch pins for trouble free wheel brakes and transport over rough terrain. Direct Power Drive delivers 3600RPM and 22.7 Gross Torque FT lb to a 12 inch solid steel cutting wheel mounted on premium pillar bearings.

Demolishes stumps with 9 Carbide teeth cutting 3  $\frac{1}{2}$  inches wide per cut. Cuts any diameter stump 12" high and 9 in below ground. Designed and manufactured for Strength, Durability and Performance. Features Key shut-off, locking throttle, drop stand, solid bar lift handles.

Free towbar included.

#### **SPECIFICATION**

Engine Model KOHLER CH440

Engine Command PRO Commercial

Rated Power[Kw(HP)] 14 HP Rated Speed(RPM) 3600

Tires ATV Locking Heavy Duty Axles

Wheelbase 32"

Stump Dia/Height Max Any Diameter 12 Inches High

Cutting Blades 9 Dual Carbide Cast Mounted Cutters

Cutting Width 3 ½" Cutting Path
Gearbox Direct Drive Dual Belts
Warranty 3YR Engine - 1YR Chassis

Assembled Dimensions 91 x 32 x 52"

Weight 234 lb

Shipping Crate Dims 42 x 23 x 25" - 275lb

Container Qty 158



ATV Tires DUAL Locking - Off Road only



9 Carbide Cutting Head - Direct Drive



Adjustable Bow Handle With Heavy Duty Frame Mounting



**Removable Tow Bar** 



# DIXI POWER KOHLER. Engines





14" 12 cutter commercial performance Stump Grinder.

14 HP electric start KOHLER CH440 Command PRO engine. Performs 4" wide cuts with 12 carbide high speed direct drive teeth. Heavy duty under carriage, ATV wheels. Removable flipbar for towing or easy trolley to and from the work site. New Operator controlled Posi-lok Wheel Brake for pivot grinding. Comfort bow handle with CE safety approved hands off shut down. Demolishes any diameter stump up to 14" above and 10" below ground.

KOHLER 3 yr commercial warranty. 12v battery included.

#### SPECIFICATION

Engine Model KOHLER CH440

Engine Command PRO Commercial

Rated Power[Kw(HP)] 14 HP Rated Speed(RPM) 3600

Tires ATV

Stump Dia/Height Max
Cutting Blades
Cutting Width
Cutting Wheel

Any Diameter 14" High
12 Carbide Cutters
4" Cutting Path
Direct Drive

Warranty 3YR Engine - 1YR Chassis

Assembled Dimensions 102 x 48 x 59" Weight 285 lb

Shipping Crate Dims 41 x 31 x 23" - 308 lb



#### 14" STUMP GRINDER

Item Number: OPG888E UPC: 827518006719



12 High speed Machined Carbide Cutters.



Dual direct V-Belt, high speed 3600 rpm drive.



Large multi position adjustable Bow Handle. CE approved safety shut off.



ATV wheels on HD axle. Tire 13.75D x 5.25W 145/70-6.





ATV towable 3 inch 4000RPM Direct Drive combo chipper shredder. The dual blade, centrifugal force deteriorates trees, branches, leaves, and garden composting.

Additional premium features include extra large feed chutes, drop stand and handy removable tow bar, locking wheels, removable key shutoff, 4 Stage CYCLONIC Filter System, a 7HP KOHLER CH270 Command PRO Engine and a 3YR Commercial warranty .

#### **SPECIFICATION**

Engine Model

Engine

Rated Power[Kw(HP)]

Rated Speed(RPM)

Tires

Wheelbase

Tree Diameter

Cutting Blades

Chipper Shredder

Gearbox

Expulsion Chute

Warranty

Assembled Dimensions

Weight

Shipping Crate Dims

Container Qty

KOHLER CH270

Command PRO Commercial

7HP

4000

ATV Locking

28"

3"

Dual Carbide

Leaves Brush Garden Compost

Direct Drive Adjustable

3YR Engine - 1YR Chassis

63 x 32 x 43"

170 lb

33 x 29 x 44" 198 lb

84



Item Number: OPC503 UPC: 826518005487




ATV Tires-locking - Off Road only



17/8" Removable Tow Bar



**Large Feed Chute** 



**Lock Out Safety Keys** 



### DK(\ POWER

**KOHLER**. Engines



#### DESCRIPTION

ATV towable 3" 4000 rpm 3-IN-1 Chipper Shredder with Vacuum Hose.

Double edge cutting blades with direct shaft drive centrifugal force deteriorates trees, branches, leaves, and garden composting. Extra-large feed chutes, drop stand and handy removable tow bar for compact storage, locking wheels. Removable Key lock shutoff.

Off road ATV tires. 7 HP KOHLER Command PRO engine 3 year commercial warranty.

#### **SPECIFICATION**

KOHLER CH270 Engine Model

Command PRO Commercial Engine

Rated Power[Kw(HP)] 7 HP

Rated Speed(RPM) 4000 Tires Locking

3" Tree Diameter Cutting Blades Dual Chipper Shredder Quad

**Expulsion Chute** Adjustable

Warrantv 3YR Engine - 1YR Chassis  $63 \times 32 \times 43$ " (L × W × H)

Assembled Dimensions Weiaht 200 lb

 $32 \times 29 \times 43$ " - 225 lb Shipping Crate Dims



3" 3-IN-1 CHIPPER SHREDDER WITH **VACUUM HOSE & ATV TIRES** 

Item Number: OPC503V UPC: 827518006979



Removable tow bar with trolley wheel for compact storage and easy transport.



4 hammer Shredder.



Top loading for compost, garden waste, leaves and yard clean up.



6" Leaf Vacuum with ergonomic handle.





5" chipper self contained auto feed system with hydraulic roller speeds up to 600 rpm.

Self adjusting feed chamber, large feed chute, adjustable chip chute. ATV tires with included tow bar. Advanced centrifugal clutch.

DK2 POWER manufactures performance equipment, driven by Kohler, CH440 14 HP 3 yr commercial warranty.

#### **SPECIFICATION**

Engine Model KOHLER CH440

Engine Command PRO Commercial

Rated Power[Kw(HP)] 14 HP

Rated Speed(RPM) 3600

Tires ATV Locking

Tree Diameter

Cutting Blades Auto Feed

Expulsion Chute Steel Adjustable

Expulsion Chute Steel Adjustable

Warranty 3YR Engine - 1YR Chassis

Assembled Dimensions 91 x 40 x 61"

Weight 638 lb

Shipping Crate Dims 63 x 35 x 49" - 727 lb

Container Qty



Item Number: OPC505A UPC: 826518005739



**ATV Tires** 



17/8 inch removable tow bar.



Adjustable feed speed controls.



Monter 14 m Chi440 Engine 5 real Warrants



3600 RPM CYCLONIC Chipper Shredder. Direct Drive, Dual Swing Chutes for quick drum access.

6 inch chipping capacity, reversible dual edge high speed cutting blades. Auto Adjusting CYCLONIC drum chamber deteriorates trees and brush up to 6.25 inches in diameter all from one feed chute. Large quick open hoppers, 59" truck bed height chip chute with adjustable cast iron rotating hood, easy drop stand, removable tow bar, 2 inch hitch.

Premium built-in tool box, Key shutoff with lock out safety switch. Extended 48 inch safety stability axle with DOT tires. Safety kit includes, tools, glasses, ear protection and gloves. Integrated chute handles, powder coated for durability.

#### **SPECIFICATION**

Engine Model

Engine

Rated Power[Kw(HP)]
Rated Speed(RPM)

Larea 2h

Tires

Wheelbase Tree Diameter

Cutting Blades

Chipper Shredder

Gearbox

Gearbox

**Expulsion Chute** 

Warranty

Assembled Dimensions

Weight

Shipping Crate Dims

Container Qty

KOHLER CH440

Command PRO Commercial

14 HP

3600

D.O.T. 45 MPH

47"

6"

Dual Reversible Double Edge

Auto Adjusting 6" To 1/8" Materials

Dual Direct Drive

Cast Iron Adjustable 180° 59" Pickup Bed Height

3YR Engine - 1YR Chassis

102 x 47 x 59" 375 lb

 $44 \times 25 \times 44$ " - 452 lb

72



Item Number: OPC506 UPC: 826518005517



25MPH D.O.T. Tires



2 inch removable tow bar - D.O.T. Road Legal



Extended Axle / Dual Swing Chutes / Tool Box



**Lock Out Safety Keys** 





6" kinetic cyclonic chipper, electric start 3600 rpm 14 HP CH440 KOHLER Commercial Command PRO engine.

Dual edge reversible 12" cutting blades auto adjust to pulverize brush up to 6.25" diameter trees. Tool Free Dual Swing Chutes quickly open for easy drum access. D.O.T. road legal tires. 48" extended axle for uneven ground and towing stability. Front articulated ground wheels for easy equipment moving. 2" ball tow bar. Rotational chip chute pickup truck height for bed loading.

3 year KOHLER warranty.

DK2 Power manufactures commercial performance equipment.

#### **SPECIFICATION**

Engine Model KOHLER CH440

Engine Command PRO Commercial

Rated Power[Kw(HP)] 14 HP
Rated Speed(RPM) 3600

Rated Speed(RPM) 3600 Tires D.O.T. Tree Diameter 6.25"

Cutting Blades 12" Reversable Expulsion Chute Pickup Height

Warranty 3YR Engine - 1YR Chassis Assembled Dimensions 102 x 47 x 59" (L x W x H)

Weight 594 lb

7eigit 534 ib

Shipping Crate Dims  $44 \times 30 \times 41$ " - 638 lb



# 6" CHIPPER SHREDDER

Item Number: OPC566E UPC: 827518006757



Front articulated ground wheels for easy equipment moving.



Rotational chip chute pickup truck bed height.



DOT tires size 16.5D X 6.5W.



Dual tool free swing open chutes for fast drum access.

# **DK(\ POWER**

**KOHLER**. Engines





40 Ton Kinetic Ultimate speed 1 sec Commercial Grade Log Splitter.

KOHLER Command PRO 4000 RPM CH270 3YR warranty engine. Oversized reinforced steel work table, safety lockout, Clam shell quick access body. Extended stability axle with ATV tires. 2 IN ball hitch, 22 inch long logs.

This machine gets it done, quality manufactured for top performance. Auto retraction bearing guided ram. This powerful splitter performs during 40 ton force cycles.

#### **SPECIFICATION**

Engine Model

Engine

Rated Power[Kw(HP)] Rated Speed(RPM)

Max Log Length

Warrantv

Assembled Dimensions

Weight

Shipping Crate Dims

Container Qtv

Tow Bar Log Rails Wedge

Cycle Time Ram Speed KOHLER CH270

Command PRO Commercial

7HP 4000

ATV Tires

22"

3YR Engine - 1YR Chassis

120 x 37 x 44""

573 lb

 $71 \times 27 \times 23$ " - 607 lb

68 2" Ball Slide Reload 8" Expansive 1 Second

½ Second Deployment



Item Number: OPS240 UPC: 826518005746



8" Expansive solid steel wedge



Oversize steel work table



**ATV Tires** 



2 inch ball hitch





All terrain BIG DUMP moves 1100 LBS with self drive electric power. Run your Big Dump 6 to hours on one charge.

Hydraulic electric lift cylinder tip bucket to 90 degrees vertical to clean your load. Throttle bar speed control with articulated floating rear wheels keep your load level and steady.

At 6 MPH quickly move about your job site. Dual front wheel drive climbs over rough terrain with ease.

#### **SPECIFICATION**

Max Capacity

Max Speed

Charge Time

Run Time

Wheels

Warranty

Assembled Dimensions

100 lb

6 mph

5 hours

All terrain

17R Chassis

85 x 46 x 42"

Weight 320 lb

Shipping Crate Dims 54 x 32 x 35" 508 lb

Container Qty 69



Item Number: OPD811 UPC: 826518005722



1100lb Max Capacity



All terrain tires



Max speed 6 mph



Vertical dump 90 degrees





Direct Chain Drive Trencher. High pressure sintered carbide teeth. 5 depth positions, dual locking wheels for digging in reverse. 3/8" plow plates with quick change teeth. Adjustable handle, Keyed safety lock out, 6 inch direct drive auger. Heavy gauge steel construction.

4000 RPM direct drive, 400 RPM tri-cut teeth chain drive. 200FT per hour dig rate.

KOHLER CH270

#### **SPECIFICATION**

Engine Model
Engine
Rated Power[Kw(HP)]

Rated Speed(RPM) Chain Speed Chain Dimension Trench Cutting Teeth

Wheels Gearbox Auger Warranty Assembled Dimensions Weight Shipping Crate Dims

Container Qty

7HP 208CC 10.5 FT lb torque @ 4000RPM 4000 1800 FT Per Minute 63" 4" x 18" 21 Carbide Alloy High Pressure Teeth. 400 RPM Dual Auto Lock In Reverse Dig Dual Belt Chain Drive Auger Side Offload Direct Drive 3YR Engine - 1YR Chassis

Command PRO Commercial

320 lb 41 x 30 x 34" 374 lb 99

71 x 36 x 48"



Item Number: OPT118 UPC: 826518005586



**Tri-Cut High Carbide Teeth** 



**Trolley Wheel** 



Lock out safety keys - Locking Throttle



Auger guard



Direct Chain Drive Trencher. High pressure sintered carbide teeth. 5 depth positions, dual locking wheels for digging in reverse. 3/8" plow plates with quick change teeth. Adjustable handle, Keyed safety lock out, 6 inch direct drive auger. Heavy gauge steel construction.

3600 RPM direct drive, 400 RPM tri-cut teeth chain drive. 200FT per hour dig rate.

#### SPECIFICATION

Engine Model
Engine
Rated Power[Kw(HP)]

Rated Speed(RPM) Chain Speed Chain Dimension Trench Cutting Teeth

Wheels Gearbox Auger Warranty

Assembled Dimensions

Weight

Shipping Crate Dims Container Qty KOHLER CH440

Command PRO Commercial 14HP 429CC 22.7 FT lb torque

@ 3600RPM

3600

1800 FT Per Minute

79"

4" × 24"

27 Carbide Alloy High Pressure

Teeth. 400 RPM

Dual Auto Lock In Reverse Dig Dual Belt Chain Drive Auger Side Offload Direct Drive 3YR Engine - 1YR Chassis

85 x 36 x 48"

375 lb

 $44 \times 31 \times 38$ " 474 lb

60



Item Number: OPT124 UPC: 826518005463



**Tri-Cut High Carbide Teeth** 



**Trolley Wheel** 



Lock out safety keys - Locking Throttle



Auger guard





DK2 is proud to bring you the ultimate snow plow solution in our line up - the DK2 Everest.

This prosumer, fully hydraulic snow plow kit provides you the opportunity to clear your parking lot, driveway, or laneway whenever required. With our fully hydraulic system you can raise, lower, and angle the snow plow blade from inside your vehicle using our wired hand held remote.

For extreme durability against the elements and rust, DK2 combines an industrial powder-coated paint finish on the blade with hot dipped galvanized hardware components to keep your plow looking new for years.

The plow itself simply clips to a DK2 custom fitted vehicle mounting system and can pretty much mount to anything that's fit to push snow.

#### **SPECIFICATION**

- Blade (W x H): 88" x 22"
- Assembled Plow Weight: 380 lbs
- Shipping Dims (wdh): Box 1: 46.5" x 24.25" x 14" Box 2: 37" x 34" x 23"
- Shipping Weight: 425 lbs
- Construction: Steel tube & sheet
- Colour/Finish: Black industrial powder coated blade skin and all other components
- Lift System: Hydraulic
- Angling System: Hydraulic, multiple positions
- Control System: Wired remote control to lift, lower, angle left or right
- Vehicle Mounting System: Custom bolt-on mounting brackets \*Sold Separately
- Scraper Blade: Powder coated steel, replaceable
- Included: Snow Deflector, Skid Shoes









#### **EVEREST** SNOW PLOW **FULLY HYDRAULIC Custom Mount**

Item Number: EVST9022 UPC: 826518005579

- Ships partially assembled (mount & wiring required).
- Simple bolt on custom fitted mounting brackets, no drilling or welding required (sold separately).
- Hydraulic system lifts and lowers blade (a more reliable repetitive-use mechanism than a winch).
- Light weight, no need to alter stock suspension.
- · Black UV powder coated components with an industrial painted blade skin.
- Self leveling foot provides max blade tip clearance when the blade is fully raised.
- Skid shoes to assist guiding the blade edge over uneven terrain or from possibly marking those more delicate driveways.
- Snow Deflector to assist directing snow forward and also minimizing windshield spray.
- Blade markers to point out blade
- Hydraulic positioning.
- Wired hand held control.
- Reliable industrial hydraulic lift systems.
- Blade hardware holds the hydraulic pump so it can get rolled away from the vehicle rather than being left on the truck with the mount.
- Thicker trip springs to ensure tension remains strong and coils tight for optimal performance when encountering obstacles.
- Existing holes in plow frame make it easy to add bolt-on accessories.
- Bolt on accessories and upgrades available.
- One-year manufacturers warranty.





#### Wireless Winch

Our brand new DK2 Avalanche Snow Plow kits combine the simplicity of our original T-Frame plow with the strength of our custom mount frame.

The DK2 Avalanche Snow Plow allows you to quickly and effectively remove snow from your driveway or small parking lot. The Avalanche simply slides into a 2" front mount receiver for easy removal and storage.

Each snow plow ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a 3,000lb wireless electric winch. Each Avalanche plow will also include a set of blade stiffeners for added strength by creating a 3 point connection.

#### SPECIFICATION

- Item Number: AVAL8219
- Blade Dimensions: 82 x 19 Inches H
- Assembled Weight: 265 lbs
- Gross Weight: 321 lbs
- Box Dimensions: 46 x 36 x 18 Inches
- UPC: 826518004992
- Item Number: AVAL8422
- Blade Dimensions: 84 x 22 inches H
- Assembled Weight: 283 lbs
- Gross Weight: 334 lbs
- Box Dimensions: 44 x 32 x 18 inches
- UPC: 826518005005

#### • Item Number: AVAL8826

- Blade Dimensions: 88 x 26 inches H
- Assembled Weight: 296 lbs
- Gross Weight: 341 lbs
- Box Dimensions: 46 x 35 x 17 inches
- UPC: 826518005708









Universal Mount

Item Numbers: AVAL8219 AVAL8422 AVAL8826

- Fits most light trucks and SUV's
- Easy to mount simply slides into a 2" class III front mount receiver in seconds. Slide out and roll away for storage
- An electric winch lifts the blade, controlled from inside your warm vehicle for easy up and down snow control
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel with UV protected paint
- Flip down locking castors allow easy plow attachment, removal, and roll away storage – just lower the wheels and roll the unit to wherever you want it
- Each snow plow kit also includes a set of blade stiffeners for added strength
- ISO 9001 certified manufacturer
- 1 year limited warranty
- Ships in a single carton on a standard size pallet





#### Wireless Actuator

The Elite version of the DK2 Avalanche Snow Plow still combine the simplicity of our original T-Frame plow with the strength of our custom mount frame but also use a wireless actuator instead of a winch.

The DK2 Avalanche Snow Plow allows you to quickly and effectively remove snow from your driveway or small parking lot. The Avalanche simply slides into a 2" front mount receiver for easy removal and storage.

Each elite snow plow ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a wireless actuator. Each Avalanche plow will also include a set of blade stiffeners for added strength by creating a 3 point connection.

#### **SPECIFICATION**

- Item Number: AVAL8219ELT
- Blade Dimensions: 82 x 19 Inches H
- Assembled Weight: 265 lbs
- Gross Weight: 321 lbs
- Box Dimensions: 46 x 36 x 18 Inches
- UPC: 826518005661

#### • Item Number: AVAL8422ELT

- Blade Dimensions: 84 x 22 inches H
- Assembled Weight: 283 lbs
- Gross Weight: 334 lbs
- Box Dimensions: 44 x 32 x 18 inches
- UPC: 826518005685

#### • Item Number: AVAL8826ELT

- Blade Dimensions: 88 x 26 inches H
- Assembled Weight: 296 lbs
- Gross Weight: 341 lbs
- Box Dimensions: 46 x 35 x 17 inches
- UPC: 826518005715









Universal Mount

**PLOWS** 

Item Numbers: AVAL8219ELT AVAL8422ELT AVAL8826ELT

- Fits most light trucks and SUV's
- Easy to mount simply slides into a 2" class III front mount receiver in seconds. Slide out and roll away for storage
- A wireless actuator lifts the blade, controlled from inside your warm vehicle for easy up and down snow control
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel with UV protected paint
- Flip down locking castors allow easy plow attachment, removal, and roll away storage – just lower the wheels and roll the unit to wherever you want it
- Each snow plow kit also includes a set of blade stiffeners for added strength
- ISO 9001 certified manufacturer
- 1 year limited warranty
- Ships in a single carton on a standard size pallet





Wireless Winch

All DK2 Snow Plows allow you to quickly & effectively remove snow from your driveway or small parking lot. DK2's range of personal plows each mount on to a vehicle specific custom mounting brackets.

Ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a 3,000lb wireless electric winch.

#### SPECIFICATION

- RAMPAGE II
- Item Number: RAMP8219
- Blade Dimensions: 82 x 19 inches
- Assembled Weight: 265 lbs
- Gross Weight: 315 lbs
- Box Dimensions: 43 x 32 x 18 inches
- Custom mount sold separately
- UPC: 693495992167

#### STORM II

- Item Number: STOR8422
- Blade Dimensions: 84 x 22 inches
- Assembled Weight: 283 lbs
- Gross Weight: 325 lbs
- Box Dimensions: 44 x 32 x 18 inches
- · Custom mount sold separately
- UPC: 693495992174

#### SUMMIT II

- Item Number: SUMM8826
- Blade Dimensions: 88 x 26 inches
- Assembled Weight: 296 lbs
- Gross Weight: 341 lbs
- Box Dimensions: 46 x 35 x 17 inches
- Custom mount sold separately
- UPC: 693495992181









Item Numbers: RAMP8219 STOR8422 SUMM8826

- Fits most light trucks and SUV's
- Easy to mount simply slides onto your custom vehicle specific mounting brackets in seconds. Slide out and roll away for storage
- An wireless winch lifts the blade, controlled from inside your warm vehicle for easy up and down snow control
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel construction with UV protected paint
- Locking castors allow easy plow attachment, removal, and roll away storage – just lower the wheels and roll the unit to wherever you want it
- ISO 9001 certified manufacturer
- 1 year limited warranty
- Ships in a single carton on a standard size pallet





#### Wireless Actuator

Dk2's line of personal snow plows just got better! The DK2 ELITE SERIES Snow Plow line up takes its simple yet effective design and improves on it with a wireless actuator for ultimate reliability.

DK2's ELITE SERIES each mount on to a vehicle specific custom mounting brackets. Each snow plow ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a wireless electric actuator kit.

#### SPECIFICATION

- RAMPAGE II ELITE
- Item Number: RAMP8219ELT
- Blade Dimensions: 82 x 19 inches
- Assembled Weight: 265 lbs
- · Gross Weight: 315 lbs
- Box Dimensions: 43 x 32 x 18 inches
- Custom mount sold separately
- UPC: 826518005326

#### STORM II ELITE

- Item Number: STOR8422ELT
- Blade Dimensions: 84 x 22 inches
- Assembled Weight: 283 lbs
- Gross Weight: 325 lbs
- Box Dimensions: 44 x 32 x 18 inches
- Custom mount sold separately
- UPC: 826518005333

#### • SUMMIT II ELITE

- Item Number: SUMM8826ELT
- Blade Dimensions: 88 x 26 inches
- Assembled Weight: 296 lbs
- Gross Weight: 341 lbs
- Box Dimensions: 46 x 35 x 17 inches
- Custom mount sold separately
- UPC: 826518005340









# **PLOW KITS**Custom Mount

Item Numbers: RAMP8219ELT STOR8422ELT SUMM8826ELT

- Fits most light trucks and SUV's
- Easy to mount simply slides onto your custom vehicle specific mounting brackets in seconds. Slide out and roll away for storage
- An electric actuator lifts the blade, controlled from inside your warm vehicle for easy up and down snow control
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel construction with UV protected paint
- Locking castors allow easy plow attachment, removal, and roll away storage – just lower the wheels and roll the unit to wherever you want it
- ISO 9001 certified manufacturer
- 1 year limited warranty
- Ships in a single carton on a standard size pallet





Just because you don't have a receiver hitch on your vehicle doesn't mean you cant take your bikes with you. The DK2 BCR190 allows you to strap our carrier to the trunk of your car or small SUV and haul up to 3 bikes with you. Adjustable for most makes and model of vehicles and easy to assemble. Soft rubber cradles and strap allow you to secure the bikes to the carrier without managing the finish or performance of you bicycles. Six adjustable straps will securely hold the bikes in place for whatever trip you take!



Folding adjuster.



Attachment Straps.



Frame straps are easy to use and long lasting. (We tested this over 5000 times without breaking!)



# TRUNK MOUNTED BIKE CARRIER

Mounts to the trunk of most cars

Item Number: BCR190 UPC: 827518007129

- UV Resistant.
- Extreme Temperature Resistant.
- N.W: 6.61 lbs (3kg)
- G.W: 9 lbs (4.1kg)
- Size: 27.7 x 12.7 x 25.9" (62.8 x 32.5 x 66 cm)
- Box size: 29.5 x 6.1 x 18.8" (75 x 15.5 x 48cm)





The DK2 Hitch Mounted Bike Carrier is the perfect way to transport your bicycles on those long road trips. Quick and easy assembly takes only minutes. The BCR290 is constructed of UV power coated steel to help resist damage from harsh weather conditions. Simply slide the bike carrier into your 2 inch receiver hitch and secure using the anti wobble hitch pin. No mark straps allow you to secure up to 4 bikes to your carrier for transportation. The carrier also tilts away for easy access to your trunk.



Fits any 2" Receiver.



Easy to assemble.



Frame straps are easy to use and long lasting. (We tested this over 5000 times without breaking!)



# HITCH MOUNTED BIKE CARRIER

# Mounts to the hitch of most cars

Item Number: BCR290 UPC: 827518007136

#### **FEATURES**

- Mounts up to 4 bikes
- Powder coated steel
- Easy to assemble
- Can be folded when not in use
- Can open trunk when fitted
- N.W: 19.9 lbs (9.07kg)
- G.W: 21.7 lbs (9.87kg)
- U Pipe Size: 24.4" (62cm) Height: 35.4" (90cm)
- Box size: 26.4 x 13.7 x 3.5"

(67.3 x 34.8 x 8.9cm)



Family holidays are always better when you take the bikes along too. Detail K2 offers two different hitch mounted bike racks to do just that. Carry up to 4 bicycles easily.



Three different positions allow you to minimize distance bike carrier extends while also being able to swing the unit away and access the rear of your vehicle.



#### HITCH MOUNTED BIKE CARRIER

Mounts to any 2" hitch receiver

Item Number: BCR490 UPC: 827518001172

- Carries up to four bicycles on individually adjustable cradles
- Padded no-mark cradles with dual bike retention straps
- Cradle bar folds down when not in use
- Carries up to 4 bicycles on adjustable saddles
- Saddle bar folds down when not in use
- Unit swings down for access to the rear of vehicle
- Steel construction
- Black powder coat finish resists scratches and corrosion
- Slides into a standard 2" hitch receiver, Class III or IV (optional 1-1/4" adaptor kit available upon request)
- Shipped unassembled
- Weight: 44 lb. (19.96 kg)





The DK2 Hitch Mounted BCR590 Bike Carrier fits into either a 1-1/4" or 2" receiver hitch. This unit allows you to transport two bicycles by securing them to carrier. The BCR590 adjusts in width and height to fit your bike while making sure the no mark straps do not damage the finish of your bike. The carrier folds up when not in use and the center arm can fold down to allow access to the rear of the vehicle without removing the rack. Light weight and easy to assemble the BCR590 is the perfect solution for those long road trips!



Fit for 1 1/4" and 2" and hitch Receiver.



Safe bike holder

with adjustable

height.



Can adjust the rack according to the bike tire size and secure with the rubber straps.

#### HITCH MOUNTED BIKE PLATFORM RACK

Mounts to any 2" or 1.25" hitch receiver

Item Number: BCR590 UPC: 827518007112

- Easily adjustable to all frame size.
- Transports up to 2 bikes
- Push button ratcheting arms
- Easily adjusts to all frame sizes
- Rack folds for easy storage
- Folding center arm allows for easy rear vehicle access
- Material: Steel
- Finish: Black power coating
- 2" hitch & 11/4" hitch
- N.W: 28.6 lbs (13kg)
- G.W: 30.4 lbs (13.8kg)
- Size: 38.1 x 11 x 5.9" (97 x 28 x 15cm)
- Box size: 40.5 x 9.8 x 5.3" (103 x 25 x 13.5cm)



Increase the cargo capacity of your vehicle or haul bulky, messy items like luggage, coolers or firewood. Easy assembly. Conveniently mounts to any 2" hitch receiver on cars, SUVs, trucks, or vans.



Flips up when not in use, and stows up against the rear of the vehicle.



#### HITCH MOUNTED CARGO CARRIER

Mounts to any 2" hitch receiver

Item Number: HCC602 UPC: 827518001165

- Black powder-coat finish resists corrosion.
- Carrying capacity dependent on receiver strength: 500 lb. (226.8 kg) when used with a Class III / IV hitch.
- Heavy-duty tubular and expanded steel mesh construction.
- Mounts to any 2" hitch receiver.
- Conveniently flips up when not in use.
- Ships unassembled.
- Dimensions: 60 x 20 x 6 inches (152.4 x 50.8 x 15.2 cm).
- Assembled weight: 59.5 lb. (27 kg).





The DK2 Hitch Mounted Aluminum Cargo Carrier allows you to immediately increase the cargo capacity of your vehicle so you can haul bulky, messy items like luggage, coolers or firewood. This functional item has a 500lb carrying capacity and also flips up close to your vehicle when not in use. The aluminum construction is lightweight while still being durable and rust proof.



#### TECHNICAL SPECS

#### Assembled Product:

Height: 6.5 InchesWidth: 49.5 InchesDepth: 22.25 Inches

• Weight: 29 lbs.

#### Packaged Product:

Height: 4 InchesWidth: 50 InchesDepth: 24 InchesWeight: 32 Lbs

#### ALUMINIUM HITCH MOUNTED CARGO CARRIER

Mounts to any 2" hitch receiver

Item Number: HCC502A UPC: 826518005051

- Increase The Cargo Capacity Of Your Vehicle.
- · Easy Assembly.
- Mounts To Any 2 in. Hitch Receiver.
- Flips Up When Not In Use; Stows Against Rear Of Vehicle.
- Aluminum Finish Resists Corrosion.
- Includes threaded anti-wobble hitch pin for added stability.
- Carrying Capacity Dependent On Receiver Strength.
- Ships Unassembled.
- Reflectors for added safety.



#### How to determine weight capacity

To determine the weight capacity for the Detail K2 Hitch Mounted Motorcycle Carrier, you must first determine the tongue weight limit of your hitch receiver AND the tongue weight limit of your vehicle. Take the lesser of these two figures and see the chart opposite:

Hitch / Vehicle Tongue Weight Limit (use lowest figure)		Max. Carrying Capacity of K2 Carrier	
300 lb.	136 kg	180 lb.	82 kg
350 lb.	159 kg	225 lb.	102 kg
500 lb.	227 kg.	350 lb.	159 kg
750 lb.	340 kg	450 lb.	204 kg

Example 1

If you have an SUV with a hitch receiver max. tongue weight of 500 lbs, AND your SUV manufacturer states that the maximum tongue weight for your vehicle is 500 lbs, then the maximum weight you can load on the Detail K2 Hitch Mounted Motorcycle Carrier is 350 lbs.

Example 2

If you have an SUV with a hitch receiver max. tongue weight of 500 lbs, BUT your SUV manufacturer states that the maximum tongue weight for your vehicle is only 350 lbs, then the maximum weight you can load on the Carrier is 225 lbs.



# HITCH-MOUNTED MOTORCYCLE CARRIER

Mounts to any 2" hitch receiver

Item Number: TMC201 UPC: 693495970561

- Extremely versatile, Extremely secure and stable: patent-pending design results in snug, "antiwobble" fit.
- Tilts down to allow easy loading: one-person operation
- Easily installed and removed: no extra tools required
- Ideally suited for SUV, RV, or pickup truck with cap
- Features adjustable front wheel channel (to accommodate different sized bikes) and retractable tie-down bar
- Comes with safety chains and hitch pin
- Fits standard 2-" class III or IV hitch receiver: weight capacity dependent on receiver strength
- Black UV powder-coat finish





The TFR150 give you flexibility and combines the safety and security of a headache rack with the functionality of an elevated ladder rack. Installation takes minutes, requires no drilling and fits most full size trucks.

With a simple flip up and back of the crossbar the rack immediately gives you the ability to transport everyday things that require extra length. Ladders, pipe, lumber and even canoes all easily tie down fixed and secure on the upper deck. Once you're done the crossbar is easily flipped forward and down and secured back to its starting position against the headache rack.

#### **AVAILABLE ACCESSORIES**

- Light Bar
- Boat Rack
- Adaptor Kit for Hard Top Tonneau Covers



#### DK2 FLIP RACK

### Easy, no drilling installation

Item Number: TFR150 UPC: 693495970721

- Converts from a window guard into a full-length utility rack with a simple "flip" of a crossbar
- Strong and rigid: heavy-duty steel construction
- Cargo can be secured to window guard to prevent shifting loads
- Rack can support up to 225 kg / 500 lbs (distributed) in open position: ladders, lumber, etc.
- Easily installed and removed
- No drilling truck (clamps provided)
- Fits most makes and model trucks
- Pkg. dim.: 54.0 x 24.0 x 5 inches (1372 x 610 x 127 mm)
- Gross weight: 121.25 lb. (55 kg)
- Minimum bed width is 51 inches



New to the DK2 family is the GL10 Portable Battery Booster. This unit is industry leading in every way and can provide a portable emergency power source when you need it most.

The GL10 comes with intelligent clamps that fit both 12V and 24V car jump starters. There is intelligent detection circuit which can tell the output voltage of 12V and 24V car jump starter, and start different protection system accordingly. The unit also has a warning sound and LED light reminder.

Overall protection functions include: back charge protection, overcharge protection, over discharge protection, shortage protection and reverse polarity protection, as well as function of testing the situation of the cars battery.





# HEAVY DUTY PORTABLE BATTERY BOOSTER PACK

Item Number: GL10 UPC: 826518004916

#### **ACCESSORIES**

- Starting Power Bank
- Home Charger
- Micro Cable
- Jump Cable Battery Clamps
- 12 V Output Converter
- 24 V Output Converter
- User Manual
- Carrying Bag

#### **SPECIFICATION**

• Battery Capacity: 88.8 Wh

• Start Current: 400 A

• Peak Current: 800 A

• Input: 15 V / 2 A

 $\bullet$  Output: 5 V / 2 A, 12 V / 24 V for

Jump Start

• Charging Time: 4.5 Hours

• Life Time: > 800 Cycles

• Size: 7" L x 2.5" W x 2.5" H

• Weight: 1040g





The DK2 Power 2 Go is the incredibly powerful yet versatile battery jump starter that literally sits in the palm of your hand.

Slightly larger than your Smartphone, it is powerful enough to jumpstart most full sized cars and trucks. All this power and it can still be easily

stored in your glove box. With multiple ports and adapters included, there's no longer a need to panic when your Smartphone. tablet or

laptop is running low on power. Simply plug into your DK2 Power 2 Go and watch in amazement as your device quickly charges.

The P2G can be used on: Cars, Bobcats, ATV's, UTV's, Snow-mobiles. Golf carts, and Boats.





# POWER 2 GO PORTABLE BATTERY CHARGER

Item Number: P2G850 UPC: 826518005142

#### **FEATURES**

- Built in rechargeable high output Lithium-iron battery
- 14,000 mAh capacity
- Upgraded Copper Booster cables and clamps
- Output: 12V / 5V, 2 A
- Peak Current 400A
- 850 Cold Cranking amps starting current
- Can boost a single vehicle 20 times on a single charge
- Overload and over-charge protection
- Charging adapters for most major electronic devices

#### **SPECIFICATION**

• Item Number: P2G850

• Unit Dimensions: 6.3 x 3.0 x 1.4"

• Assembled Weight: 2 lbs

• Gross Weight: 3 lbs

• Box Dimensions: 11 x 2 x 8"





Gone are the days of having too many tools that serve only one purpose.

A pressure washer, blower, inflator, and vacuum all in one, the DK2 4 in 1 Cordless Kit is a first of its kind. The lightweight and secure handle is designed to make switching attachments effortless, while the high capacity battery won't run out until the job is done.

Don't let its compact size fool you, the DK2 4-in-1 Cordless Kit's convenient size is designed for anyone to tackle any job.

# **CONTENTS INCLUDE**

- 20v x 2.0AS Lithium Battery x 2
- 1-hour quick charging station
- High Pressure Washer Attachment (330 PSI max pressure)
- 20 ft Water Hose
- Inflator attachment
- Blower Attachment
- Vac Cleaner Attachment



Item Number: CHPW102 UPC: 827518007105

#### **FEATURES**

- 1 hour quick charge.
- 1 year warranty

### **SPECIFICATION**

#### **Cordless Pressure Washer:**

- Max pressure: 360 PSI / 25 bar
- Flow: 2.5 L per min.
- 1 × 6 m (19.8 ft.) hose
- 1 × short lance
- 1 × spray nozzle

#### **Cordless Inflator:**

- Max pressure: 100 PSI / 7 bar
- 1 × 50 cm (19.7 in.) inflator hose
- 1 × ball adaptor
- 1 × air bed adaptor

#### **Cordless Vacuum Cleaner:**

- No-load speed: 0-15000 RPM
- Blower air flow: 2.5 m³ per minute
- Vacuum: 8000 Pa
- Container capacity: 0.6 L

#### **Cordless Blower:**

- No-load speed: 0-15000 RPM
- Blower air flow: 2.5 m³ per minute







# **DESCRIPTION ELECTRIC HOISTS**

Compact, general purpose 240v electric hoist is ideal for all manner of lifting applications. Easy to install, with easy change cable design. It is supplied with special fixing clamps for simple section beam fitting (square section beams). This hoist also has the facility to add a wireless remote control as an option.



# **DK2 WARRIOR** HOISTS

Item Numbers: EH250, EH500

## **SPECIFICATIONS**

Model: EH250 (120v)

Max Load

Single Pull: 275 lbs (125 kg) Double Pull: 551 lbs (250 kg)

Lift Speed p/min

Single Pull: 59 ft (8m) Double Pull: 29 ft (4m) Cable: 0.12 in x 59ft 3mm x 18m

Rating: IP54

Model: EH500 (120v)

Max Load

Single Pull: 551 lbs (250 kg) Double Pull: 1102 lbs (500 kg)

Lift Speed p/min

Single Pull: 59 ft (8m) Double Pull: 29 ft (4m) Cable: 0.15 in x 59ft

4mm x 18m

IP54 Rating:







Ideal for large ATV's and small trailers. A huge high power motor, heavy duty clutch, heavy duty steel gearing and heavy duty waterproof contactors ensure the ultimate in performance and reliability. Strengthened Steel drum makes it ideal to use with Synthetic Rope.

Watertight 4 Pin connection allows the use of 'Plug and Play' Wireless.

# **SPECIFICATION**

#### **C2500N**

**RATED LINE PULL:** 2500lbs(1134kg) **MOTOR: 12v:** 1.35hp / 0.95kw **GEARING:** 170:1

BRAKING ACTION: Dynamic
DRUM SIZE Dia x L: 1.5 x 3.1"

**CABLE Dia x L:** 0.2" x 46 ft WR 0.2" x 46 ft SR

**MOUNT PATTERN:** 3.1"

**DIMENSIONS:** 13.2 × 4.4 × 6.5"

#### C3500N

**RATED LINE PULL:** 3500lbs (1588kg) **MOTOR: 12v:** 1.95hp / 1.37kw

**GEARING:** 170:1 **BRAKING ACTION:** Dynamic **DRUM SIZE Dia x L:** 1.5 x 3.1"

**CABLE Dia x L:** 0.2" x 42 ft WR 0.2" x 46 ft SR

**MOUNT PATTERN:** 3.1"

**DIMENSIONS:** 13.7 × 4.6 × 6.5"





# NINJA SERIES ATV WINCHES

Item Numbers: C2500N, C2500N-SR C3500N, C3500N-SR

### **FEATURES**

- Sealed High Power Motor
- Heavy Duty Watertight Contactors
- Full Steel Planetary Gearing
- Strengthened Steel Drum (suitable for Synthetic rope)
- Watertight Controller Socket
- Gloss Chip Resistant Paint

- Steel Cable
- · Heavy Duty Roller Fairlead
- Heavy Duty Battery Leads
- 3 Tonne Pulley Block
- Mounting plate & Hardware
- 1/4 hook





High quality three stage planetary gearing ensure this is one of the quietest and smoothest winches on the market.

The silky smooth performance and the full load holding brake make it the perfect solution for high spec applications.

# **SPECIFICATION**

**RATED LINE PULL:** 4500lbs (2041kg) **MOTOR: 12v:** 1.95hp / 1.37kw

GEARING: 172

**BRAKING ACTION:** Auto in the drum **DRUM SIZE Dia x L:** 1.7 x 3.8"

**DRUM SIZE Dia x L:**  $1.7 \times 3.$  **CABLE Dia x L:**  $0.25^{\circ}$  ×

0.25" x 47.5ft WR 0.24" x 49 ft SR

**MOUNT PATTERN:** 5 × 3.7"

**DIMENSIONS:** 14.4 x 4.9 x 6.4" **WEIGHT:** 28.6 lbs

Layer of	Line pull
wire rope	lbs (kg)
1	4500 (2401)
2	3642 (1652)
3	3060 (1388)
4	2638 (1196)

Line pull	Line speed		Amp	draw
lbs (kg)	ft/min	m/min	12v	24v
0	11.6	3.6	20	15
1500 (680)	9.2	2.8	70	40
2500 (1134)	7.8	2.4	100	65
3500 (1587)	6.6	2.0	140	80
4500 (2041)	4.9	1.5	200	130











# NINJA SERIES TRAILER WINCHES

Item Numbers: C4500N C4500N-SR

#### **FEATURES**

- Power in and Power out
- High Torque 1.95hp Motor
- HD Waterproof Contactors
- Full Steel Planetary Gearing
- Mount Plate as Standard
- Full Load Holding Break
- · Can fit tow ball mount

- 0.25" x 47.5ft Steel Cable
- 3m Remote Handset
- Heavy Duty Roller Fairlead
- Heavy Duty Battery Leads
- Mounting plate
- Mounting hardware
- 3/8 hook
- \*ATV remote available





The Trojan Portable Utility Winch is a complete winching solution in a convenient kit that features a 4,000 lb rated line pull winch on a unique powder coated winch platform, all in a compact, easy to carry composite tool box. The kit is easy to store, use, and repack. Completely portable, the Trojan requires no installation and does not require a winch mount; however, it can be permanently mounted on a trailer and be used as a utility winch if desired.

# **SPECIFICATION**

RATED LINE PULL: 4000lbs (1814kg) MOTOR: 12v: 1.4 hp (1.0 kW)

**GEARING:** 166:1

CABLE Dia x L: 5.4mm x 12.8m

(Synthetic Version: 5mm x 15m)

**WEIGHT:** 20.5ka

(Synthetic Version: 19 kg)

Line pull	Line speed		Amp draw
lbs (kg)	ft/min m/min		12v
0	20	6	20
4000 (1814)	5.5	1.6	220







**Synthetic Rope** version available



**Item Numbers: 40PUS12 40PUA12** 

#### **FEATURES**

- 4000 lb Pulling Power
- Synthetic or Wire Rope version available
- Built in 1/4 inch hardened steel plate
- · Can be permanently mounted
- Quick plug and play functionality

- 6 000 lb pulley block
- Quick connect cord with alligator clips
- Three 20.000 lb D-shackles
- 2 x 8 ft HD straps rated 8,000lbs
- 12ft Hand Help Remote
- 10 foot quick connect power cord
- Heavy Duty leather palmed winch gloves









Warrior Winches are delighted to announce the arrival of the new member of Spartan Series, Tough, Strong and ready for Battle. The Spartan 6000 Lb short drum model is ideal where space and payload are limited. The winch has a short drum and is less than 66Lbs, however the extended drum supports allow it to carrier up to 131ft of 0.28" cable. The Synthetic rope version comes fitted with 0.27" x 98ft.

We really believe these to be the best value for money Winches around, a lower price does not mean that we have had to compromise the core values integral to a good winch, such as reliability and durability.

With great performance, outstanding features included as standard, & backed by the Warrior Winches un-rivalled limited Lifetime Warranty, this should make a Spartan the first choice for all serious enthusiasts.

# SPECIFICATION

RATED LINE PULL: 6000 lbs (2727kg) MOTOR: 12V: 4.5hp / 3.4kW

**GEARING:** 230:1 DRUM SIZE Dia x L: 2.48 x 4.2"

CABLE Dia x L: 0.28" x 131 ft WR

0.28" x 98 ft SR

**DIMENSIONS:** 17.4 × 7.7 × 10.8"

**WEIGHT:** 66 lbs

Layer of wire rope	Line Pull lbs (kg)	Cable Cap ft (m)
1	6000 (2727)	9.8 (3.0)
2	4979 (2258)	22.0 (6.7)
3	4255 (1930)	36.1 (11.0)
4	3714 (1685)	52.2 (15.9)
5	3296 (1495)	70.5 (21.5)
6	2962 (1344)	90.9 (27.7)
7	2690 (1220)	113.2 (34.5)
8	2463 (1117)	131.2 (40.0)

Line pull	Line speed		Amps
lbs (kg)	ft/min	m/min	12v
0	19.4	5.9	80
2000 (907)	13.1	1.0	140
4000 (1814)	9.2	2.8	210
6000 (2727)	7.2	2.2	285

Steel Cable

version available



# SPARTAN 6000 ELECTRIC WINCH

**Item Numbers:** 6000 6000-SR

#### **FEATURES**

- Weather Sealed High Performance Motor
- Heavy Duty 3 Stage Gearbox
- Heavy Duty Drum Supports
- Weather Sealed Solenoids
- Full Steel Planetary Gearing
- Full Load Holding Brake
- Every winch is 100% Load Tested
- Chip Resistant Gloss Paint Finish

- 10ft Remote Handset
- 5/16 Hook
- Aluminium or Roller Fairlead (Synthetic rope or steel cable)
- Heavy Duty Battery Leads
- Stainless Steel Mounting Hardware
- 0.27" x 98ft Synthetic Rope or 0.28" x 131ft Steel Cable





We are delighted to announce the arrival of the Spartan Series, Tough, Strong and ready for a Battle, these Winches really will challenge all before them. We have reluctantly termed them as 'entry level', however this describes the price point, not the performance.

We really believe these to be the best value for money Winches around, a lower price does not mean that we have had to compromise the core values integral to a good winch, such as reliability and durability.

# **SPECIFICATION**

#### 8000

**RATED LINE PULL:** MOTOR: 12v: **GEARING: BRAKING ACTION:** 

DRUM SIZE Dia x L: CABLE Dia x L:

**MOUNT PATTERN: DIMENSIONS:** 

8000lbs(3629kg) 4.6hp / 3.2kw 233:1

Auto in the drum 2.5 x 8.8" 0.3" x 85 ft WR 0.35" x 82 ft SR

10 x 4.5" 21.3 x 6.3 x 8.6"



#### 9500

RATED LINE PULL: MOTOR: 12v: **GEARING:** 230:1

**BRAKING ACTION: DRUM SIZE Dia x L:** 2.5 x 8.8"

CABLE Dia x L:

**MOUNT PATTERN: DIMENSIONS:** 

9500lbs(4500kg) 4.6hp / 3.2kw

Auto in the drum

0.36" x 82 ft WR 0.35" x 82 ft SR

10 x 4.5" 21.3 x 6.3 x 8.6"

#### 12000

12000lbs (5400kg) 6.0hp / 4.6kw 230:1 Auto in the drum 2.5 x 8.8" 0.4" x 82 ft WR 0.43" x 82 ft SR 10 x 4.5" 22.8 x 6.3 x 8.6"



# SPARTAN SERIES ELECTRIC WINCH

**Item Numbers:** 8000, 8000-SR 9500, 9500-SR 12000, 12000-SR

#### **FEATURES**

- Weather Sealed High Performance motor
- Heavy-Duty 3 Stage Gearbox
- Heavy-Duty Drum Supports
- Weather Sealed Solenoids
- Full Steel Planetary Gearing
- Full Load Holding Brake
- Every winch 100 % load tested
- Chip Resistant Gloss Paint Finish

- Galvanized steel cable
- 10ft Remote Handset
- · Heavy Duty Steel Roller Fairlead
- Heavy Duty Battery Leads
- Stainless Steel Mounting hardware
- Clevis hook







Superb high specification winch. Ideal for recovery and 4x4 applications. Outstanding features include high quality series wound double sealed motor with brass fittings, heavy duty waterproof contactors, double sealed drum on maintenance free bearings, quiet, efficient full steel planetary gearing.

Comes with stainless steel roller fairlead and fittings as standard. Complete with Heavy Duty integrated wireless remote. Available with Armortek Synthetic Rope and Aluminum Fairlead.

# **SPECIFICATION**

#### **S8000**

MOTOR: 12v:
GEARING:
BRAKING ACTION:
DRUM SIZE Dia x L:
CABLE Dia x L:
MOUN PATTERN:
DIMENSIONS:

**RATED LINE PULL:** 

8000lbs(3629kg) 4.6hp / 3.2kw 210:1 Auto in the drum 2.5 x 8.8" 0.3" x 95 ft 10 x 4.5" 21.3 x 6.3 x 8.6"



#### **S9500**

RATED LINE PULL: 9500lbs(4500kg) MOTOR: 12v: 4.6hp / 3.2kw **GEARING:** 230:1 **BRAKING ACTION:** Auto in the drum DRUM SIZE Dia x L: 2.5 x 8.8" CABLE Dia x L: 0.4" x 85 ft **MOUNT PATTERN:** 10 x 4.5" **DIMENSIONS:** 21.3 x 6.3 x 8.6"

#### S12000

12000lbs(5400kg) 6.5hp / 4.6kw 230:1 Auto in the drum 2.5 x 8.8" 0.4" x 85 ft 10 x 4.5" 22.8 x 6.3 x 8.6"

# SAMURAK

# SAMURAI SERIES ELECTRIC WINCH

Item Numbers: \$8000, \$8000-\$R \$9500, \$9500-\$R, \$12000, \$12000-\$R

### **FEATURES**

- All Brass (no corrosion) Series Wound Motor
- Double Sealed Motor
- Sealed Waterproof Contactor
- Steel Contactor Cover
- Double Sealed Drum (Gearbox/Motor)
- Sealed 3 Stage Planetary Gears
- Stainless Steel 4 Way fairleads
- Integrated Wireless Remote

- Galvanized steel cable
- 10ft Remote Handset
- Heavy Duty Stainless Steel Fairlead
- Heavy Duty Battery Leads
- Isolation switch
- Stainless Steel Mounting hardware
- Built In Wireless remote
- 5/16 hook







The ultimate winch for Extreme Terrain. Fully Sealed with an unbeatable line Speed of 65 ft/min. Outstanding features includes Huge 6.5 hp high quality double sealed motor with brass fittings, heavy duty waterproof contactors, double sealed drum on maintenance free bearings, quiet, fully sealed efficient full steel planetary gearing.

Complete with heavy duty integrated wireless remote. Available with Steel Rope or Armortek Synthetic Rope and Aluminum Fairlead.

# **SPECIFICATION**

**RATED LINE PULL:** 9500lbs(4500kg) **MOTOR: 12v:** 6.5hp / 4.5kw

**GEARING:** 110:1

BRAKING ACTION: Auto in the drum DRUM SIZE Dia x L: 2.5 x 8.8"

CABLE Dia x L: 0.4" x 98 ft

MOUNT PATTERN: 10 x 4.5"

DIMENSIONS: 22.7 x 6.3 x 8.5"



Layer of	Line pull
wire rope	lbs (kg)
1	9500 (4309)
2	7706 (3495)
3	6482 (2940)
4	5400 (2400)

Line pull	Line speed		Amp	draw
lbs (kg)	ft/min	m/min	12v	24v
0	65	19.8	80	45
4000 (1818)	12.5	3.8	300	175
6000 (2722)	11.81	3.6	400	230
9500 (4309)	8.86	1.9	530	335

# SANIURAL

SAMURAI 9,500 LB HIGH SPEED PERFORMANCE WINCH

Item Numbers: S9500HS S9500HS-SR

#### **FEATURES**

- All Brass (no corrosion) Series Wound Motor
- Double Sealed Motor
- Sealed Waterproof Contactor
- Steel Contactor Cover
- Double Sealed Drum (Gearbox/Motor)
- Sealed 3 Stage Planetary Gears
- Integrated Wireless Remote

- Wire rope 0.4" x 98ft
- 10ft Remote Handset
- Roller Fairlead (does not attach to winch)
- Heavy Duty Battery Leads
- Isolation switch
- Stainless Steel Mounting hardware
- Built In Wireless remote
- 5/16 hook





The narrow drum version of the best selling 9500. A total width of 17.2 inches ensures this is the perfect product for limited space. The 5.0hp motor delivers 9500lb of pulling power in space normally designed for Winches with half the power.

The Short Drum winch is the preferred choice of the British Military on specialist vehicles currently serving in action. Available with synthetic rope and aluminium fairlead, to give a total weight of 44 lbs.

# SPECIFICATION

**RATED LINE PULL:** 9500lbs(4500kg) **MOTOR: 12v:** 5.0hp / 3.5kw

**GEARING:** 230:1

**BRAKING ACTION:** Auto in the drum

**DRUM SIZE Dia x L:** 2.5 × 4.7" **CABLE Dia x L:** 0.4" × 46 ft **MOUNT PATTERN:** 5.9 × 4.5" **DIMENSIONS:** 17.2 × 6.3 × 10.7"



Layer of	Line pull
wire rope	lbs (kg)
1	9500 (4309)
2	7706 (3495)
3	6482 (2940)
4	5593 (2537)

Line pull	Line speed		Amp	draw
lbs (kg)	ft/min	m/min	12v	24v
0	23	7	80	70
3000 (1361)	12.5	3.8	170	140
6000 (2722)	9.8	3	260	210
9500 (4309)	6.4	1.9	380	270

# SAMURAK

# SAMURAI 9,500 LB SHORT DRUM WINCH

Item Numbers: S9500SD S9500SD-SR

### **FEATURES**

- Power in and Power out
- High Quality 5.0hp Series Wound Motor
- Heavy Duty Waterproof Contactors
- Full Steel Planetary Gearing
- Double sealed motor and drum
- Full Load Holding Brake
- Integrated Wireless remote

- 0.4" x 46ft Wire Rope
- 10ft Remote Handset
- Heavy Duty Stainless Steel Fairlead
- Heavy Duty Battery Leads
- Isolation switch
- Stainless Steel Mounting hardware
- Built In Wireless remote
- 5/16 hook





Our premium "Next Generation" Samurai range are even faster, with a lower current draw and now boast a revolutionary external brake, more capable of load holding & lowering, as well as ensuring there's no heat build up in the drum, perfect for Armortek Ropes.

Ideal for recovery and 4x4 applications. Outstanding features include high quality series wound double sealed motor with solid brass contacts, heavy duty 4 pin waterproof contactors, double sealed drum on maintenance free bearings and quiet, efficient full steel planetary gearing. Comes with Aluminium Hawse Fairlead and fittings as standard. The 12V version comes complete with heavy duty integrated wireless remote.

# SPECIFICATION

RATED LINE PULL: 14500 lbs (6577kg) 7.2hp / 5.4kw MOTOR: 12v:

**GEARING:** 253:1

**BRAKING ACTION:** External Brake DRUM SIZE Dia x L: 2.48 x 8.77" CABLE Dia x L: 0.43 in x 82 ft 0.4" x 83.6ft WR

**DIMENSIONS:** 23.3 x 6.3 x 9.8"



Layer of	Line pull
wire rope	lbs (kg)
1	14500 (6577)
2	11519 (5224)
3	9556 (4334)
4	8163 (3702)

Line pull	Line sp	Line speed		draw
lbs (kg)	ft/min	m/min	12v	24v
0	31.16	9.5	60	50
6000 (2728)	12.46	3.8	200	140
10000 (4545)	5.57	1.7	310	190
12000 (5443)	4.9	1.5	380	230
14500 (6577)	3.28	1.0	430	260

# **NEXT GENERATION**

SAMURAI 14500 LB

Item Numbers: S14500 S14500-SR

### **FEATURES**

- 4 Pin Waterproof Connector
- Solid Brass Contacts Direct to the Motor
- Silver Copper Motor with Copper Brush Holders
- Chip Resistant Powder Coated Finish
- Extensive Waterproof Sealing to IP68 Standard
- Removable Heavy Duty Hook
- Wireless 2.4G Upgraded Remote
- Stainless Steel 4 Way Fairleads
- HRC50 Full Steel Gears
- Revolutionary Design External Brake
- Laser Etched Extruded Aluminium Tie Bars
- 600 amp Silver Tip Contactor

- Galvanized steel cable
- 10ft Remote Handset
- Aluminium Fairlead or Heavy Duty Stainless Steel Fairlead
- Isolation switch
- Stainless Steel Mounting hardware
- Built In Wireless remote







Warrior Winches are excited to announce the arrival of the colossal Samurai 17500 & 20000lb Winches. Designed for the toughest of applications & tested in the most extreme environments imaginable, these Winches boasts a massive 7.0 & 7.5 hp Series wound motors respectively.

Double sealed drum on maintenance free bearings and quiet, fully sealed efficient full steel planetary gearing ensures these immense Warriors are ready for any battle.

# **SPECIFICATION**

#### S17500 Winch

**RATED LINE PULL:** 17 500lbs (7938kg) **MOTOR: 12v:** 17 500lbs (7938kg) 7.0hp / 4.9kw

**GEARING:** 430:1

**BRAKING ACTION:** Auto in the drum

 DRUM SIZE Dia x L:
 3.5 x 8.6"

 CABLE Dia x L:
 0.5" x 85 ft

 MOUNT PATTERN:
 10 x 4.5"

 DIMENSIONS:
 24 x 8.5 x 10"

 WEIGHT:
 147.7 lbs



Synthetic Rope version available

#### **\$20000 Winch**

**RATED LINE PULL:** 20 000lbs (9072kg) **MOTOR: 12v:** 7.5hp / 5.4kw

**GEARING:** 430:1

**BRAKING ACTION:** Automatic in the drum

DRUM SIZE Dia x L: 3.5 x 8.6"

CABLE Dia x L: 0.47" x 87 ft

MOUNT PATTERN: 10 x 4.5"

DIMENSIONS: 24 x 8.6 x 10.7"

WEIGHT: 158.7 lbs

# SAMURAK

# SAMURAI 17500 & 20000 LB WINCHES

Item Numbers: \$17500, \$17500-\$R \$20000, \$20000-\$R

#### **FEATURES**

- All Brass (no corrosion) Series Wound Motor
- Double Sealed Motor
- Sealed Waterproof Contactor
- Reinforced Plastic Contactor Cover
- Double Sealed Drum (G-box/Motor)
- Sealed 3 Stage Planetary Gears
- Stainless Steel 4 Way fairleads
- High Quality Steel Drum Supports

- 0.5" x 85ft Wire Rope
- 10ft Remote Handset
- Heavy Duty Stainless Steel Fairlead (Wire version)
- Alloy Fairlead (Rope version)
- Heavy Duty Battery Leads
- Isolation switch
- Stainless Steel Mounting hardware
- Wireless Remote





The Predator is designed for hard-core competition. Two powerful 7.2HP sealed motors provide performance that is truly out of this World. Together with a 108:1 ratio 3 stage planetary gearbox, this winch handles the most extreme off-road punishment.

With a surprisingly low draw of only 140 amps (at no load), the Predator also contains an innovative "multi stop" 10% ratchet brake design, which provides zero drag when returning the "cable in", and is situated away from the drum to prevent any damaging heat transferring to your Armortek or Synthetic rope.

The steel drum flanges are precision machined to 0.39" on either side to resist the unique loading characteristics of synthetic rope, while the Alloy Carbon gears are heat treated and tempered to 62HRc rating for extra strength. This Warrior from another dimension will mercilessly prey on its weaker rivals, hunting the opposition down. At 10kg lighter than any of its nearest competitors, with off-load line speeds from 65ft per minute & available with or without synthetic rope, there's a Predator out there, ready & waiting, for everyone!

# **SPECIFICATION**

 RATED LINE PULL:
 10 000lbs (4536kg)

 MOTOR: 12v:
 7.2hp / 5.4kw

 GEARING:
 108:1

 DRUM SIZE Dia x L:
 2.8 × 8.42"

 CABLE Dia x L:
 0.35" x 124ft

**MOUNT PATTERN:** 10 × 4.5" **DIMENSIONS:** 18.8 × 10.3 × 13.9"

**WEIGHT:** 99lbs

Layer of wire rope	Line pull lbs (kg)	Total Rope on drum ft(m)
1	10000 (4536)	18.4 (5.6)
2	8153 (3698)	41.0 (12.5)
3	6881 (3131)	68.9 (21)
4	5953 (2700)	101 (30.8)
5	5245 (2379)	131.2 (40)

Line pull	Line speed	Amp draw	
lbs (kg)	ft(m)/min 12v	12v	
0	66 (20)	140	
4000 (1816)	19.7 (6.0)	400	
6000 (2722)	16.7 (5.1)	560	
8000 (3629)	13.1 (4.0)	690	
10000 (4536)	10.5 (3.2)	790	

# PREDATER

# PREDATOR 10,000 LB DUAL MOTOR PERFORMANCE WINCH

*Item Number:* P10000D-SR

### **FEATURES**

- Dual 7.2HP (5.4KW) Sealed Motors
- Sealed Motor conforms to IP67
- Sealed Waterproof Contactor
- "Multi Stop" 10% Ratchet Brake Design
- Sealed 3 Stage Planetary Gears
- Alloy Carbon Gears hardened to 62HRc Rating
- No load speed of 65ft/min

- 0.35" x 124ft Synthetic Armortek Rope
- Wireless remote with LCD Display
- Heavy Duty Remote Control
- Silver Warrior Aluminum Fairlead
- Heavy Duty Battery Leads
- Stainless Steel Mounting hardware
- 12 Ton Competition Hook







The T1000 Series Winches are built specifically for military use, able to withstand extreme climates and temperatures. Features include hardened 3 stage planetary gears for reliable and efficient use in the harshest environments. The waterproof remote control has thermometric LED indicators signals to monitor the temperature of the motor and high temp lithium grease is used which doesn't solidify in extreme climates. Coupled with corrosion & chemical resistant matte black powder coat & a stainless steel fairlead makes this a formidable winch able to withstand whatever is thrown at it.

# **SPECIFICATION**

T1000-100 Elite Combat Winch

**RATED LINE PULL:** 10000lbs (4535kg) **MOTOR:** 12v: 4.6kw / 6.2hp

**GEARING:** 228:1

DRUM SIZE Dia x L: 63 x 217mm

**CABLE Dia x L:** 9mm x 25m (9.1 x 25m WR) **MOUNTING PATTERN:** 254 x 114.3mm **DIMENSIONS:** 638 x 214 x 289mm



#### T1000-145 Elite Combat Winch

RATED LINE PULL: 14000lbs (6350kg)

**MOTOR:** 12v: 5.4kw / 7.2hp

**GEARING: 228:1** 

DRUM SIZE Dia x L: 63 x 217mm

**CABLE Dia x L:** 11mm x 20m (11 x 23m WR) **MOUNTING PATTERN:** 254 x 114.3mm **DIMENSIONS:** 638 x 214 x 289mm

#### T1000-220 Elite Combat Winch

**RATED LINE PULL:** 22000lbs (9978kg)

**MOTOR:** 12v: 5.5kw / 7.4hp

**GEARING:** 450:1

DRUM SIZE Dia x L: 88 x 214mm

**CABLE Dia x L:** 14mm x 20m (13.8 x 24m WR)

**MOUNTING PATTERN:** 254 x 114.3mm / 254 x 165.1mm

**DIMENSIONS:** 638 x 214 x 289mm

# DX(/)

# T1000 ELITE COMBAT WINCHES

Item Numbers: T1000-100 T1000-145 T1000-220

### **FEATURES**

- IP68 Rated Military Grade Winch & Control Box.
- Hardened 3 stage planetary gears.
- Waterproof remote control with LED indicators.
- Corrosion & Chemical Resistant Powder Coat.
- High Temperature Lithium Grease that won't solidify in extreme temperatures.

- Armortek Winch Rope (or Steel Rope available)
- Aluminum Fairlead (or Stainless Steel Fairlead for wire rope)
- Stainless Steel Mounting hardware
- Hook





Compact, tough. A hydraulic winch for industrial and commercial applications. The unique patented steel gearing system combined with a highly efficient and powerful hydraulic motor ensures maximum performance over the full load range.

Complete with internal brake to ensure maximum control and load holding. Stainless steel roller fairleads and fittings are standard.

### **SPECIFICATION**

### 10 000 NH HYDRAULIC Winch

RATED LINE PULL:10 000lbs (4536kg)MAX LINE PULL:12 500lbs (5670kg)MOTOR:Hydraulic Dis 50 ml/r

**GEARING:** 33:1 **DRUM SIZE Dia x L:** 2.8 × 8.8" **CABLE Dia x L:** 0.4" × 87ft **MOUNT PATTERN:** 10 × 4.5" **DIMENSIONS:** 20 × 7.3 × 8.8"

#### 15 000 NH HYDRAULIC Winch

RATED LINE PULL: 15 000lbs (6804kg)

MAX LINE PULL: 17 000lbs (7711kg)

MOTOR: Hydraulic Dis 80 ml/r

**GEARING:** 37:1

**DRUM SIZE Dia x L:** 3.5 x 8.8" **CABLE Dia x L:** 0.5 x 87ft **MOUNT PATTERN:** 10 x 4.5"

**DIMENSIONS:** 20.9 x 8.1 x 9.7"



# NH SERIES HYDRAULIC WINCHES

Item Numbers: 10000NH 15000NH

#### **FEATURES**

- Patented Heavy Duty Gearing
- Integral, Automatic Failsafe Brake
- Spring Engaged Manual Freespool
- Stainless Steel fairlead and Fittings
- Rugged and compact for Long Life

- Steel cable (see below)
- Heavy Duty Roller Fairlead (10000/15000NH)
- 5/16 or 3/8 Hook









Compact, tough. A hydraulic winch for industrial and commercial applications. The special heat treated planetary gearing system combined with a highly efficient and powerful hydraulic motor ensures maximum performance over the full load range.

Complete with internal brake to ensure maximum control and load holding.

# **SPECIFICATION**

#### 10 000 NW Winch

**RATED LINE PULL:** 10 000lbs (4536kg) **MAX LINE PULL:** 12 500lbs (5670kg) **MOTOR:** Hydraulic Dis 100.8 ml/r

**GEARING:** 16:1

**DRUM SIZE Dia x L:**  $3.9 \times 9.9$ " **CABLE Dia x L:** 1/2"  $\times$  86 ft

**MOUNTING:** 14.6 x 4.5" (11.34 x 4.5") **DIMENSIONS:** 25 x 10.33 x 9.39"

#### 15 000 NW Winch

RATED LINE PULL: 15000lbs(6810kg)MAX LINE PULL: 17 500lbs (7954kg)MOTOR: Hydraulic Dis 160 ml/r

**GEARING:** 17.2:1 **DRUM SIZE Dia x L:** 5 x 10.6" **CABLE Dia x L:** 0.6" x 92 ft

**MOUNTING:** 11.9 × 4.5" (14.5 × 4.6") **DIMENSIONS:** 28.2 × 11.1 × 12"



# NW SERIES HYDRAULIC WINCHES

Item Numbers: 10000NW 15000NW

### **FEATURES**

- Patented Heavy Duty Gearing
- Integral, Automatic Failsafe Brake
- Spring Engaged Manual Freespool
- Rugged and Compact for Long Life
- Meets the requirements of SAE J706

- 86 ft x 1/2" steel cable
- 5/16 Hook
- Tensioner included







Tough and compact, the JP series are heavy duty hydraulic winches designed and tested for toughest applications.

Minimum rope to drum ratio of 10:1, multi disc frictional brake, balance valve and rope tensioner as standard.

Available from 10 tonne to 40 tonne. Manufactured to meet GJB82-86 National Military Standard.

# SPECIFICATION

- 1		ч	- 1	Ιъ
	V	4	J	

#### 13.5TJP 15TJP

RATED	LINE	PULL	(btm layer):	10	000	kg
				22	046 I	bs

**WORKING SPEED** (btm layer): 21.6ft/min\* **ARRESTER RESP PRESS: WORKING PRESSURE: OIL FLOW: DRUM SIZE: REC ROPE SIZE:** 

**WEIGHT:** 

**WEIGHT:** 

5 Mpa 20 Mpa 15-75 L/min 5.4x12.4" 157ft x 0.6" 363 lbs

13 500 kg 29762 lbs 24.6ft/min <2.5 Mpa 17 Mpa 110 L/min 131ft x 0.7"

578 lbs

15 000 kg 33069 lbs 20ft/min <2.5 Mpa 17 Mpa 110 L/min 15.7x8.3x13.4" 15.7x8.3x13.4" 230ft x 0.9" 628 lbs

#### **20TJP**

#### **30TJP** 40TJP

RATED LINE PULL (btm layer): 20 000 kg

**WORKING SPEED** (btm layer): 20ft/min **ARRESTER RESP PRESS: WORKING PRESSURE: OIL FLOW: DRUM SIZE: REC ROPE SIZE:** 

44092 lbs <2.5 Mpa 17 Mpa 120 L/min 20.9x8.3x13.4" 20.9x11x14.2" 197ft x 1" 650 lbs

30 000 kg 66138 lbs 18ft/min <2.5 Mpa 17 Mpa 120 L/min 197ft x 1.3" 1257 lbs

40 000 kg 88184 lbs 10ft/min <2.5 Mpa 17 Mpa 120 L/min 23.7x11x18.9" 213ft x 1.4" 1763 lbs

\*when oil flow 60L/min



# JP SERIES HYDRAULIC **WINCHES**

Item Numbers: 10TJP, 13.5TJP, 15TJP 20TJP, 30TJP, 40TJP

#### **FEATURES**

- Full Float Heavy Duty Planetary Gearing
- Multi Disc Friction Brake
- Minimum 10:1 Rope/Drum Ratio
- High Torque Industrial Motor
- Air and Manual Clutch Operation

- Heavy Duty Rope Tensioner as Standard
- Balance Valve as Standard





# WIDE RANGE AVAILABLE

#### **AMORTEK WINCH ROPE**

Armortek synthetic rope is 70% stronger than wire!

- Armortek weighs 6 times less than wire.
- Unlike wire, Armortek will not whiplash if broken.
- Armortek is rated at 70% stronger than wire.
- Armortek floats, wire doesn't.
- Armortek is coated to prevent abrasion.
- You don't have to worry about wire splinters.

Diameter	6mm (3/16")	9.5mm (3/8")
Breaking	3200 kg	7500 kg
Load	(7040 Lb)	(16500 Lb)

Part no: HW0884-CAD: 6mm x 16m (1/4" X 50') Synthetic Rope Part no: HW0932/45-CAD: 10mm x 14m (3/8"x 45") Synthetic Rope Part no: HW0932/85-CAD: 10mm x 26m (3/8" x 85') Synthetic Rope

#### **CENTURION WIRELESS REMOTE**



The ultimate remote for the professional user.

- Two-way Closelink wireless communication.
- Distinct source code so no interference from other remotes in the vicinity.
- Centurion devices are perfectly watertight.
- Output protection from short circuits & surges
- Manufactured in highly resistant moulded plastic with a rubber shell for protection.
- The absence of mechanical elements enables functioning in unfavourable environments, with a temperature range from -20°C to +55°C.





#### **ROLLER FAIRLEAD**

#### **ROLLER FAIRLEAD**



Part No: RFS150-CAD Stainless Fairlead With Hole Centres 255mm

#### **ALUMINIUM FAIRLEADS**



ALI450-CAD - 2500/3500 Winch. ALXT450-CAD - 4500 XT Winch.

#### **ALUMINIUM FAIRLEADS**



ALI950-CAD - 9500SD Winch. ALI015-CAD - 8000/9500/12000 Winch

#### **HOOK & RELEASE PIN**

Chrome 4 Way Roller Fairlead For

Part No: RFF400-CAD

Winches Up to 4500 lb.

#### **2T PULLY BLOCK**



Part No: PBK300-CAD 2 Tonne Pully Block Hook Type.

#### **4T PULLY BLOCK**



Part No: PBK900-CAD 4 Tonne Swingway Pully Block.

#### **8T PULLY BLOCK**



Part No: PBK150-CAD 8 Tonne Swingway Pully Block.

#### **WINCH KIT**

CHK014-CAD - 1/4 Steel Hook

CHK038-CAD - 3/8 Steel Hook

CHK516-CAD - 5/16 Steel Hook

#### **WINCH KIT PRO**

#### WINCH COVER SMALL



Part No: SWC001-CAD ATV Small Winch Cover.

## WINCH COVER



Part No: AWK001-CAD Warrior Bag, 1m Strop, 1/4 Shackle, 4T Pulley Block.



Part No: LWK001-CAD Warrior bag, 2m Strop, Gloves, 4.75 Shackle, 8T Pulley Block.



Part No: LWC003-CAD Winch Cover For Heavy Duty Winches up to 13000lbs.



## SHACKLES



SHK325-CAD - 3.25 Tonne Shackle. SHK475-CAD - 4.75 Tonne Shackle.



**TREE STROP** 

Part No: STP002-CAD 2m x 60mm - 14 Tonne tree strop.



**WINCH STOPPER** 

Part No: RWS001-CAD Rubber removable winch stopper.



Part No: PWM001-CAD Portable bumper.

#### **INSTALLATION PLATE**

#### **INSTALLATION PLATE**

#### **INSTALLATION PLATE**

#### **INSTALLATION PLATE**



Part No: IST900-CAD Winch installation plate for Winches up to 9 000lb.



Part No: IST500-CAD
Winch installation plate for 9500
SD Winches.



Part No: IST600-CAD
Winch installation plate for
Winches up to 15 000lb.



Part No: IST200-CAD Winch installation plate for Winches up to 20 000lb.

#### **WIRED REMOTE**



#### ATV HANDLEBAR REMOTE

#### **WIRELESS REMOTE**



Part No: HRO001-CAD Toggle (WARN Type) Hand Held Wired Remote.



Part No: HRO002-CAD Hand held remote for XT and A Series (air socket).



Part No: ATRO01-CAD ATV / Quad Handlebar Remote.



Part No: CPW001-CAD Wireless Remote Control With Key Fob Handset / Air Socket.

#### **WIRELESS REMOTE**



Part No: EWX001-CAD Heavy Duty Wireless Remote Control / NO Socket.

#### **WIRELESS REMOTE**



Part No: EWX002-CAD Heavy Duty Wireless Remote Control with Socket.

#### **WIRELESS REMOTE**



Part No: EWX003-CAD Wireless Remote Control for XT and A series (Air Socket).

#### **ATV CONNECTOR**



Part No: AIRS01-CAD ATV to Standard Socket Connector.

#### Y CABLE

#### **SOLENOID SET**



Part No: ATC012-CAD Solenoid Set For Up to 4500lbs Winch.

#### ISOLATION SWITCH



Part No: BAT001-CAD Battery Isolation Switch.

EXTENSION SOCKET



Part No: EXTO01-CAD Solenoid Box Extension Socket.

HD CONTACTOR



Part No: CON012-CAD 12v Heavy Duty Contactor.

Part No: AIRSO2-CAD

Y Cable For Dual Connection.

# WINCH UPGRADE KIT



Part No: AUKOO1-CAD Universal 12v Winch Upgrade Kit & Mini Thumbswitch.

#### **SNAP CONNECTOR**




Part No: QCC400-CAD 400 amp Snap Connector.

#### **6.5 HP 12V MOTOR**



Part No: EPW012-CAD 6.5 HP 12v Motor.



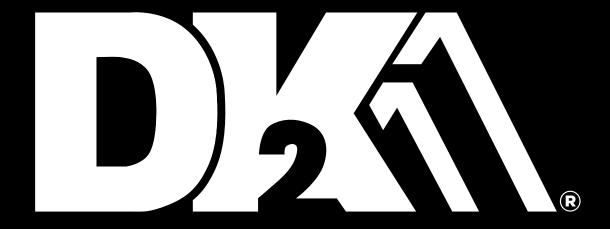

DK2 USA WEST 4301 S Valley View Blvd, Suite 10-11, Las Vegas, Nevada, 89103, United States DK2 CANADA 1080 Clay Avenue, Unit 2, Burlington, Ontario, L7L 0A1 , Canada DK2 USA EAST 3750 South Avenue, North Unit, Toledo, Ohio 43615, United States