

Thermoplastic

Pedestal Sump Pump

SPP03301K

1/3 HP

3550 GPH



- Corrosion-resistant, reinforced thermoplastic construction
- Durable Stainless Steel motor shaft
- Fan-cooled PSC motor with thermal overload protection
- Energy-efficient motor, only draws 3.7 Amps
- Adjustable Vertical float switch
- Designed to fit in basins 12" in diameter or larger
- 1-1/4" female NPT discharge
- 8 foot power cord



Performance


| Model No. | HP | Discharge Flow (GPH) | | | | Max. Lift |
|------------------|-----|----------------------|-------|--------|------|-----------|
| | | 0 ft. | 5 ft. | 10 ft. | 15FT | |
| SPP03301K | 1/3 | 3550 | 3000 | 2400 | 1680 | 20 ft. |

| Application | |
|---|---------------------------------------|
| Pedestal sump pump for typical residential applications | |
| Voltage | 115 |
| Hertz | 60 |
| Phase | Single |
| RPM | 1725RPM |
| Motor type | Permanent Split Capacitor (PSC) |
| Insulation | Class B |
| Circuit requirements | 15 AMP |
| Duty rating | Continuous* |
| Motor Shaft | Stainless steel |
| Upper motor bearing | Ball bearing |
| Lower motor bearing | Ball bearing |
| Cooling | Fan cooled |
| Motor protection | Auto reset thermal overload protector |

| Pump Specifications | |
|---------------------|--------------------------|
| Discharge size | 1-1/4" NPT |
| Pump Housing | Reinforced thermoplastic |
| Pump Base | Reinforced thermoplastic |
| Impeller material | Reinforced thermoplastic |
| Gasket | rubber |
| Liquid temp.range | 32°-77°F |
| Operation | Automatic |
| Fasteners | Steel |

| Automatic Switch Specifications | |
|---------------------------------|------------------------|
| Type | Vertical |
| Switch on point | 10" |
| Switch off point | 3" |
| Cord Length | 8' |
| Cord type | SJTW 18AWG/2C, UL list |

Performance

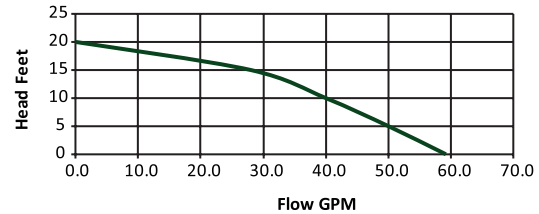

| Model | HP | Amps | Discharge Height(ft) | 0 | 5 | 10 | 15 |
|-----------|-----|------|----------------------|------|------|------|------|
| | | | | GPM | GPM | GPM | GPM |
| SPP03301K | 1/3 | 3.7A | | 59.2 | 50.0 | 40.0 | 28.0 |
| | | | | GPH | 3550 | 3000 | 2400 |

Dimensions

