



200 GALLON 3 POINT SPRAYERS



2-Nozzle Broadcast



8 ROLLER PUMP

- 12 GPM at 540 RPM - 22.5 GPM at 1000 RPM
- Max Pressure 300 PSI
- Max Speed 1200 RPM



PLUMBING KIT

- TeeJet Selector Valve and Pressure Relief/Regulator
- 22" Pro Series Spray Wand w/25' of 3/8" Hose
- Plumbing Kit



DIE CAST QUICK COUPLER

- Multi-Speed Die Cast Quick Coupler
- Easy PTO Connection



3 POINT CARRIER FRAME

- Connects To The 3-Point Hitch On A Tractor
- CAT I Direct, CAT II Direct, CAT II Quick, and CAT III Narrow Quick
- Provides Strength and Support To The Tank



2-NOZZLE BROADCAST

- 32 Foot Spray Coverage



12-NOZZLE BOOM

- 20 Feet Spray Coverage



3PT-200-8R-1225FX4




3PT-200-8R-2BB



3PT-200-NR-1225FX4

THIS SPRAYER CAN BE USED WITH:

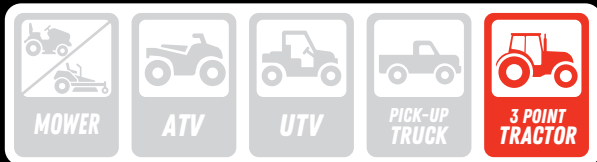

Sprayer Model	Sprayer Weight	Water Weight	Sprayer W/Water
3PT-200-6R-1225FX4	395 lbs	1668 lbs	2070 lbs
3PT-200-6R-2BB	355 lbs	1668 lbs	2030 lbs
3PT-200-NR-1225FX4	380 lbs	1668 lbs	2050 lbs

Model #	Code #	Tank Size	Shipping Weight	Carton Size	Shipping Class	Cubic Feet	Ship Via	UPC Code
3PT-200-8R-1225FX4	5303767	200 Gallon	415#	51 x 46 x 89	150	121	LTL	733029126368
Includes: 8 Roller Cast Iron Pump, Quick Coupler And 22" Pro Series Spray Wand W/ 25' Of Hose; 12-Nozzle FX4 Boom								
3PT-200-8R-2BB	5303768	200 Gallon	375#	51 x 46 x 60	150	82	LTL	733029126375
Kit Includes: 8 Roller Cast Iron Pump, Quick Coupler And 22" Pro Series Spray Wand W/ 25' Of Hose; 2 Broadcast Nozzles								
3PT-200-NR-1225FX4	5303769	200 Gallon	400#	51 x 46 x 89	150	121	LTL	733029126382
Includes: 22" Pro Series Spray Wand W/ 25' Of Hose; 12-Nozzle FX4 Boom; Plumbing Kit Assembly; Pump and Quick Coupler Not Included								

FOR DETAILED SPECS FIND ALL PRODUCT MANUALS AND PARTS BREAKDOWNS AT FIMCOINDUSTRIES.COM/MANUALS