


TARTER®

# 3-POINT Quick Hitch

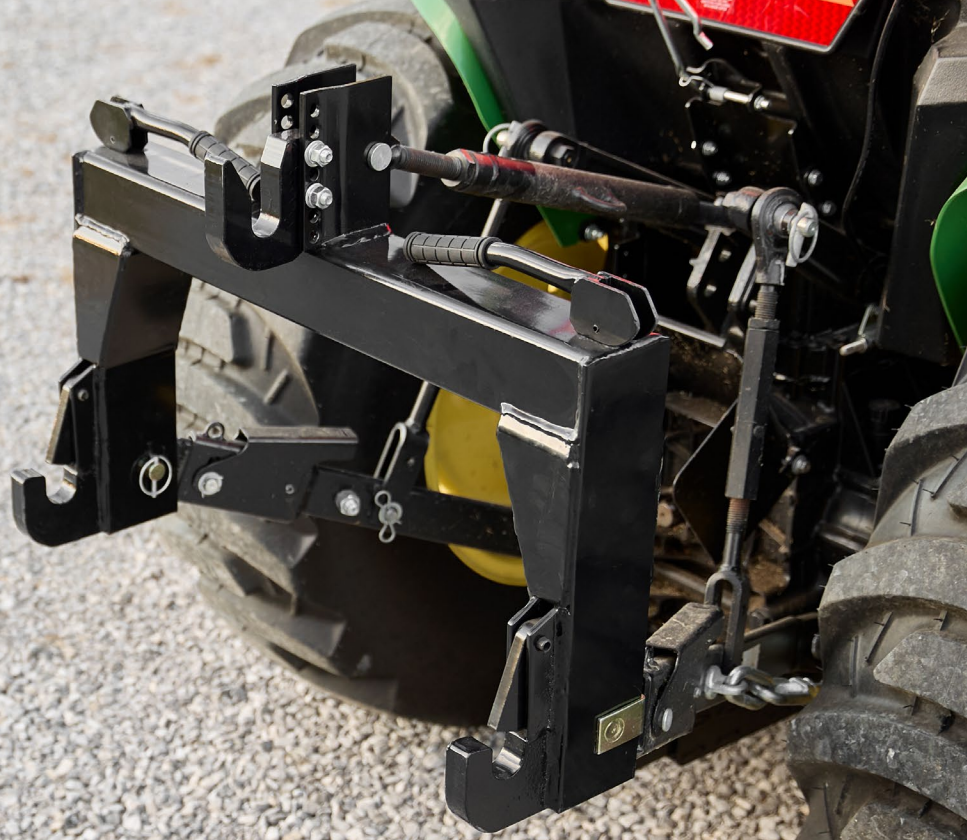

1.800.RED.GATE | tarterusa.com

Whether cultivating, towing, or cutting fields and pastures, the 3-Point Quick Hitch is your go-to solution for enhanced productivity on the farm. Our quick hitch meets ASABE S278.6 Category 1 fitment specifications to ensure a reliable connection with your compatible implements. It has a 3,000 lb lift capacity to handle heavier equipment such as rotary tillers and cutters, and the spring-loaded, locking handles feature rubber grips for safe, non-slip operation.

Tractor attachment pins included.

Overall Width	31.88"
Overall Height	23.62"
Overall Length	8.38"
Weight	74 lbs
Lower hook inside clearance width	27.03"
Lower hook outside clearance width	29.25"
Lower hook pin/bushing diameter allowance	1.5"
4 position adjustable top hook	14.875" - 18.125" hook height
Top link hook pin/bushing diameter allowance	1.3"
Part Number	QH201BL

Rubber Grip Handles



1.5" Pin / Bushing Hooks  
ASABE S278.6 Category 1 Spec.



**NOTE:** Utilizing the quick hitch requires operators to install bushings (sold separately) on the upper and lower implement hitch pins. Adding bushings ensures the implement sits securely on the quick hitch and functions correctly when in use.