

Floating Guide Post

Floats from 48 to 60 in.

Assembly/Installation Instructions


Black Part ID: 86568
White Part ID: 86576



The Floating Guide Post features the ability to adjust the overall height from 48 to 60 in. The metal tube is made from heavy-duty 14 gauge steel, pre-galvanized, and powder coated for a durable finish. It features a 30 degree slant through the bottom 18 in. to allow for varying hull shapes. The PVC pipe is non-marring, black or white in color and designed to hide the floating slot and holes for a clean look.

This kit contains the following components:

1	43042WHA	White PVC Post	2
or			
1	43042A	Black PVC Post	2
2	43034	14 ga. Post Weldment	2
3	12215	O Ring	4
4	12216	2-1/4" L Barrel Pin	2
5	48672	Cap End 2x2 black	2
6	48678	Damper Side Mount	2
7	10627	Nylock Nut 3/8-16, Zinc Grade 2	16
8	10502	Flat Washer 3/8-16, Zinc	16
9	83074-1Z	U-bolts 3/8" X 3.19" X 3.75" Zinc	4
10	83075-1Z	U-bolts 3/8" X 4.19" X 3.75" Zinc	4
11	83073Z	U-Bolt 3/8" X 2.19" X 3.5" Zinc	4
12	44049	Weldment Side Guide	2

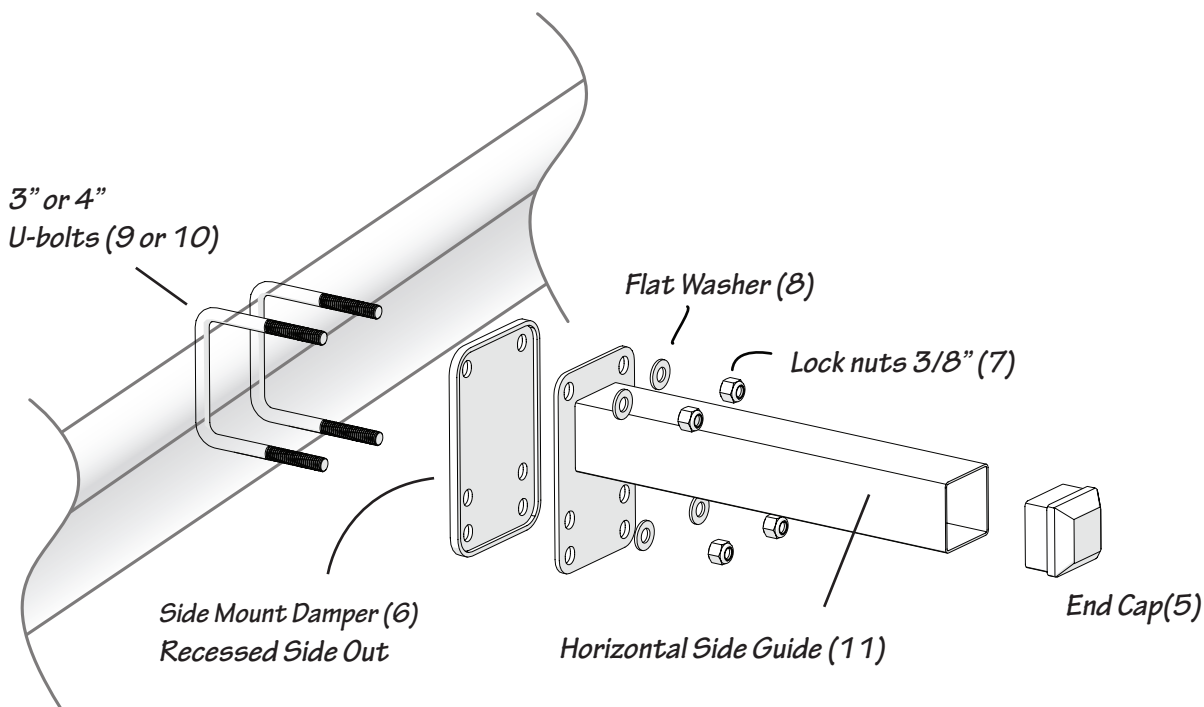


WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer. For more information go to: www.P65Warnings.ca.gov

Instructions #08329 (A1704- Rev. 7/3/243)

TIE DOWN
 MANUFACTURING INGENUITY

404-344-0000 • www.tiedown.com
 605 Stonehill Drive SW, Atlanta, GA 30336
sales@tiedown.com

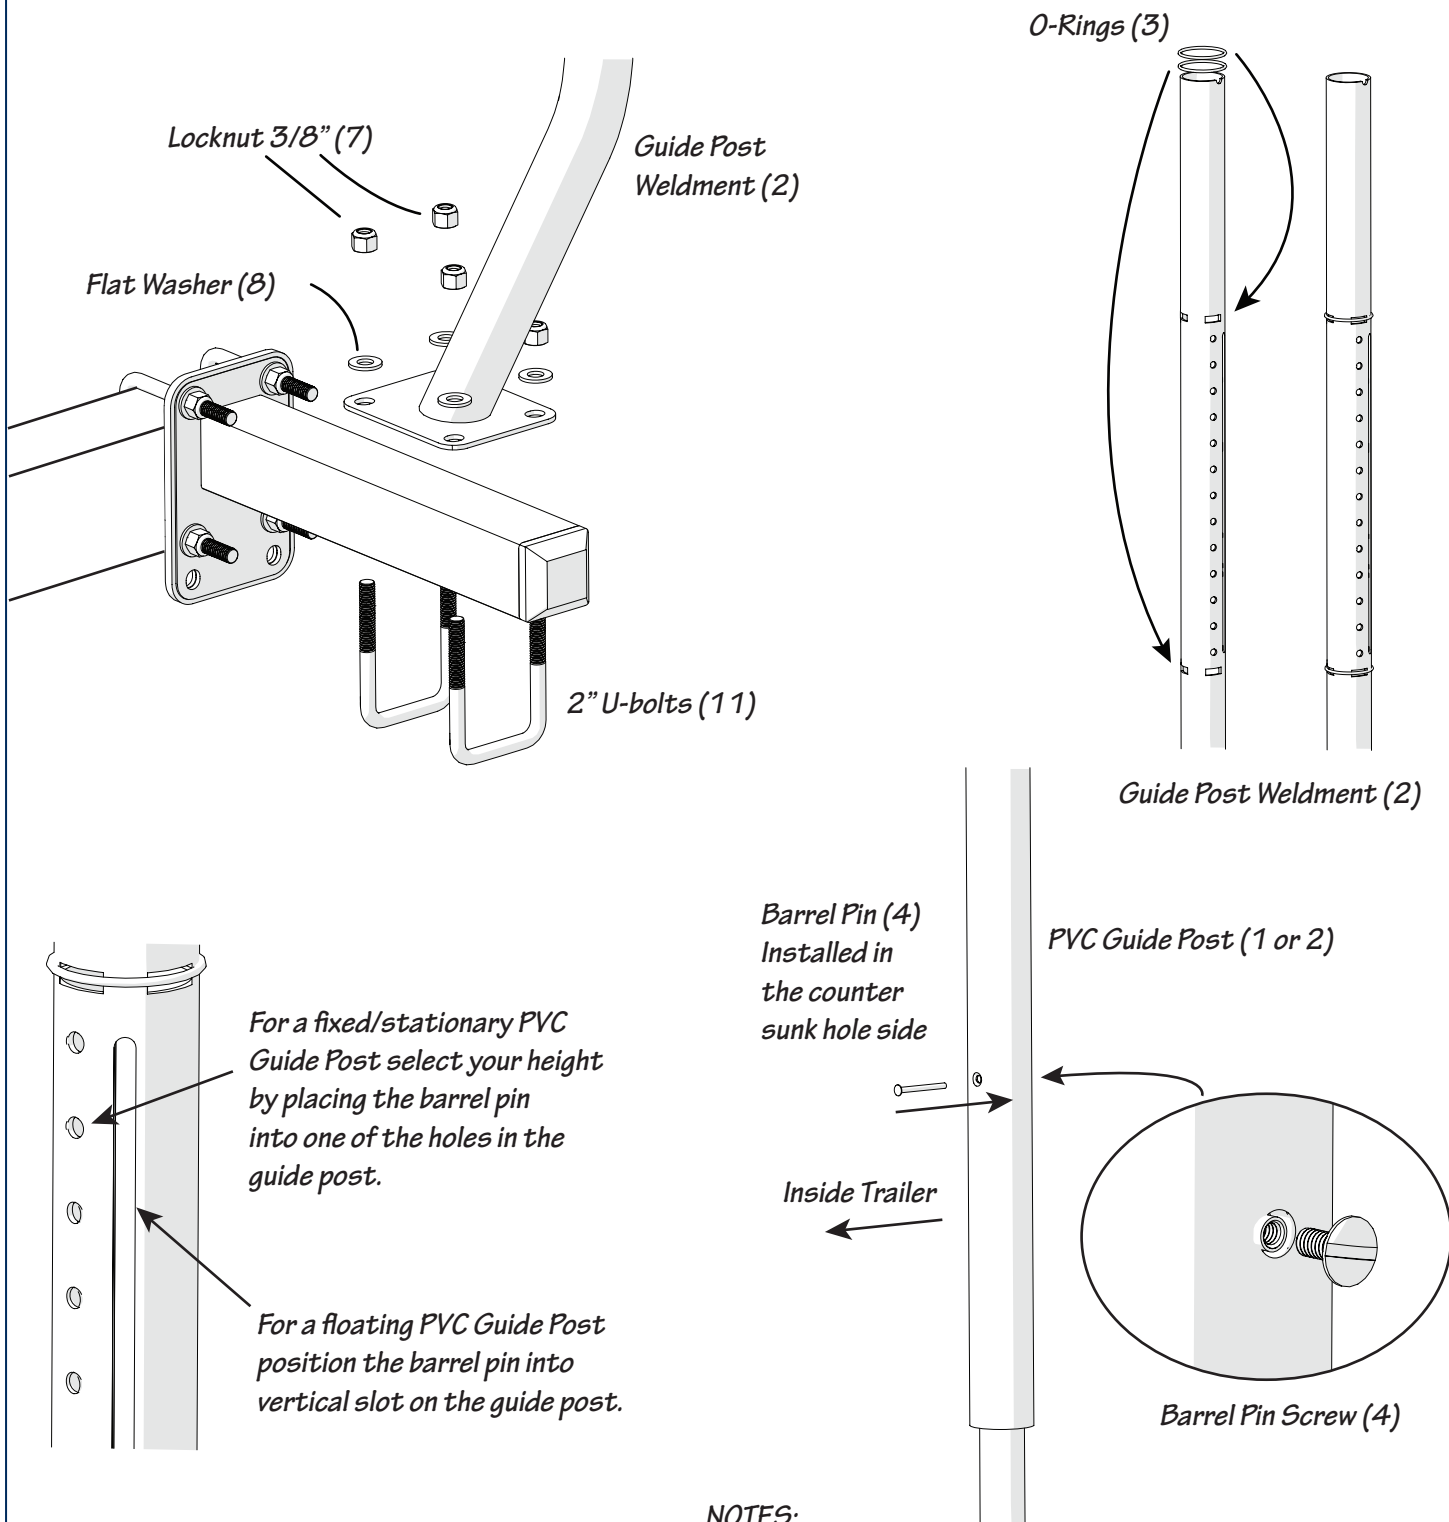

NOTES:

- * On the PVC tube, there is counter sunk on one side, this is for the barrel pin head. The counter sunk hole should face inside towards the trailer/boat.
- * Consider applying Loctite or equivalent to the barrel pin to permanently secure your preferred PVC settings